





Inspections Plus, Inc.




6/5/17

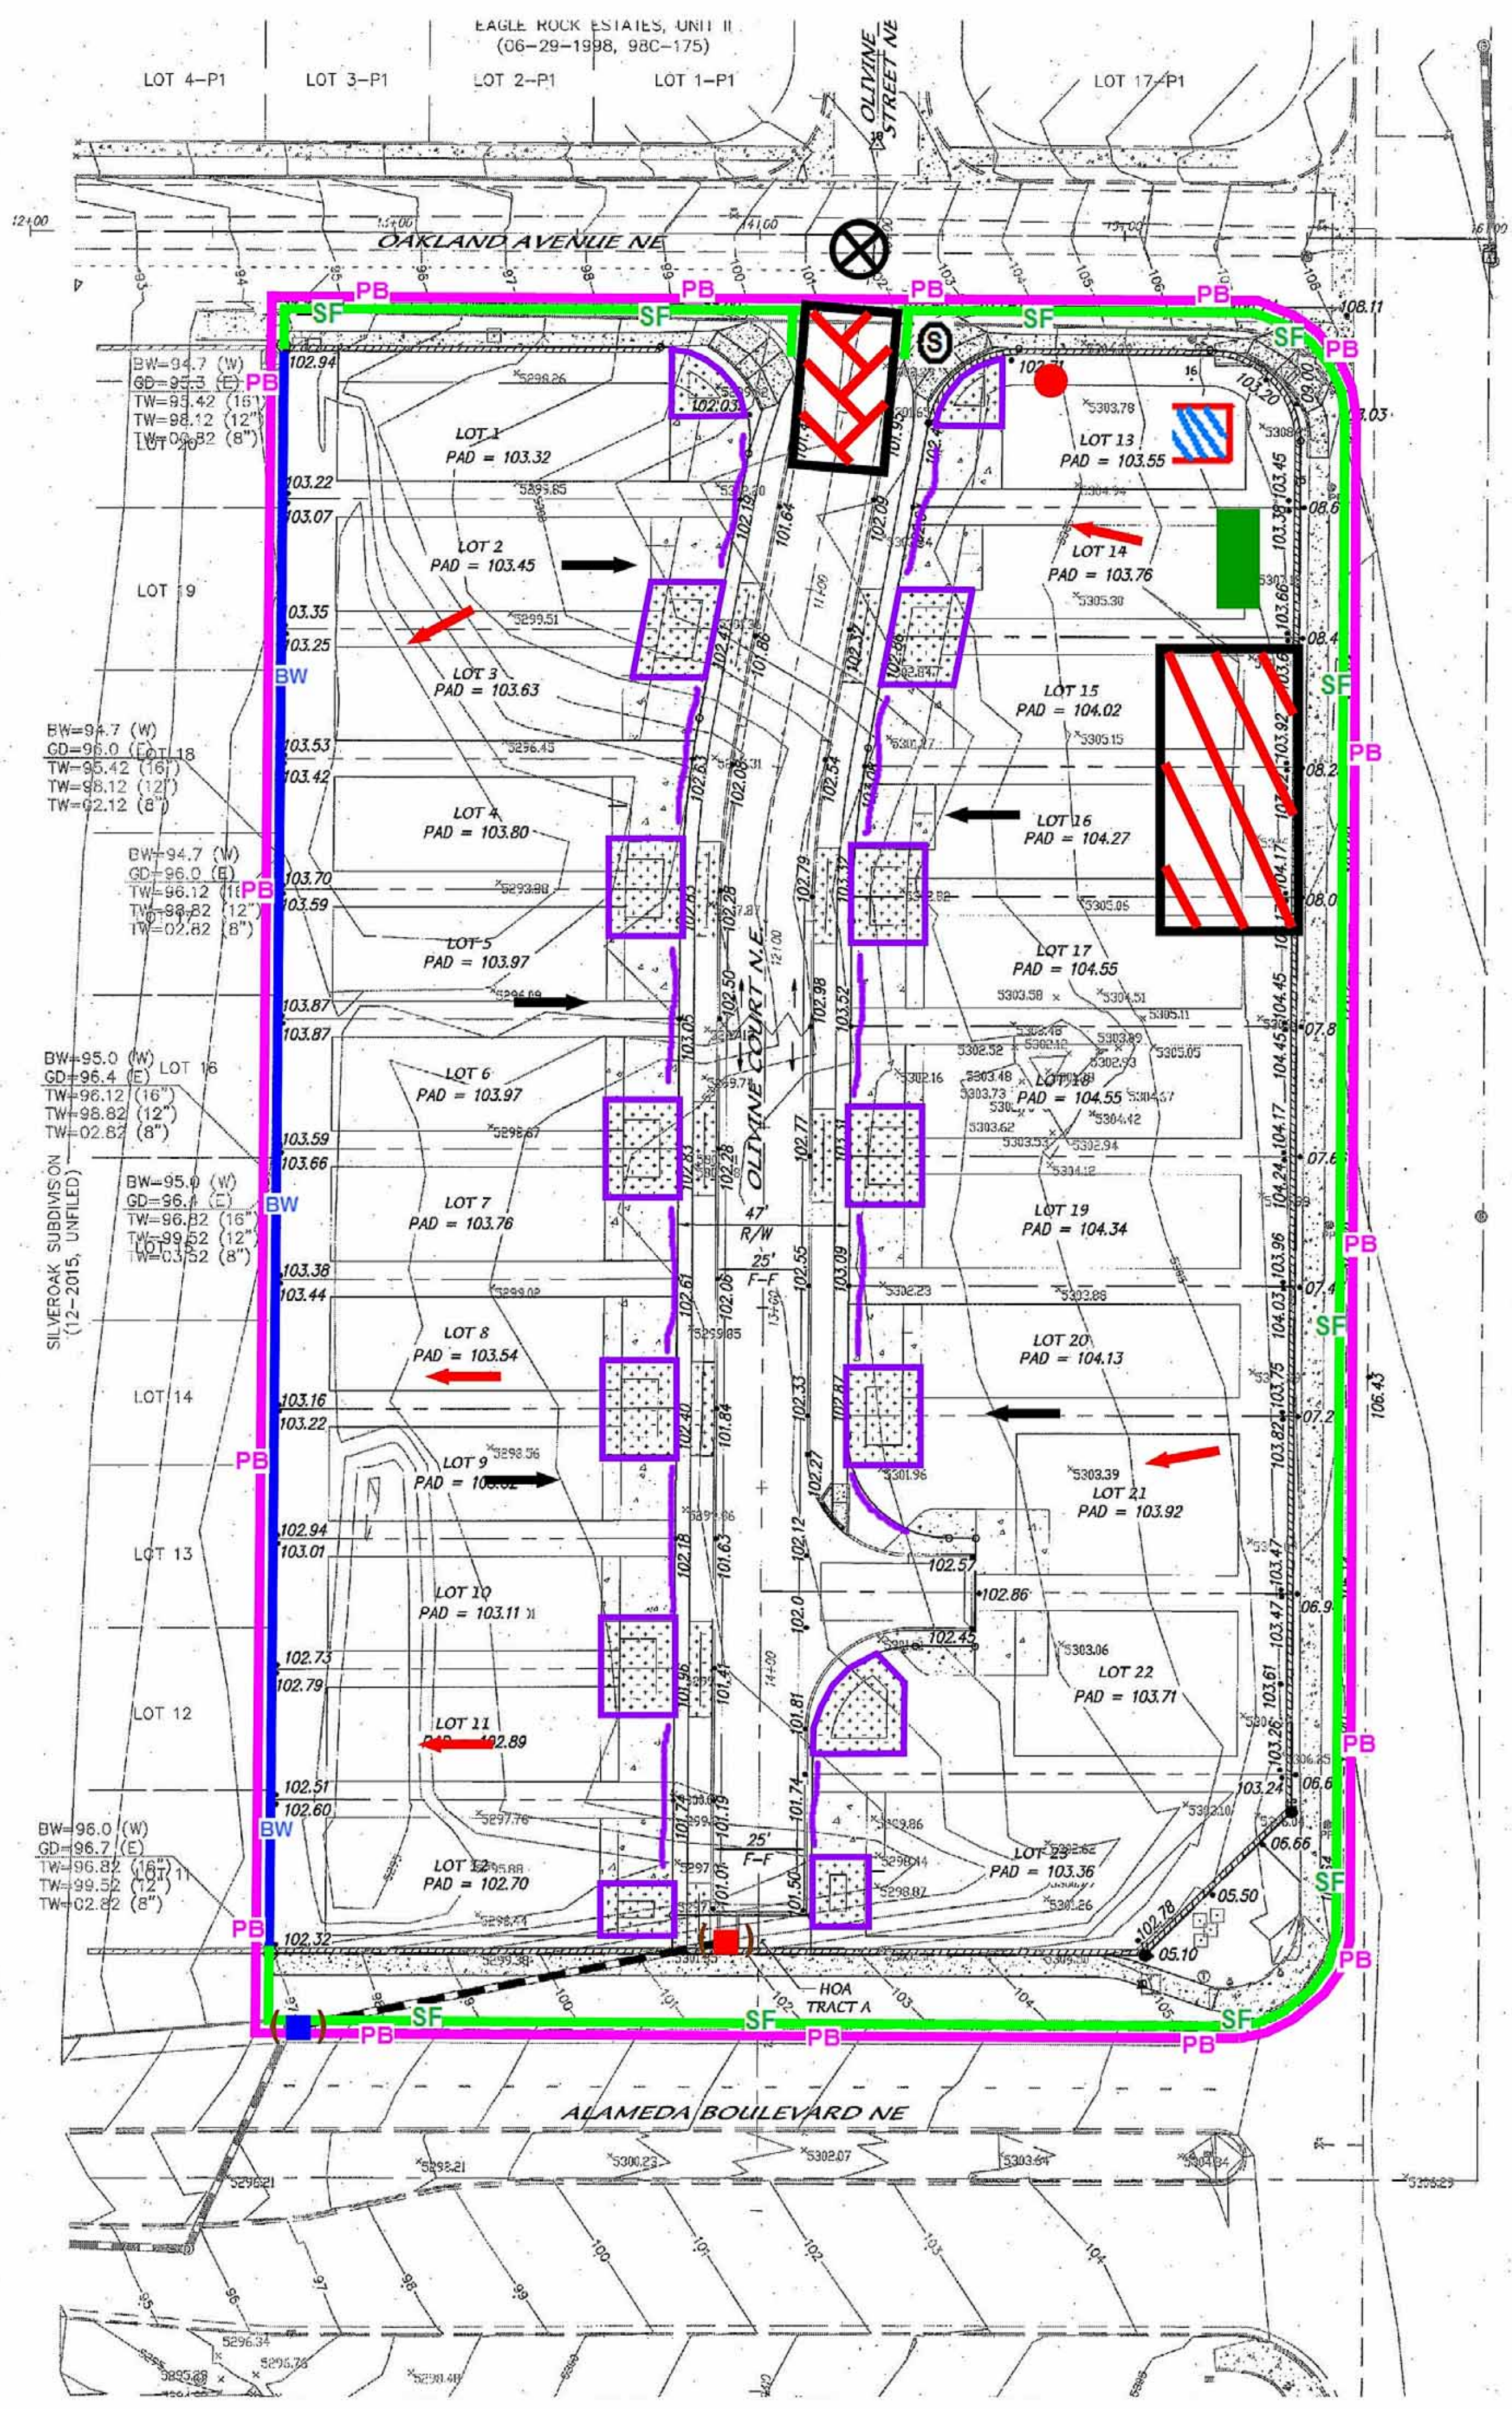

EAGLE ROCK ESTATES, UNIT III
(05-13-1999, 99C-118)
LOT 9-P1

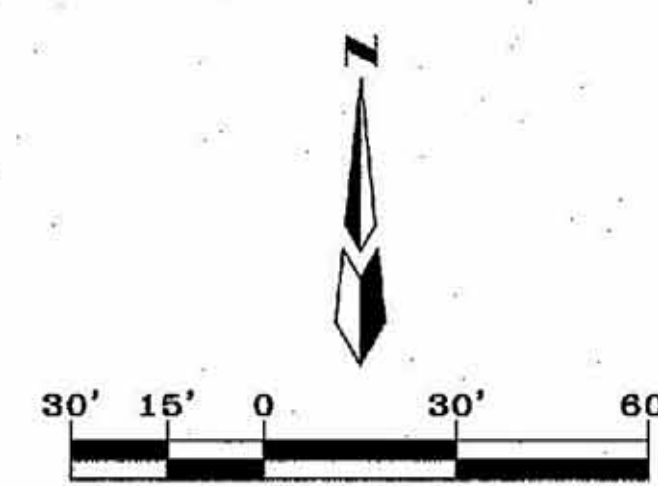

When doing work in the City ROW (e.g. sidewalk, drive pads, utilities, etc...) prevent dirt from getting into the street. If dirt is present in the street, the street should be swept at the end of each day or during the day if rain is imminent or if the contractor introduces water into the street.

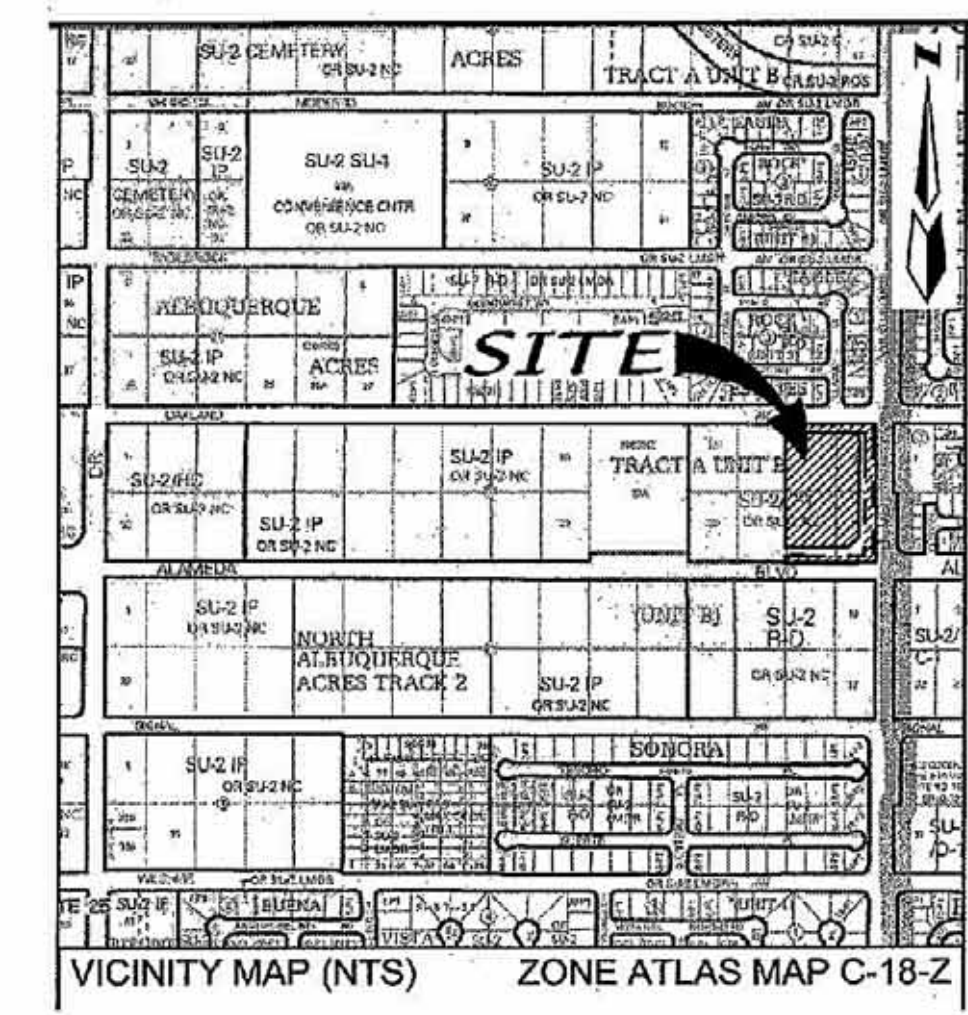

Legend

Erosion Sediment Control Plan

- PB** Project Perimeter & Disturbed Area
- SF** Silt Fence
- Pre Flow
- Flow
- ~~~~~** Post Development Swale
- ⊗** Outfall
- Ⓢ** Posting Sign
- Post Construction Ponding
- ▨** Staging Area
- ▧** Stabilized Construction Entrance
- Trash Receptacle
- Chemical Toilet
- Concrete Washout
- BW—** Existing Block Wall
- ()** Proposed inlet with protection
- ()** Existing inlet with protection

Oakland Ridge Subdivision

Receiving Waters and Critical Habitat: Rio Grande is located 4 miles to the NorthWest.

Impairments: Pathogens; PCB in fish tissue; Dissolved Oxygen; Temperature