

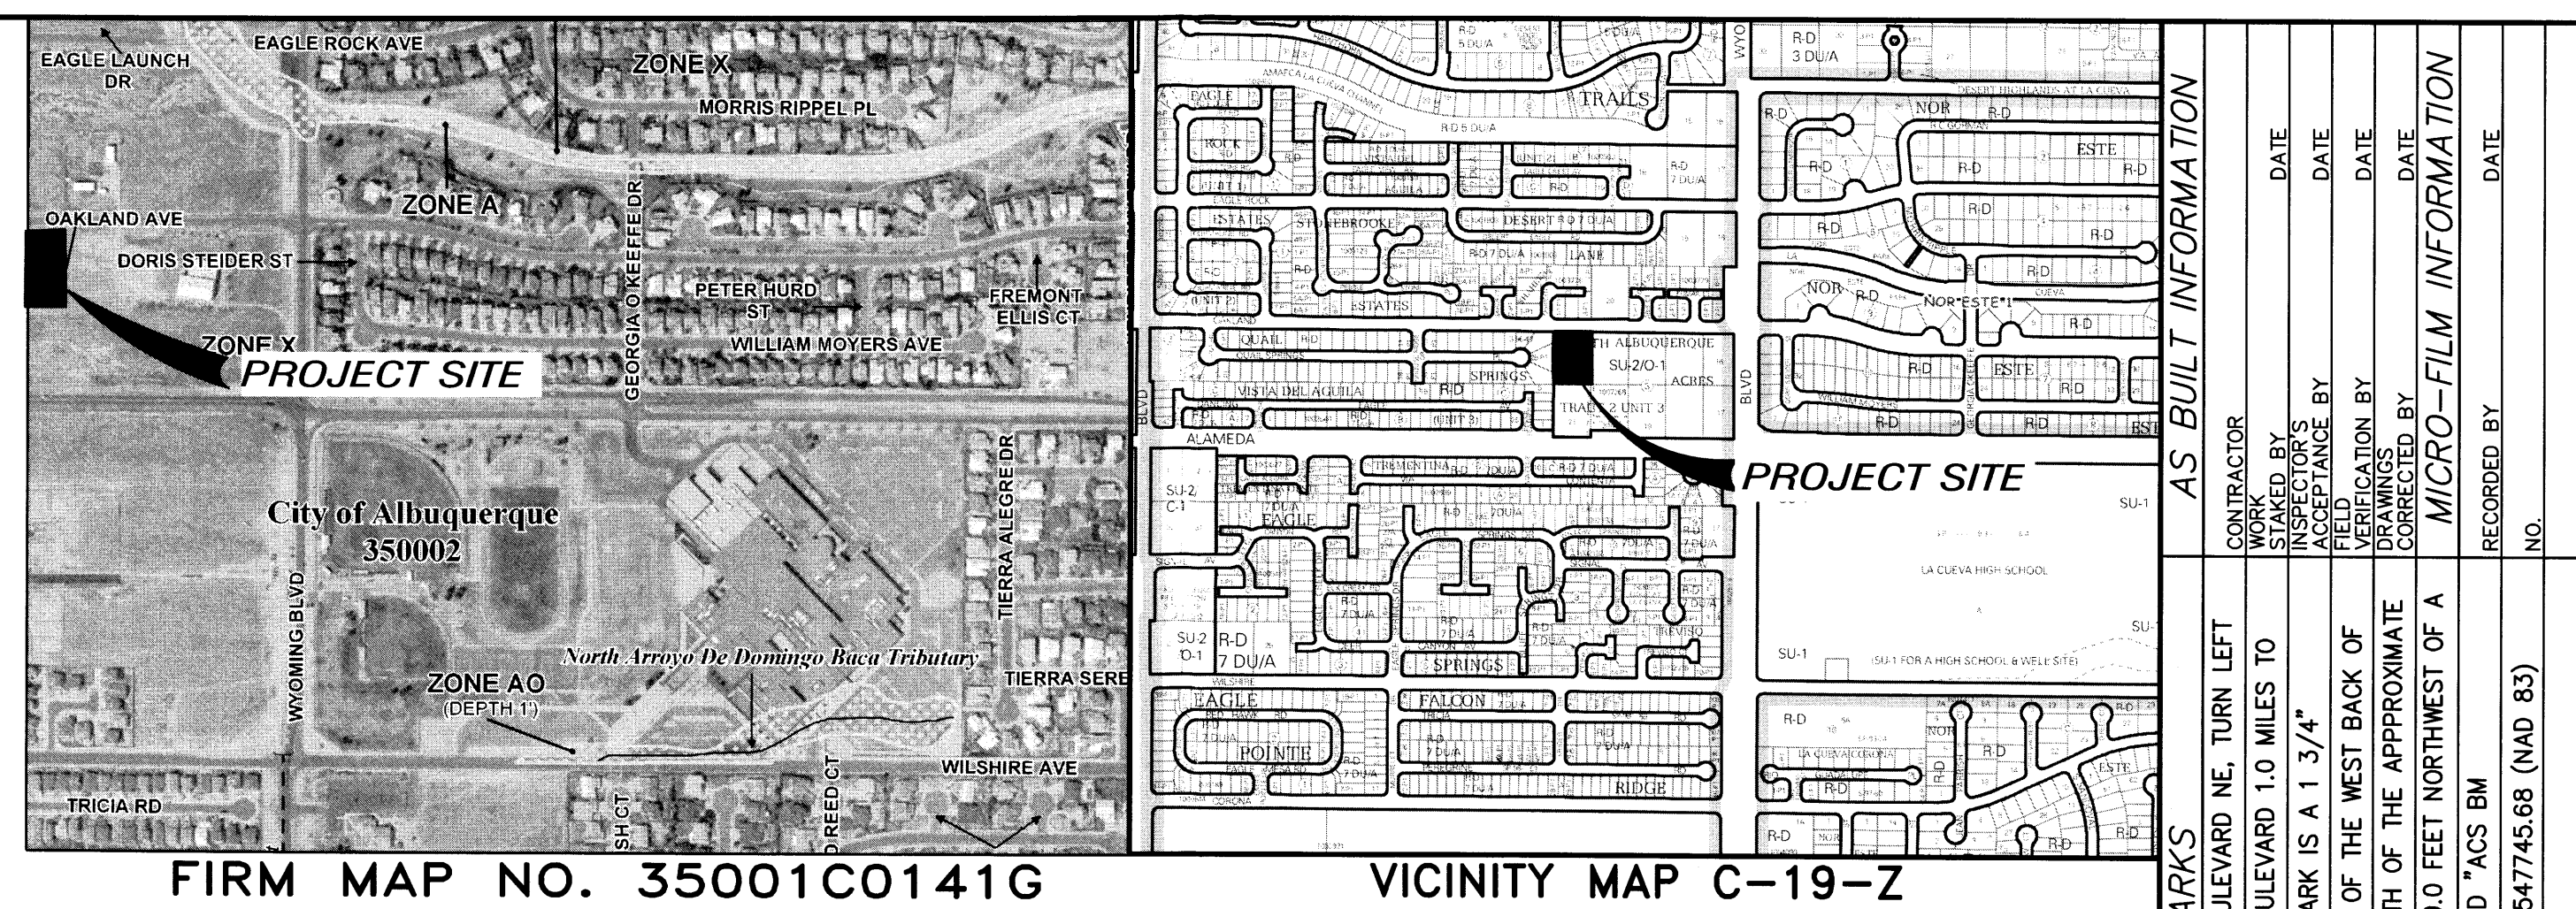


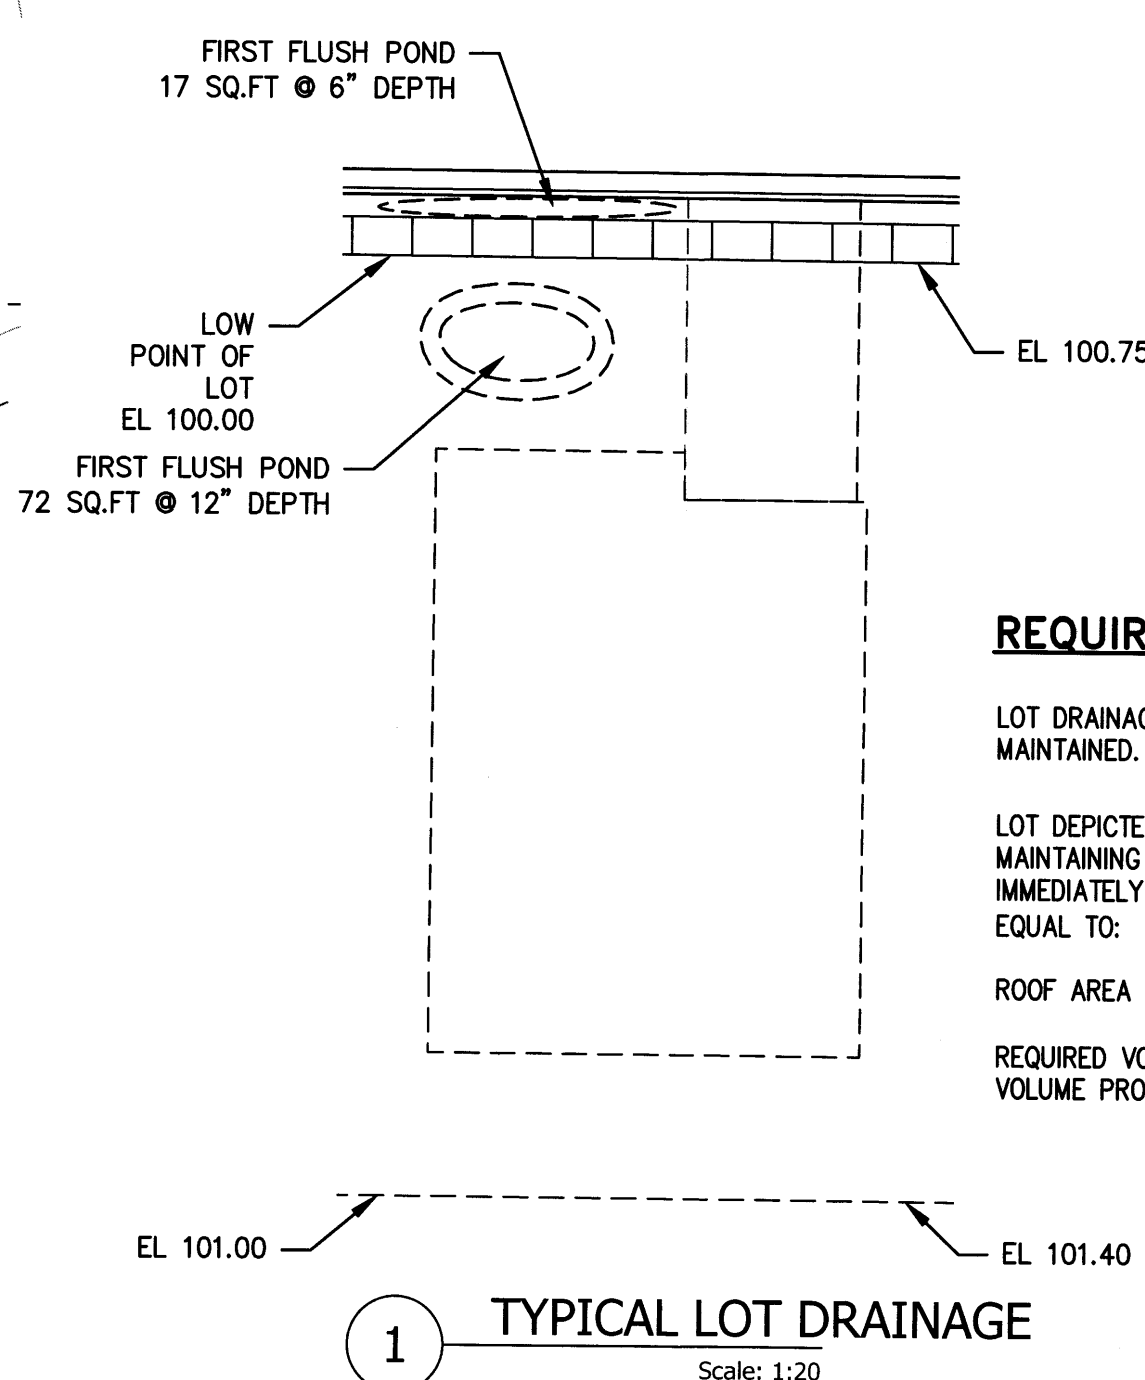

	$C=19-2$	
--	----------	--

[illegible]

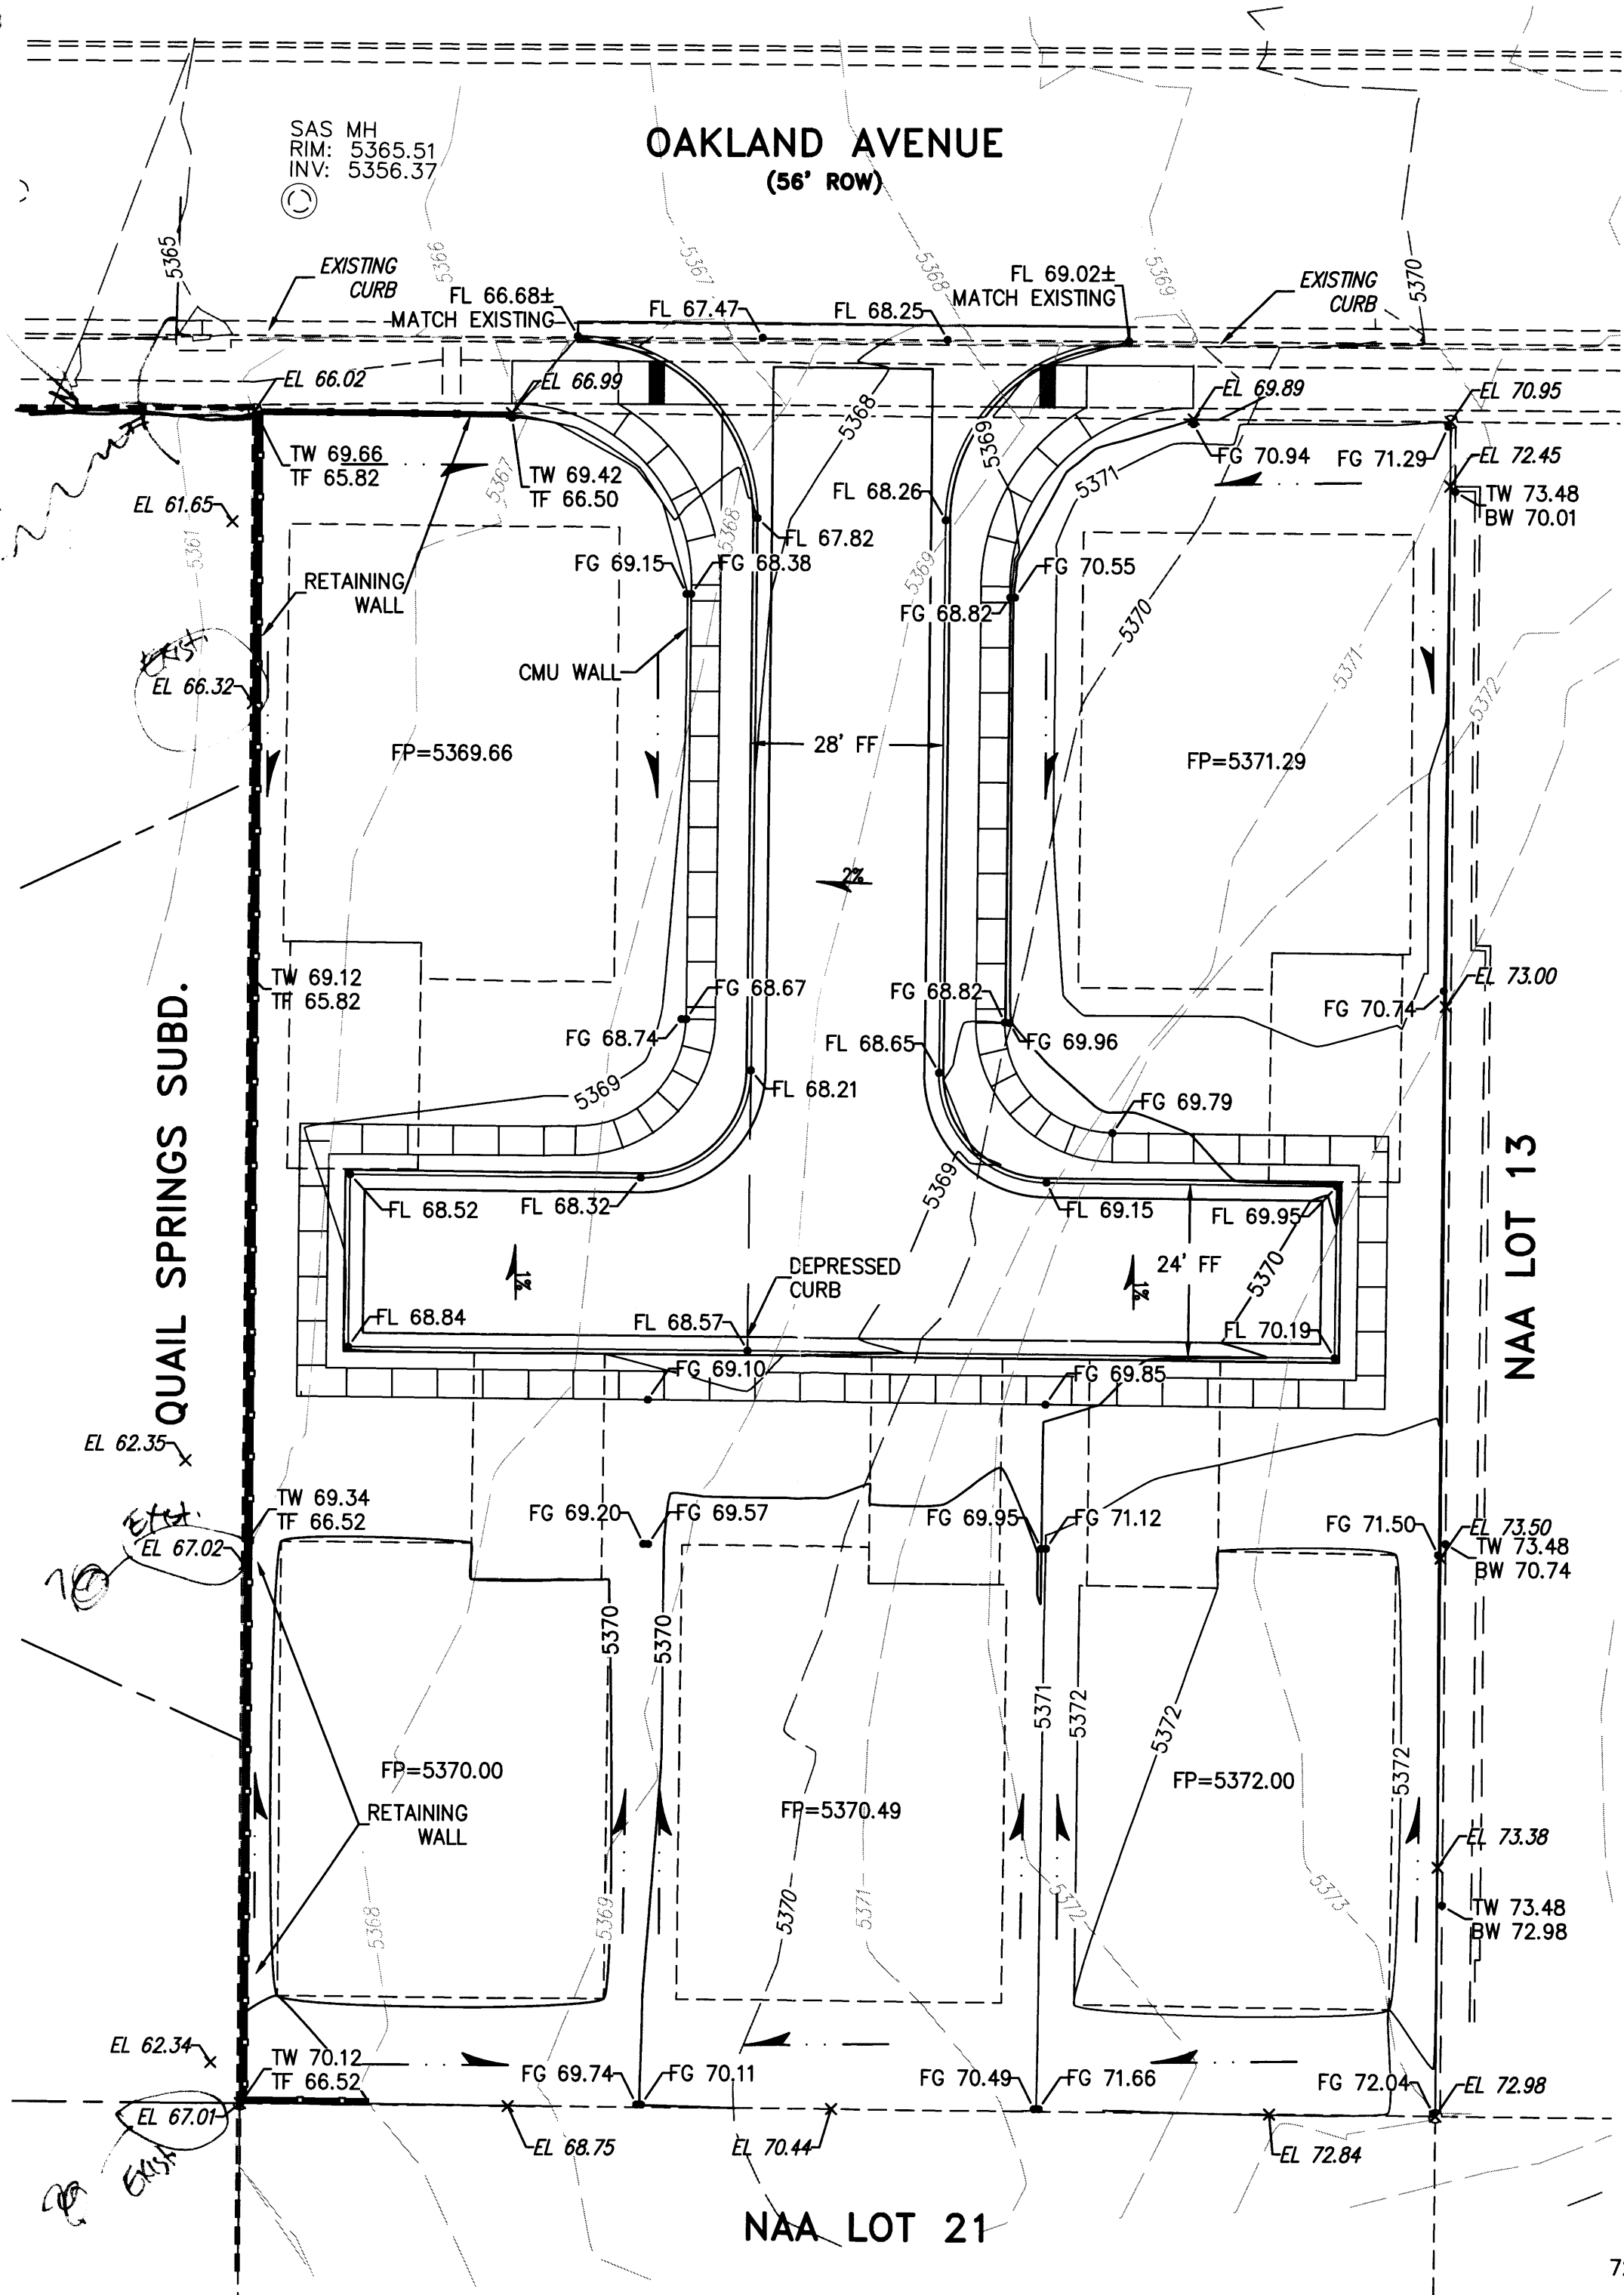

DRAINAGE INFORMATION

LOCATION & DESCRIPTION
THE PROPOSED SITE IS 0.72 ACRES LOCATED ON THE SOUTH SIDE OF OAKLAND AVENUE WEST OF WYOMING BLVD. AS SEEN ON THE VICINITY MAP. THE SITE WAS DEVELOPED AS AN ATHLETIC FIELD AND BUILDINGS. THE ADJACENT PROPERTIES TO THE WEST ARE DEVELOPED HIGHER DENSITY WALLED COMMUNITY. TO THE EAST IS THE CONSTRUCTION OF A GROUP LIVING SITE. THE PROPOSED DEVELOPMENT WILL BE FIVE (5) SINGLE FAMILY RESIDENTIAL LOTS ON A CUL-DE-SAC.

FLOODPLAIN STATUS

THIS PROJECT, AS SHOWN ON FEMA'S FLOOD INSURANCE RATE MAP 35001C0141 G, DATED APRIL 2, 2002 IS NOT WITHIN A DESIGNATED 100-YEAR FLOODPLAIN. AN EXHIBIT WITH THE SITE SHOWN ON THE FIRM PANEL IS INCLUDED ON THIS SHEET.

METHODOLOGY

THE HYDROLOGY FOR THIS PROJECT WAS ANALYZED USING AHYMO SOFTWARE.

PRECIPITATION

THE 100-YR 6-HR DURATION STORM WAS USED AS THE DESIGN STORM FOR THIS ANALYSIS. THIS SITE IS WITHIN ZONE 3 AS IDENTIFIED IN THE CITY OF ALBUQUERQUE DEVELOPMENT PROCESS MANUAL, SECTION 22.2.

EXISTING DRAINAGE

THE SITE IS WITHIN THE AREA OF THE NORTH A ALBUQUERQUE AGERS DRAINAGE MASTER PLAN. HISTORIC DRAINAGE WHICH ENTERED THE SITE FROM THE EAST HAS BEEN DIVERTED TO OAKLAND AVE. BY DEVELOPMENT AND WALL (SEE C190062). NO OTHER ADJACENT PROPERTIES DRAIN TO THIS SITE. THE LAND USE PERCENTAGES OF THAT STUDY ARE UTILIZED IN THE ANALYSIS LISTED BELOW. THIS SITE DRAINS TO THE EXISTING CURB AND GUTTER IN OAKLAND AVENUE.

DEVELOPED CONDITION

THIS SITE WILL BE DEVELOPED WITH A SINGLE STREET INTERCEPTING ALL OF THE SITE RUNOFF. THE RUNOFF WILL FREE DISCHARGE INTO OAKLAND AVENUE. OAKLAND AVENUE WILL CONVEY FLOW ALONG THE CURB TO INLETS LOCATED WEST OF THE SITE IN OAKLAND AVENUE. THE 0.16 CFS INCREASE FOR THE 100-YEAR PEAK RUNOFF, DUE TO THIS DEVELOPMENT IS INSIGNIFICANT AND WILL HAVE MINIMAL IMPACT ON DOWNSTREAM FACILITIES.

HYDROLOGIC DATA - NAADMP

BASINS	AREA (acres)	LAND TREATMENT PERCENTAGES BY TYPE				YIELD (cfs/ac)	Q ₁₀₀ (cfs)	V ₁₀₀₋₂₄ (acft)
		A	B	C	D			
A	0.72	0	25	15	50	4.05	2.90	0.106

HYDROLOGIC DATA - PROPOSED

BASINS	AREA (acres)	LAND TREATMENT PERCENTAGES BY TYPE				YIELD (cfs/ac)	Q ₁₀₀ (cfs)	V ₁₀₀₋₂₄ (acft)
		A	B	C	D			
A	0.72	0	0	45	55	4.28	3.06	0.112

LEGAL DESCRIPTION

ALBESIA SUBDIVISION
(BEING A REPLAT OF LOT 12, BLOCK 3, UNIT 3, TRACT 2)
WITHIN NORTH ALBUQUERQUE ACRES
IN PROJECTED SECTION 17, TOWNSHIP 11 NORTH, RANGE 4 EAST
ELENA GALLEGOS LAND GRANT NEW MEXICO PRINCIPAL MERIDIAN
CITY OF ALBUQUERQUE BERNALILLO COUNTY, NEW MEXICO

REQUIRED FIRST FLUSH VOLUME

LOT DRAINAGE AS DEPICTED ON THIS PLAN SHALL BE MAINTAINED.

LOT DEPICTED HEREON SHALL BE RESPONSIBLE FOR MAINTAINING FIRST FLUSH RUNOFF RETENTION ON THE LOT IMMEDIATELY PRIOR TO DISCHARGE. THE VOLUME SHALL BE EQUAL TO: ROOF AREA * (0.44-0.10)/12 IN CUBIC FEET.

ROOF AREA = 2734 SQ.FT.

REQUIRED VOLUME = 2734 * (0.44-0.10)/12 = 78 CU.FT.

VOLUME PROVIDED = 80 CU.FT.

LEGEND

- FLOW ARROW
- SLOPE ARROW
- PROPOSED ELEVATION
- EXISTING ELEVATION
- GRADE BREAK
- EXISTING CONTOUR
- EXISTING CONTOUR
- PROPOSED EASEMENT
- PROPOSED GRADE
- EXISTING WALL
- PROPOSED WALL

NOTES

THE ENGINEER HAS UNDERTAKEN LIMITED FIELD VERIFICATION OF THE LOCATION, DEPTH, SIZE, OR TYPE OF EXISTING UNDERGROUND UTILITY LINES. MAKES NO REPRESENTATION PERTAINING THERETO AND ASSUMES NO RESPONSIBILITY OR LIABILITY THEREFOR. THE CONTRACTOR SHALL INFORM ITSELF OF THE LOCATION OF ANY UTILITY LINE IN OR NEAR THE AREA OF THE WORK IN ADVANCE OF AND DURING EXCAVATION WORK. THE CONTRACTOR IS FULLY RESPONSIBLE FOR ANY AND ALL DAMAGE CAUSED BY ITS FAILURE TO LOCATE, IDENTIFY, AND PRESERVE ANY AND ALL EXISTING UTILITIES. THE CONTRACTOR SHALL COMPLY WITH STATE STATUTES, MUNICIPAL AND LOCAL ORDINANCES, RULES AND REGULATIONS PERTAINING TO THE LOCATION OF LINES AND FACILITIES IN PLANNING AND CONDUCTING EXCAVATION, WHETHER BY CALLING OR NOTIFYING THE UTILITIES, COMPLYING WITH "BLUE STAKES" PROCEDURES, OR OTHERWISE.

THESE DRAWINGS DO NOT INCLUDE NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY WHICH SHALL REMAIN THE RESPONSIBILITY OF THE CONTRACTOR.

THIS DOCUMENT, AND THE IDEAS AND DESIGNS INCORPORATED HEREIN, ARE INTENDED FOR USE ON THIS PROJECT AND IS NOT TO BE USED, IN WHOLE OR IN PART, FOR ANY OTHER PROJECT WITHOUT THE WRITTEN AUTHORIZATION OF GND ENGINEERING, LLC IN THE EVENT OF UNAUTHORIZED USE, THE USER ASSUMES ALL RESPONSIBILITY AND LIABILITY WHICH RESULTS.

GENERAL NOTES:

- ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED UNDER THIS CONTRACT SHALL, EXCEPT AS OTHERWISE STATED OR PROVIDED HEREIN, BE CONSTRUCTED IN ACCORDANCE WITH THE CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 1986 EDITION, UPDATE NO 8.
 - THE EROSION PROTECTION SPECIFIED ON THIS PLAN IS THE MINIMUM RECOMMENDED. THE OWNER IS ENCOURAGED TO INCORPORATE EROSION RESISTANT LANDSCAPING ON AREAS WHERE EROSION MAY OCCUR SUCH AS SLOPES AND SWALES. THE OWNER IS RESPONSIBLE FOR THE INSTALLATION AND MAINTENANCE OF ALL EROSION CONTROL FEATURES NECESSARY TO PRESERVE THE DESIGN INTENT OF THE GRADING PLAN.
 - THE DRAINAGE INFRASTRUCTURE SHOWN ON THIS PLAN IS THE RESPONSIBILITY OF THE PROPERTY OWNER.
 - ALL DISTURBED AREAS OUTSIDE THE BUILDING PAD MUST BE RESEDED OR LANDSCAPED
 - TWO (2) WORKING DAYS PRIOR TO ANY EXCAVATION, CONTRACTOR MUST CONTACT LINE LOCATING SERVICE, (260-1990) FOR LOCATION OF EXISTING UTILITIES.
 - PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE AND VERIFY THE HORIZONTAL AND VERTICAL LOCATIONS OF ALL OBSTRUCTIONS AND EXISTING PAVEMENT. SHOULD A CONFLICT EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER OR SURVEYOR SO THAT THE CONFLICT CAN BE RESOLVED WITH A MINIMUM OF DELAY.
- EROSION CONTROL NOTES**
- CONTRACTOR IS RESPONSIBLE FOR OBTAINING A TOPSOIL DISTURBANCE PERMIT PRIOR TO BEGINNING WORK.
 - CONTRACTOR IS RESPONSIBLE FOR MAINTAINING RUN-OFF ON SITE DURING CONSTRUCTION.
 - CONTRACTOR IS RESPONSIBLE FOR CLEANING ALL SEDIMENT THAT GETS INTO EXISTING RIGHT-OF-WAY.
 - REPAIR OF DAMAGED FACILITIES AND CLEANUP OF SEDIMENT ACCUMULATIONS ON ADJACENT PROPERTIES AND IN PUBLIC FACILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR.
 - ALL EXPOSED EARTH SURFACES MUST BE PROTECTED FROM WIND AND WATER EROSION PRIOR TO FINAL (CITY) ACCEPTANCE OF ANY PROJECT.

THE Group

300 Branding Iron Rd. SE
Rio Rancho, New Mexico 87124
Phone: (505) 514-0995

CITY OF ALBUQUERQUE PUBLIC WORKS DEPARTMENT ENGINEERING DEVELOPMENT GROUP OAKLAND HEIGHTS SUBDIVISION BEING A REPLAT OF LOT 12, BLOCK 3, UNIT 2, TRACT 2, NAA GRADING & DRAINAGE PLAN	
DESIGN REVIEW COMMITTEE	CITY ENGINEER APPROVAL
LAST DESIGN UPDATE	Mo./DAY/YR.
CITY PROJECT No.	ZONE MAP No.
1009843	C-19-Z
SHEET	OF
1	1