


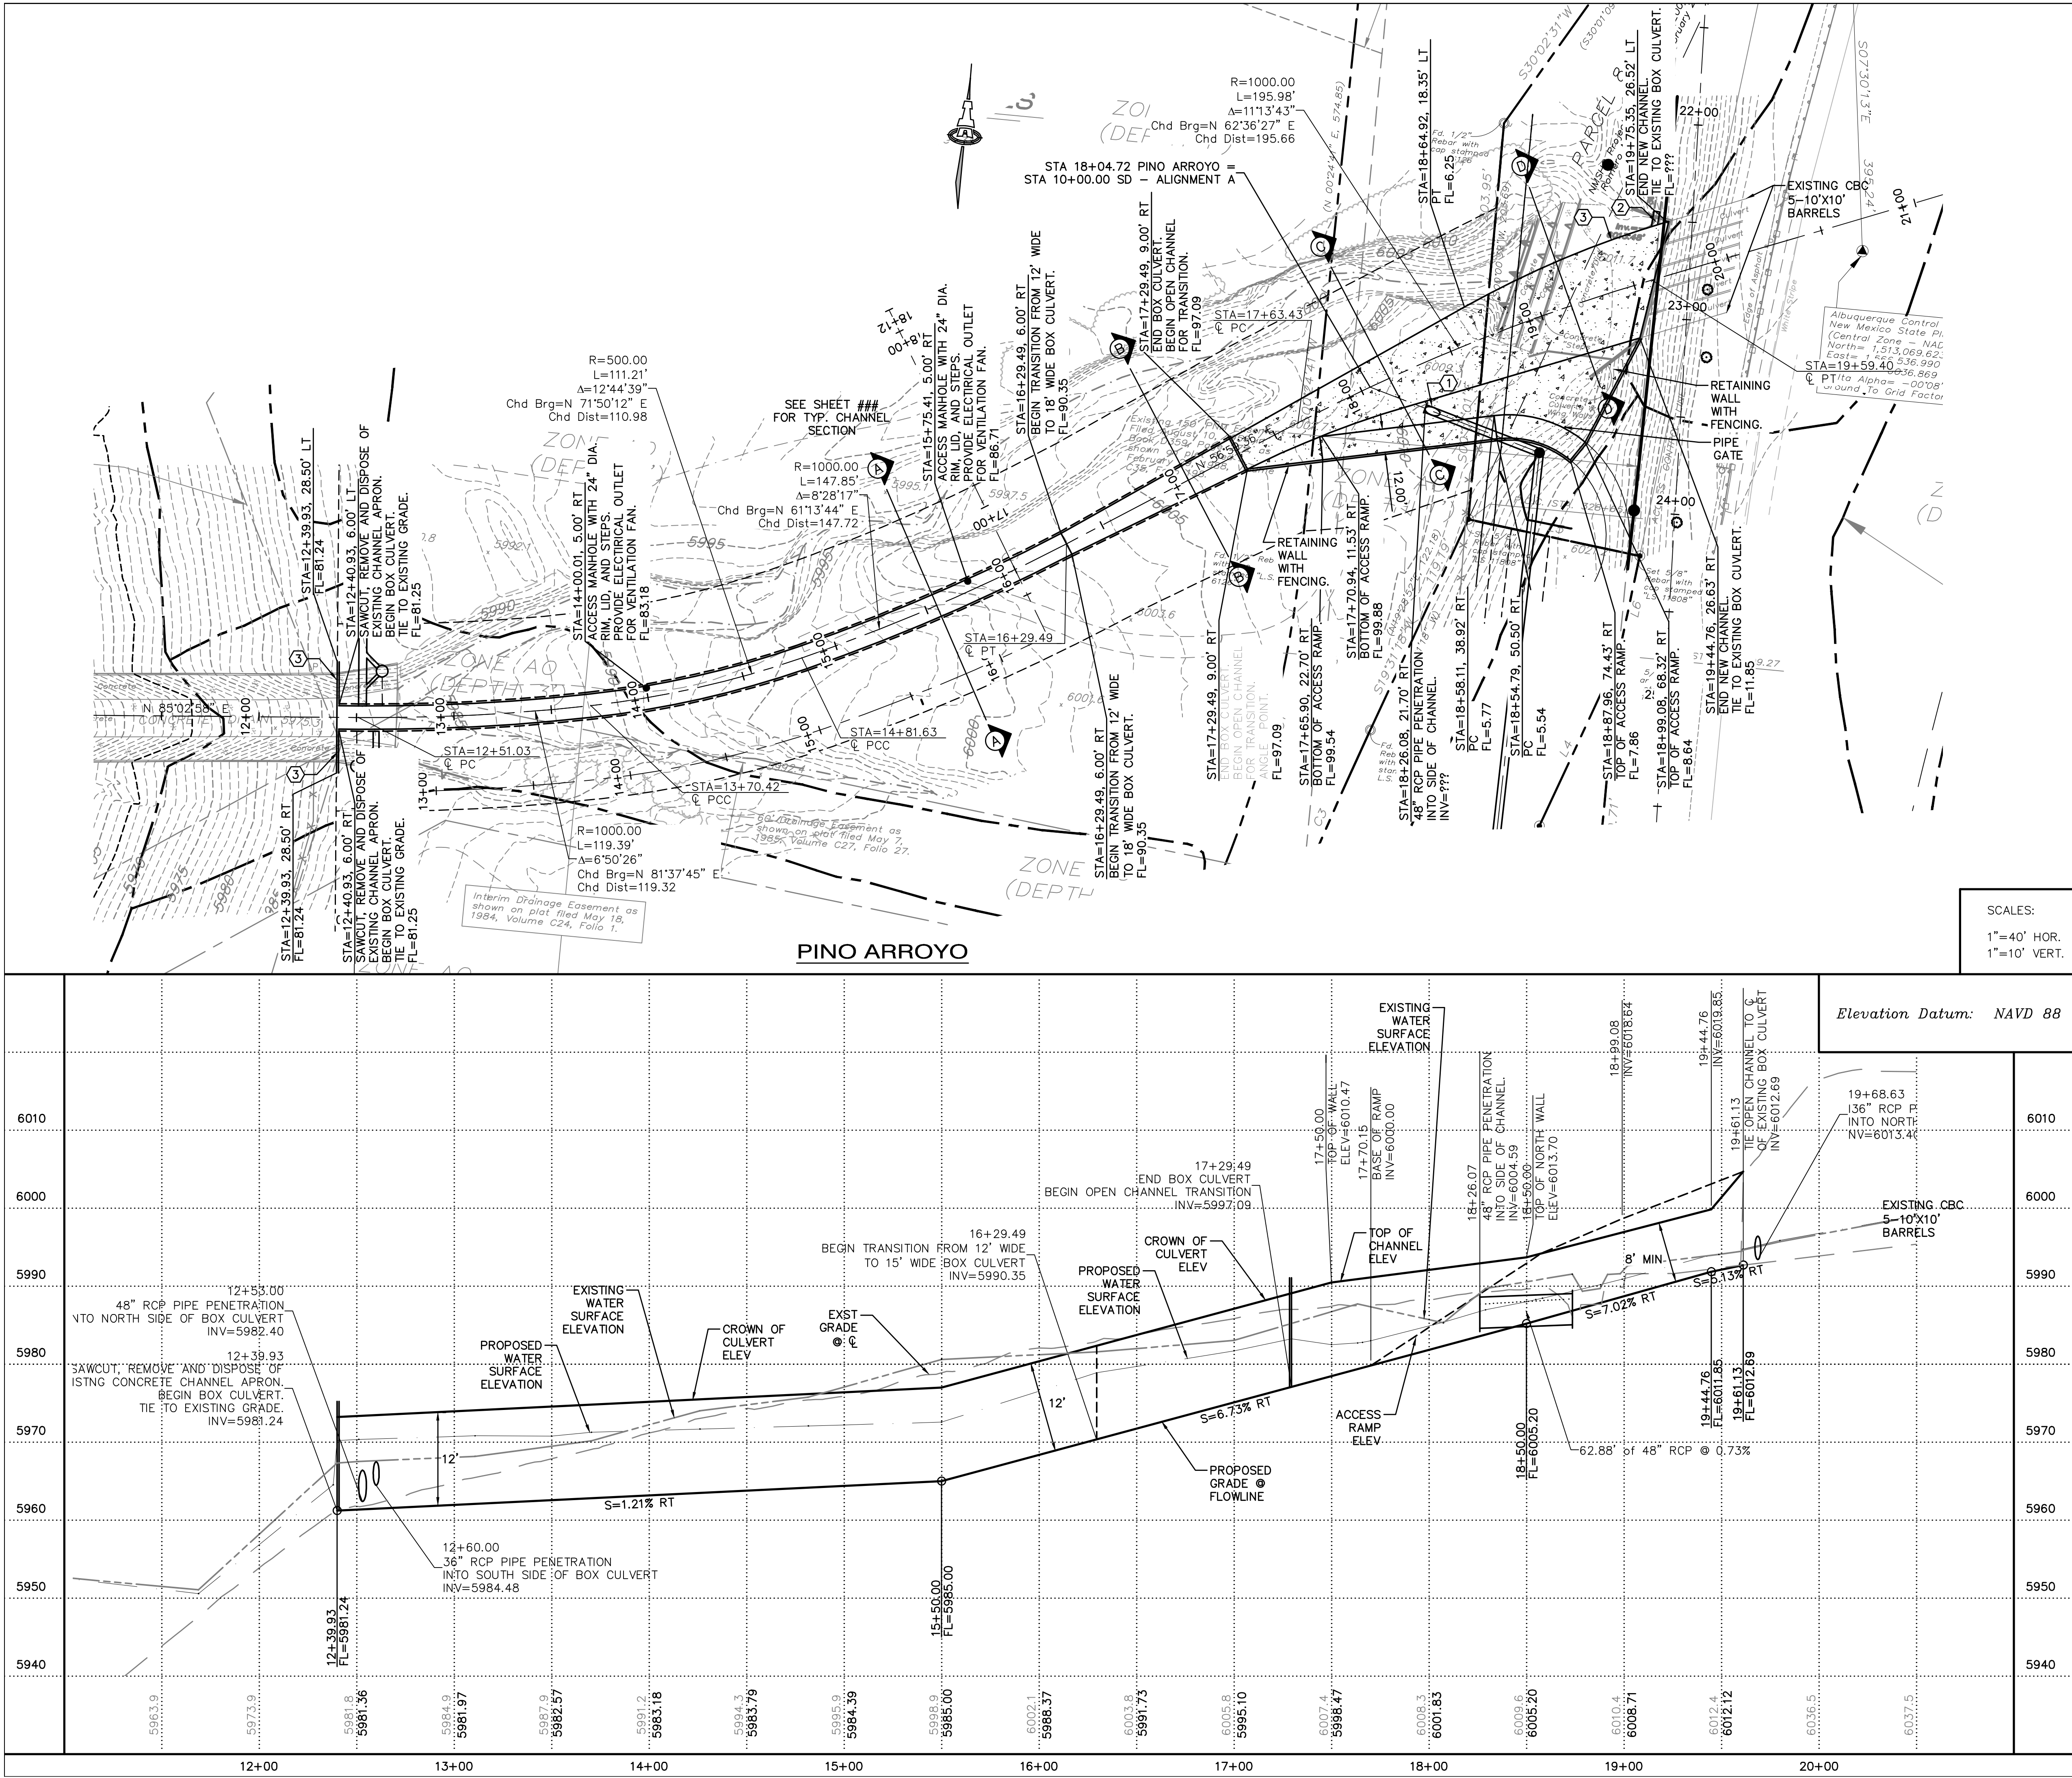

GENERAL NOTES

- BURIED BOX CULVERT WILL BE PROTECTED WITH WATERPROOFING PER DETAIL ON SHEET XXXX.
- WATERPROOF LIGHTING SHALL BE PROVIDED AT CROWN OF BOX CULVERT AT XXX' O.C. SEE DETAIL ON SHEET XXXX.
-

KEYED NOTES

- 48" RCP PENETRATION INTO CHANNEL SIDE SLOPE PER AMAFCA STD DWG #104.
- EXTEND 36" RCP TO WALL FACE PER AMAFCA STD DWG #105.
- RETAINING WALL WITH FENCE ON TOP.

SPECIAL NOTES FOR WORK IN AMAFCA EASEMENT

- AMAFCA Field Engineer shall be notified 48-hours prior to any work within the AMAFCA R/W. Tel 884-2215.
- No work will be performed in the AMAFCA R/W between May 15 and October 15 without written permission from AMAFCA.
- All subgrade, backfill and embankment shall be compacted to 95% (modified proctor) within the AMAFCA R/W. Testing reports shall be provided to AMAFCA Field Engineer.
- AMAFCA Field Engineer Will be notified 48-hours prior to final inspection of any facilities within the AMAFCA R/W.
- All disturbed ground areas shall be revegetated in accordance with City of Albuquerque Standard Specifications for Public Works Construction. Section 1012 Native Grass Seeding, as currently updated.

ISAACSON & ARFMAN, P.A.
Consulting Engineering Associates
128 Monroe Street N.E.
Albuquerque, New Mexico 87108
Ph. 505-268-8828 www.iacivil.com
1883 CP-301.dwg Feb 24, 2015

CITY OF ALBUQUERQUE
PUBLIC WORKS DEPARTMENT
ENGINEERING GROUP

TITLE:
**THE FOOTHILLS
PINO ARROYO STA 10+00 - END**
CONCEPTUAL PLAN AND PROFILE

Design Review Committee	City Engineer Approval	Last Design Update	Mo./Day/Yr.	

City Project No.	Zone Map No.	Sheet	Of
	E-22-Z	2	

AS-BUILT INFORMATION		BENCH MARKS		SURVEY INFORMATION		ENGINEER'S SEAL	
CONTRACTOR		CITY OF ALBUQUERQUE	"3-E23"	FIELD NOTES			
WORK STATED BY		ELEVATION: 6009.561 NAVD88.					
DATE							
ACCEPTANCE BY							
DATE							
DRAWINGS BY							
DATE							
CORRECTED BY							
DATE							
RECORDED BY							
DATE							
NO.							