


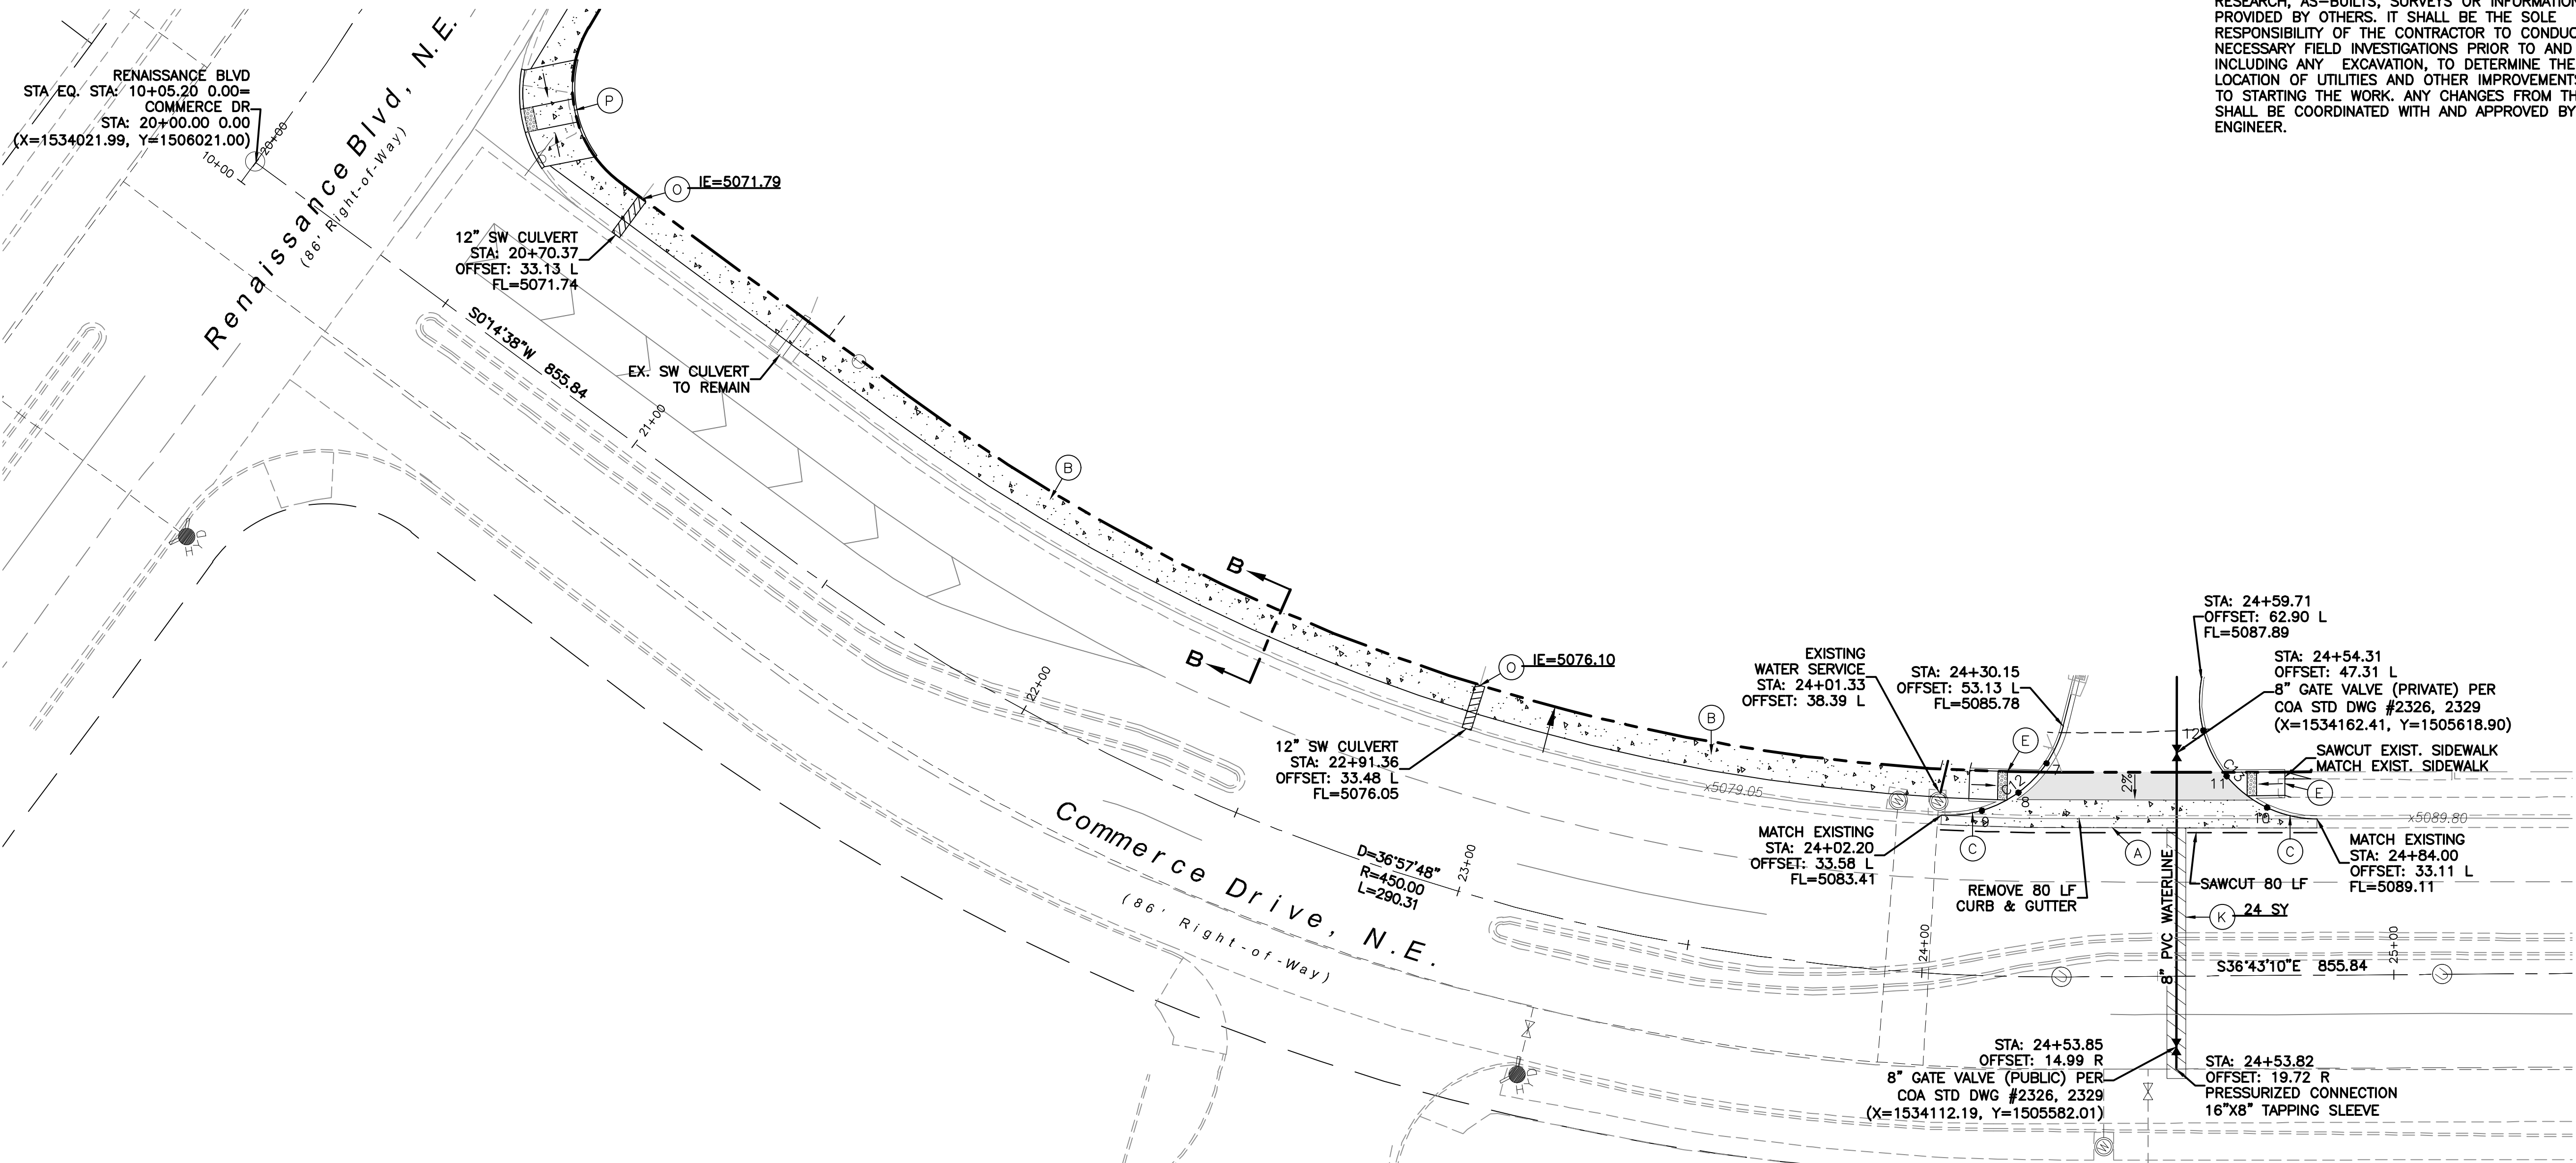

KEYED NOTE:

- (A) 6' VALLEY GUTTER PER COA STD DWG #2420
- (B) 6' SIDEWALK PER COA STD DWG #2430 (2% MAX. CROSS SLOPE)
- (C) STANDARD CURB & GUTTER PER COA STD DWG #2415A
- (D) MEDIAN CURB & GUTTER PER COA STD DWG #2415B
- (E) ACCESSIBLE RAMP W/ TRUNCATED DOMES PER DETAIL SHEET 8
- (F) 4" SOLID WHITE STRIPE, THERMOPLASTIC
- (G) REMOVE & DISPOSE EXIST. 8" PCC CURB
- (H) REMOVE & DISPOSE EXIST. ASPHALT CURB
- (I) REMOVE & RELOCATE POLE & LAMP BY PNM
- (J) MEDIAN CONCRETE PER COA STD DWG #2408 & #2502. MATCH EXIST. MEDIAN COLOR
- (K) REMOVE & REPLACE EXIST. ASPHALT PER COA STD DWG #2465 - ARTERIAL
- (L) CONCRETE PAVERS PER COA STD DWG #2412
- (M) ADJUST EXIST. MANHOLE TO GRADE
- (N) ADJUST EXIST. VALVE TO GRADE
- (O) 12" SIDEWALK CULVERT WITH STEEL PLATE PER COA STD DWG #2236. SEE PIPE TO CULVERT CONNECTION DETAIL, SHEET 5. TACK WELD PLATE TO BOLTS.
- (P) ACCESSIBLE RAMP W/ TRUNCATED DOMES PER COA STD DWG #2441
- (Q) REMOVE AND REPLACE EXISTING PAVEMENT 1-FOOT BEYOND PROPOSED MEDIAN CURB PER COA STD DWG #2465 - ARTERIAL

LEGEND


- CURB & GUTTER
- BOUNDARY LINE
- EASEMENT
- CENTERLINE
- SIDEWALK
- EXISTING CURB & GUTTER
- EXISTING BOUNDARY LINE
- PROPOSED CONCRETE GUTTER
- EXISTING ASPHALT TO BE REMOVED
- EXISTING MEDIAN TO BE REMOVED
- PROPOSED ASPHALT
- MEDIAN CONCRETE
- SAWCUT

QUARTER POINTS


| C12 | FL      | ELEV. | C13 | FL      | ELEV. |
|-----|---------|-------|-----|---------|-------|
| 7   | 5085.08 |       | 10  | 5088.03 |       |
| 8   | 5084.32 |       | 11  | 5087.70 |       |
| 9   | 5083.64 |       | 12  | 5087.98 |       |

CURVE TABLE

| CURVE | DELTA      | RADIUS | LENGTH |
|-------|------------|--------|--------|
| C12   | 79°23'16"  | 25.00  | 34.64  |
| C13   | 100°29'08" | 25.00  | 43.85  |

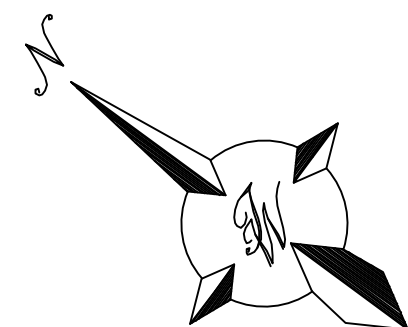

GRAPHIC SCALE

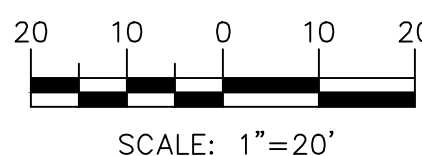

**CAUTION:**  
ALL EXISTING UTILITIES SHOWN WERE OBTAINED FROM RESEARCH, AS-BUILTS, SURVEYS OR INFORMATION PROVIDED BY OTHERS. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO CONDUCT ALL NECESSARY FIELD INVESTIGATIONS PRIOR TO AND INCLUDING ANY EXCAVATION, TO DETERMINE THE ACTUAL LOCATION OF UTILITIES AND OTHER IMPROVEMENTS, PRIOR TO STARTING THE WORK. ANY CHANGES FROM THIS PLAN SHALL BE COORDINATED WITH AND APPROVED BY THE ENGINEER.

|                                                                                                                        |                        |
|------------------------------------------------------------------------------------------------------------------------|------------------------|
| <br>5571 MIDWAY PARK PLACE NE<br>ALBUQUERQUE, NM 87109<br>(505)858-3100<br>www.tierrawestllc.com                       |                        |
| CITY OF ALBUQUERQUE<br>PUBLIC WORKS DEPARTMENT<br>ENGINEERING GROUP                                                    |                        |
| TITLE: <b>SPANISH TRAILS REHABILITATION SUITES</b><br>PAVING & UTILITY IMPROVEMENTS<br>1610 RENAISSANCE BLVD, NE 87106 |                        |
| DESIGN REVIEW COMMITTEE                                                                                                | CITY ENGINEER APPROVAL |
| LAST DESIGN UPDATE                                                                                                     |                        |
| MO./DAY/YR.                                                                                                            |                        |
| MO./DAY/YR.                                                                                                            |                        |
| MO./DAY/YR.                                                                                                            |                        |
| MO./DAY/YR.                                                                                                            |                        |
| MO./DAY/YR.                                                                                                            |                        |
| MO./DAY/YR.                                                                                                            |                        |
| CITY PROJECT NO.                                                                                                       | 586271                 |
| ZONE MAP NO.                                                                                                           | F-16-Z                 |
| SHEET                                                                                                                  | 6 OF 10                |