



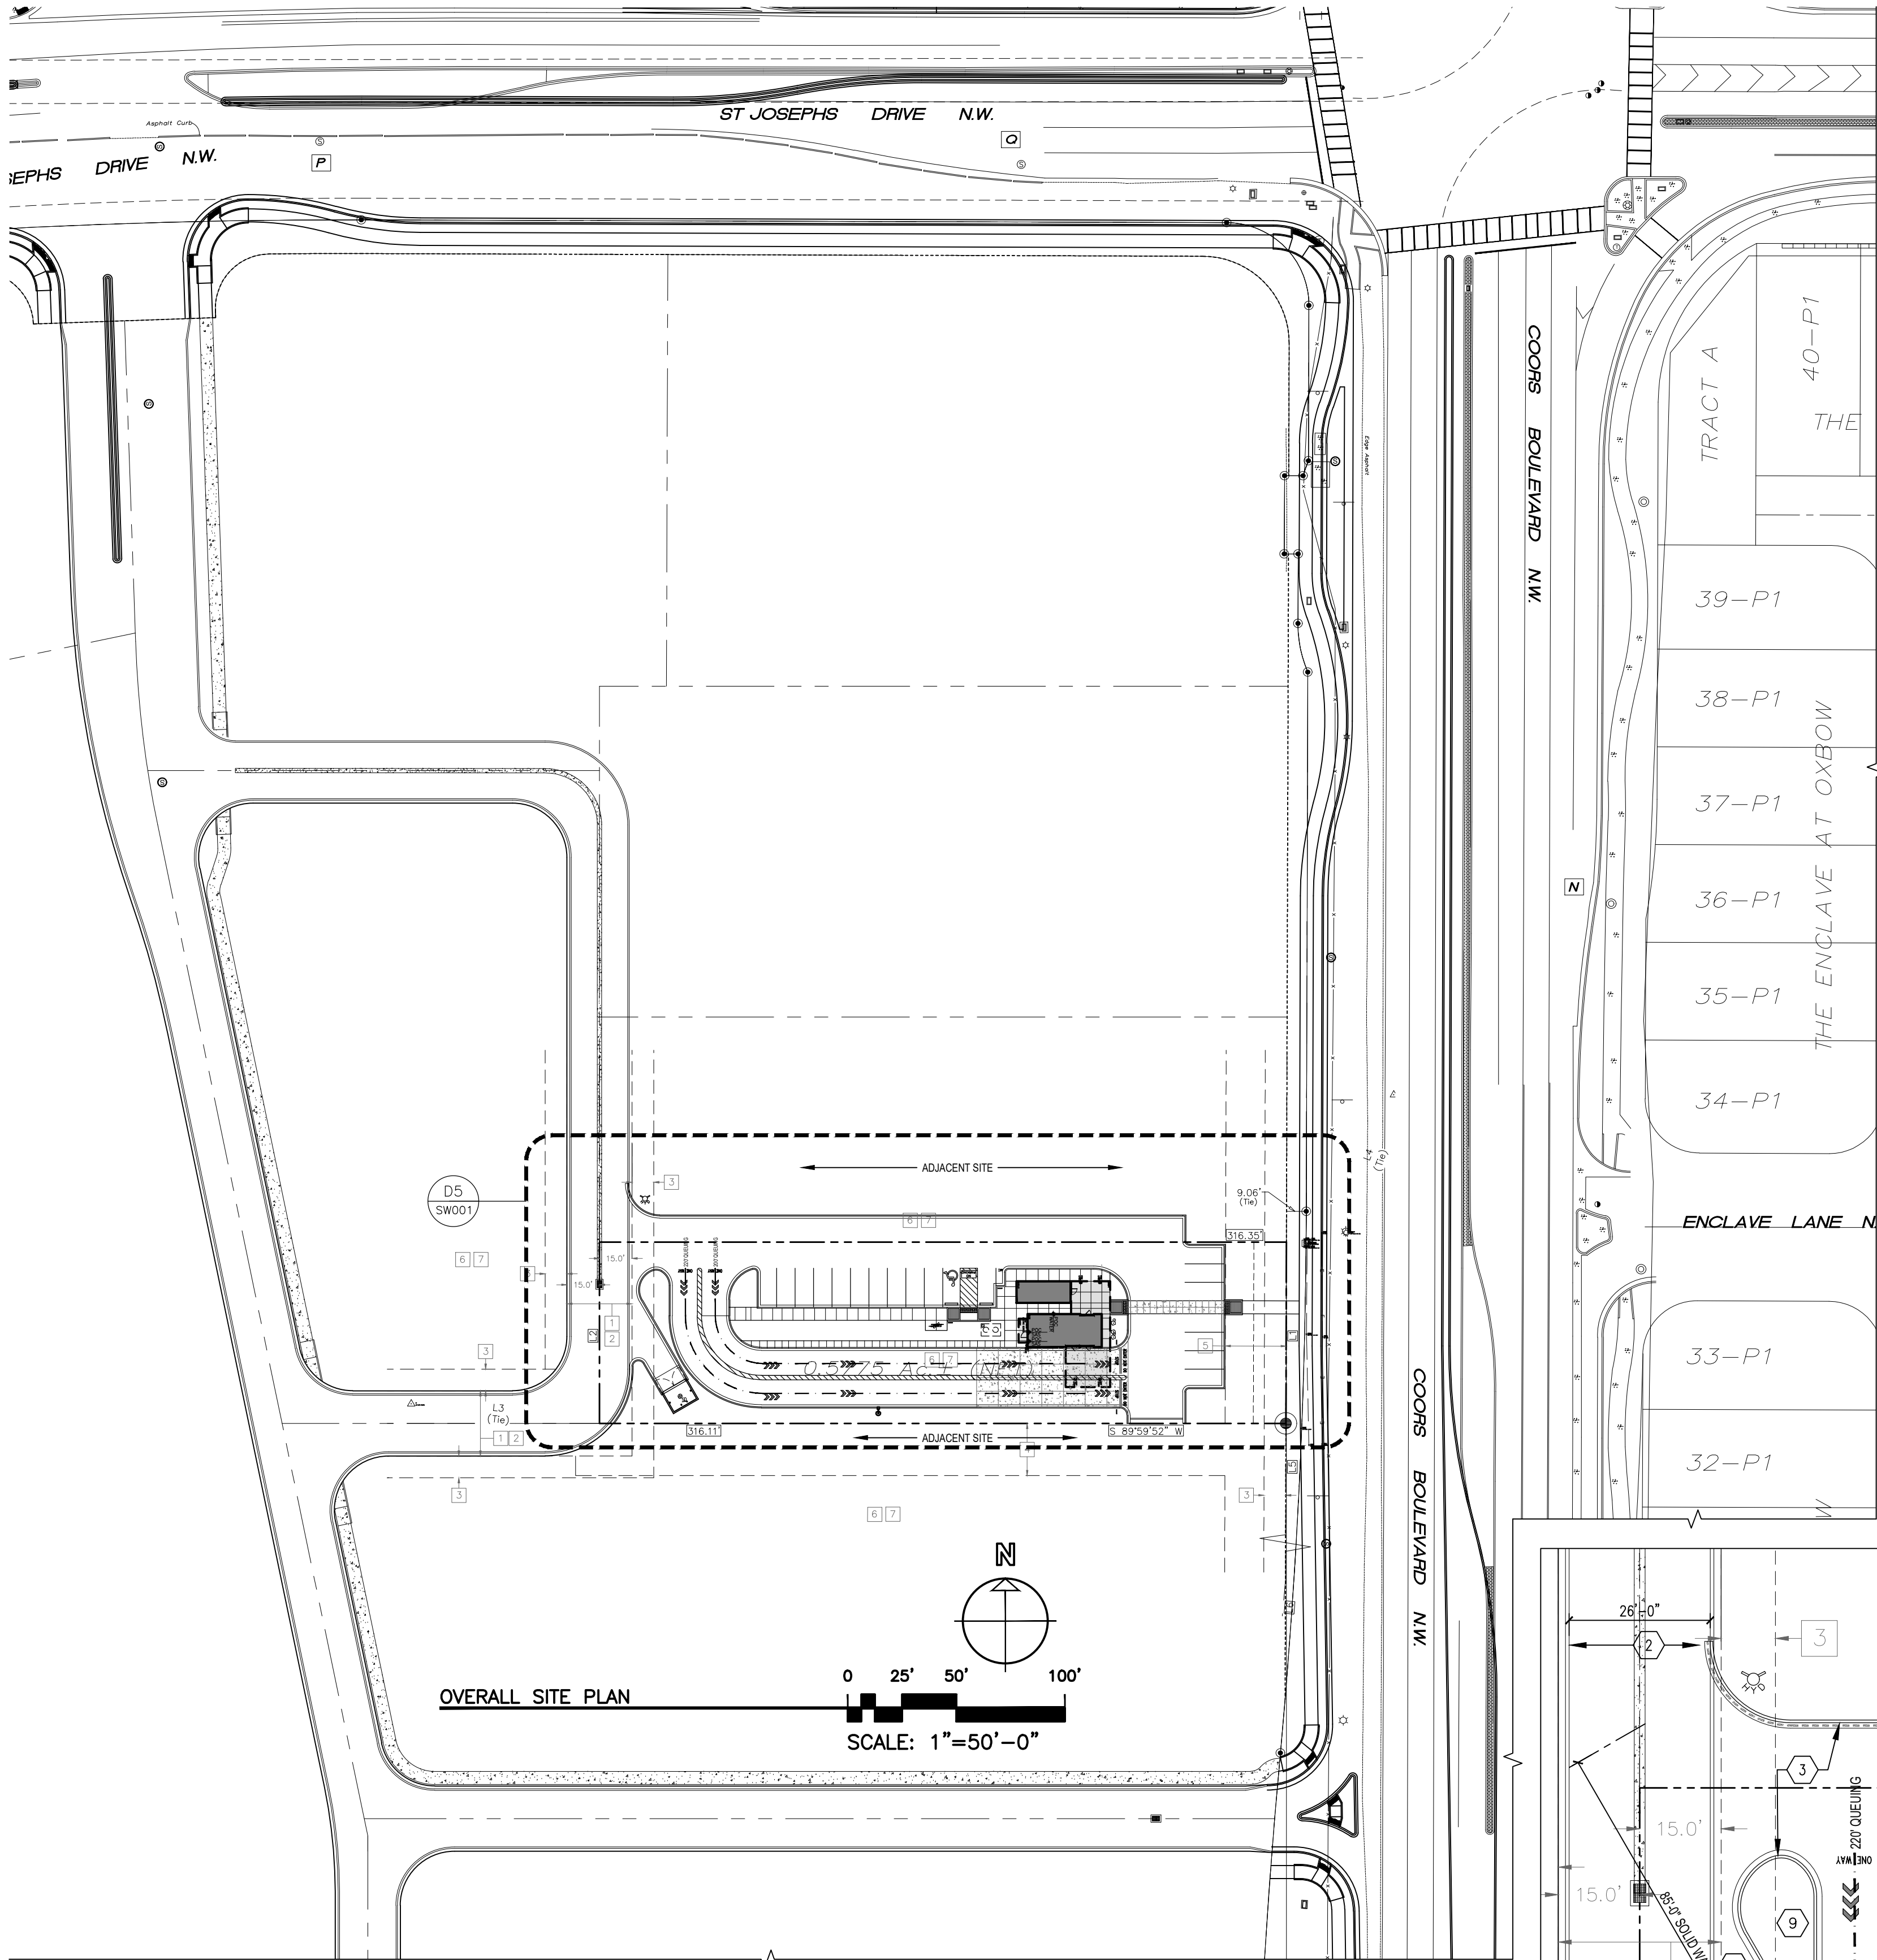



Approved for access by the Solid Waste Department.
All containers must be made accessible for pick up
between the hours of 5AM and 8PM.
Reviewer: Herman Gallagos
Date: 02-16-24
****Recycle Declined****

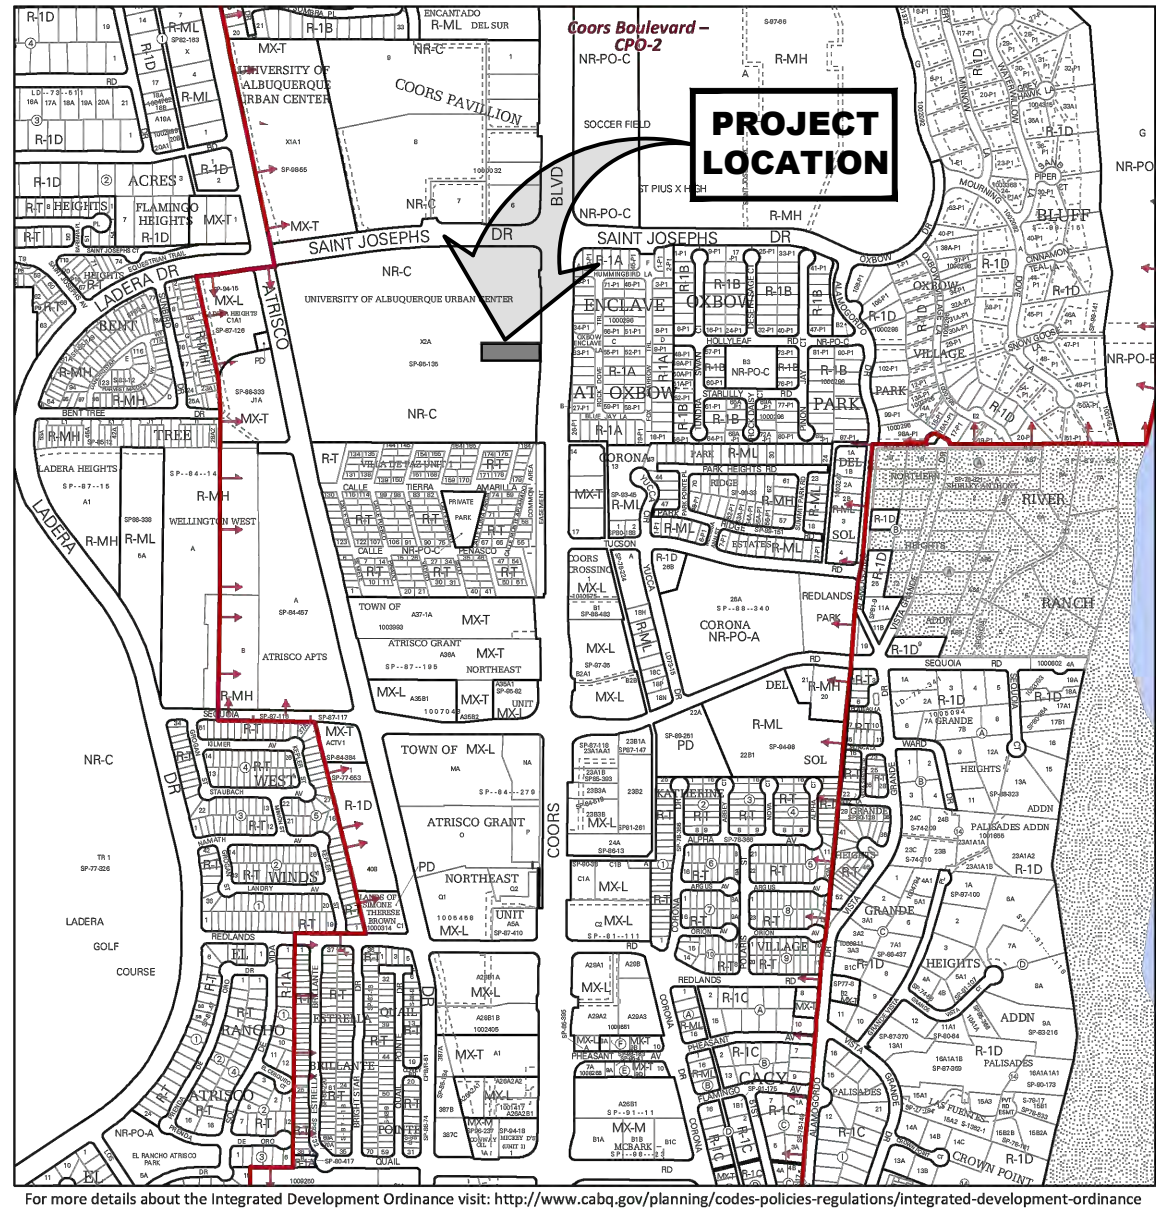


SITE LEGEND	
SYN	SIGN
☆	LIGHT POLE (2" DIA BASE)
⊗	BOLLARD
WV	WATER VALVE
⊕	WATER LINE
⊗	SAS MANHOLE
⊕	UNDERGROUND POWER LINE
⊗	TELEPHONE MANHOLE
⊕	GAS LINE
⊗	WATER METER
⊕	SAS LINE
⊗	POWER POLE
⊕	OVERHEAD POWER LINE

SITE PLAN KEYED NOTES

1. SINGLE UNIT DUMPSTER ENCLOSURE WITH AREA DRAIN TO GREASE INTERCEPTOR
2. SHARED ACCESS EASEMENT
3. CURB, 6" HIGH CONCRETE AND GUTTER REFER TO SIDEWALK
4. CURB, 6" HIGH CONCRETE AND GUTTER REFER TO SIDEWALK
5. CONCRETE SIDEWALK, WIDTH AS NOTED
6. 4" WIDE PAINTED PARKING STALL STRIPING, TYP. COLOR: WHITE
7. TYP. ACCESSIBLE PARKING SPACE W/ LOADING ZONE
8. PRECAST CONCRETE WHEEL STOP AT HG STALLS & AS NOTED
9. LANDSCAPE AREA, REFER TO LANDSCAPE PLAN
10. ACCESSIBLE CURB RAMP
11. 6" WIDE PAINTED RED FIRE LANE MARK AS 'NO PARKING - FIRE LANE' EVERY 15' WITH WHITE BLOCK CAPITAL LETTERS MIN. 5" IN HEIGHT AND 3/4" WIDE (-----) ON PAVING OR FACE OF CURB AT CURB LOCATIONS, REFER FIRE-1 PLAN
12. NEW ASPHALTIC PAVING FOR HEAVY DUTY OVER PREPARED SUBGRADE (AS SITE CONDITIONS REQUIRE-VERIFY WITH GEOTECHNICAL ENGINEER) PER GEOTECHNICAL REPORT.
13. NEW ASPHALTIC PAVING FOR STANDARD DUTY OVER PREPARED SUBGRADE (AS SITE CONDITIONS REQUIRE-VERIFY WITH GEOTECHNICAL ENGINEER) PER GEOTECHNICAL REPORT.
14. MONUMENT SIGN
15. CONCRETE APRON PER COA SOLID WASTE STANDARDS
16. SLOPE APPROACH TO ENCLOSURE AT .125:12

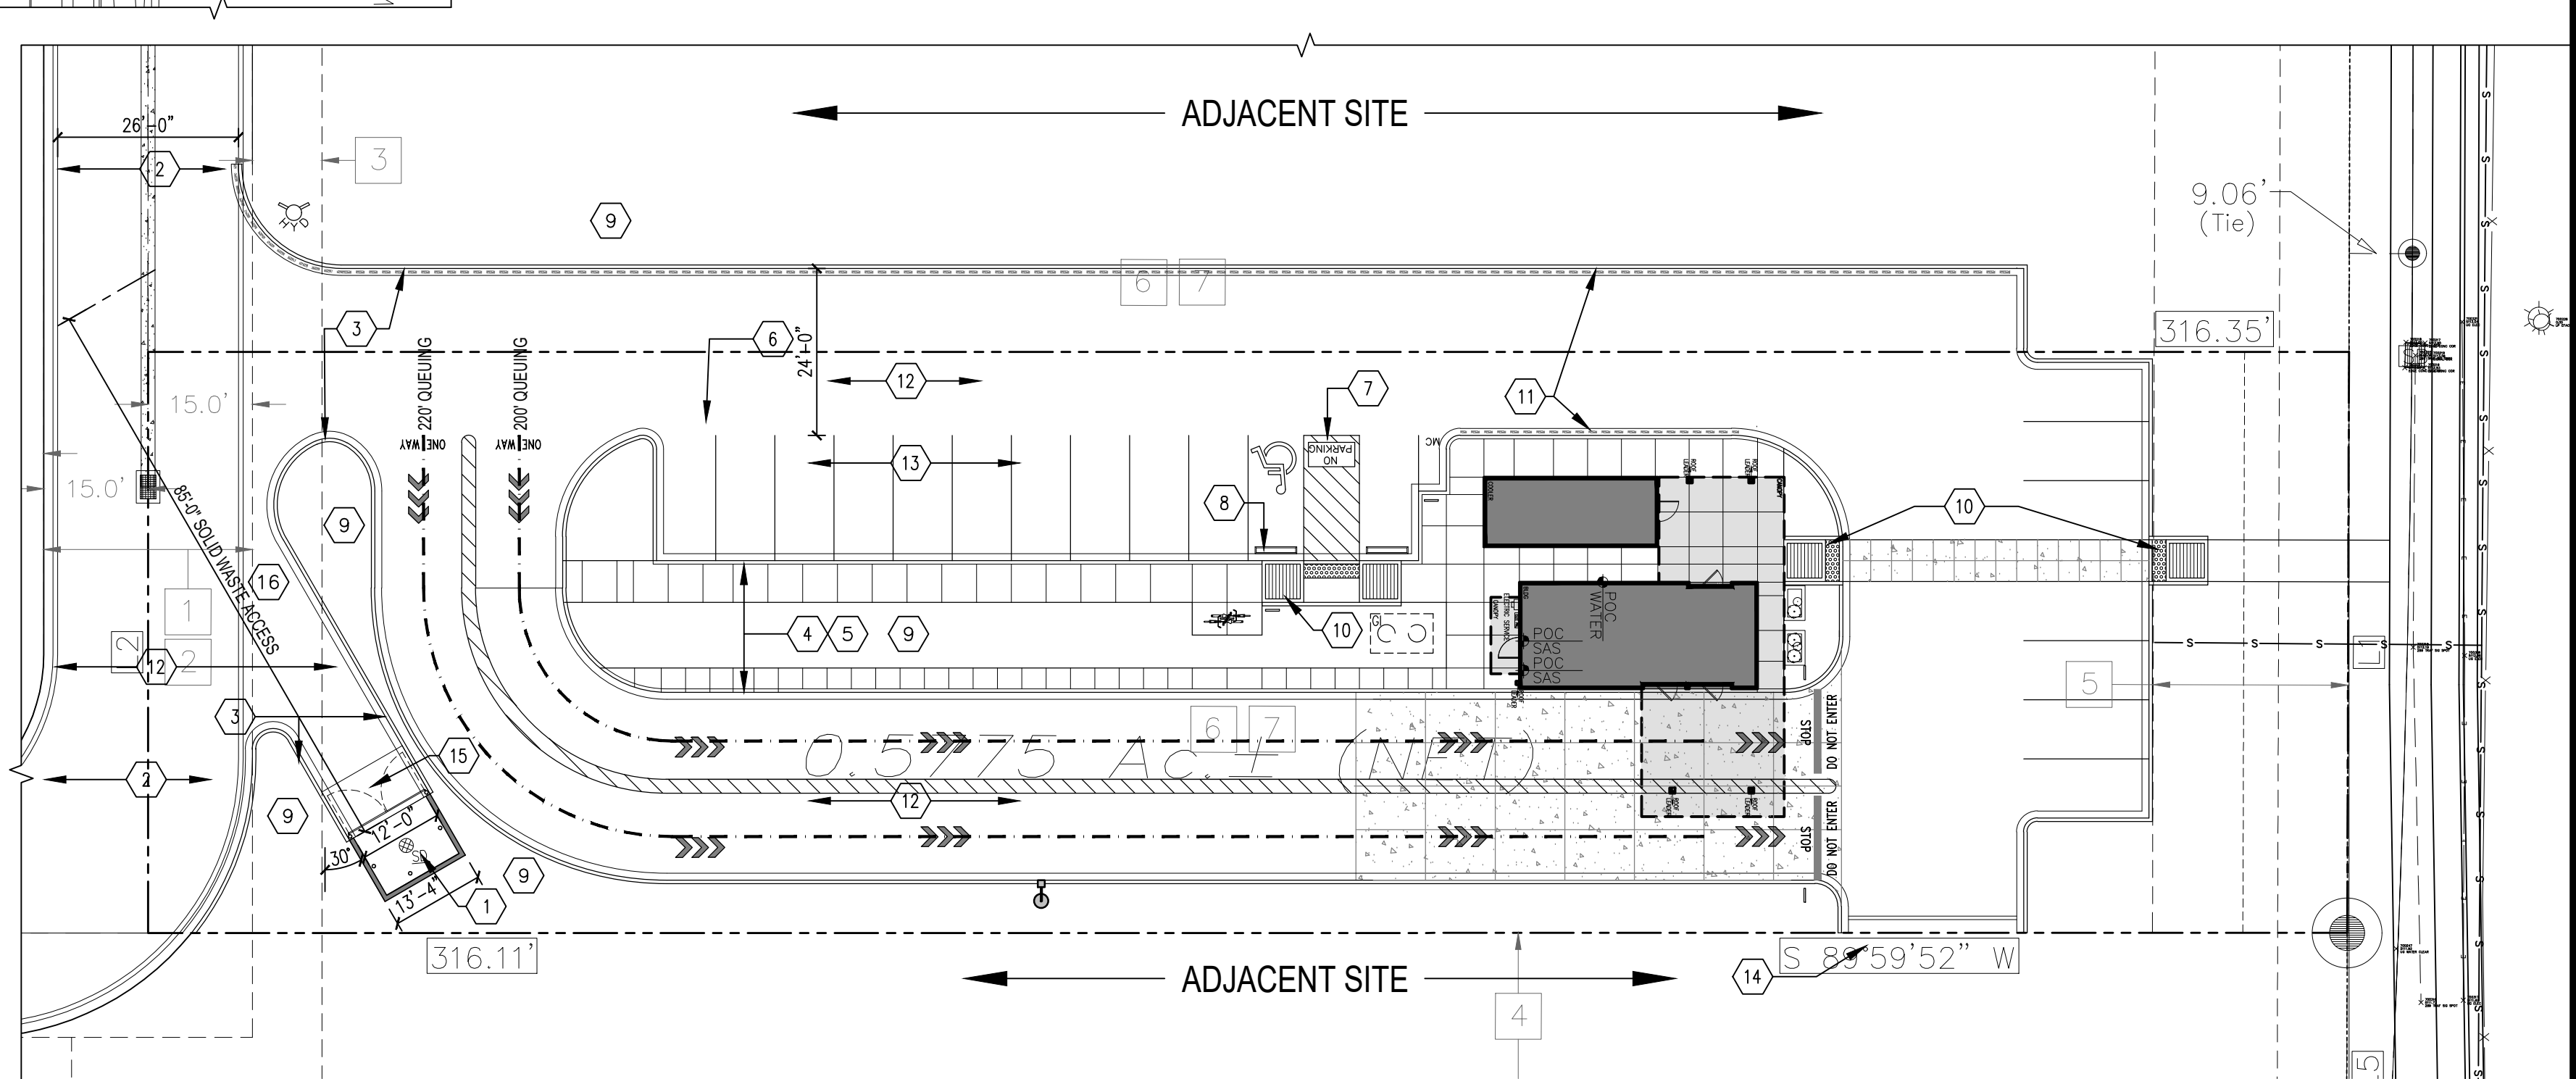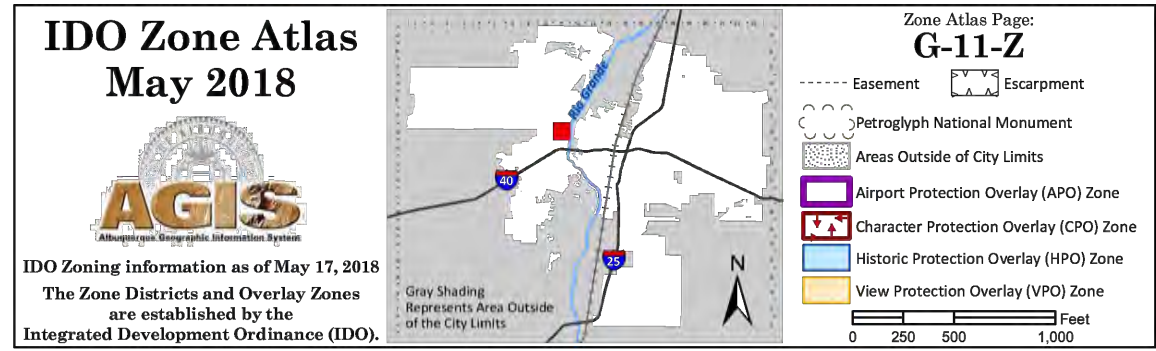

D5 SITE PLAN

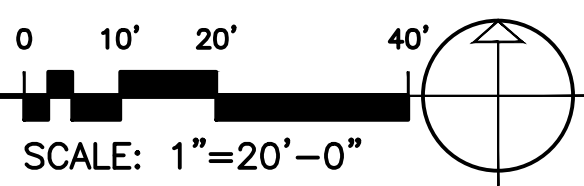

SOLID WASTE DEPARTMENT APPROVAL PLAN - NOT FOR CONSTRUCTION
(CONTRACTOR NOTE: ELEMENTS OF THIS DRAWING ARE INCORPORATED IN SITE PLAN A001 WHICH IS TO BE USED FOR CONSTRUCTION)