
National Pollutant Discharge Elimination System Manual

National Pollutant Discharge Elimination System Manual Revision 0 Appendix A2 – Structural Controls November 2002



Section 1: Erosion & Sediment Control – Construction Activities

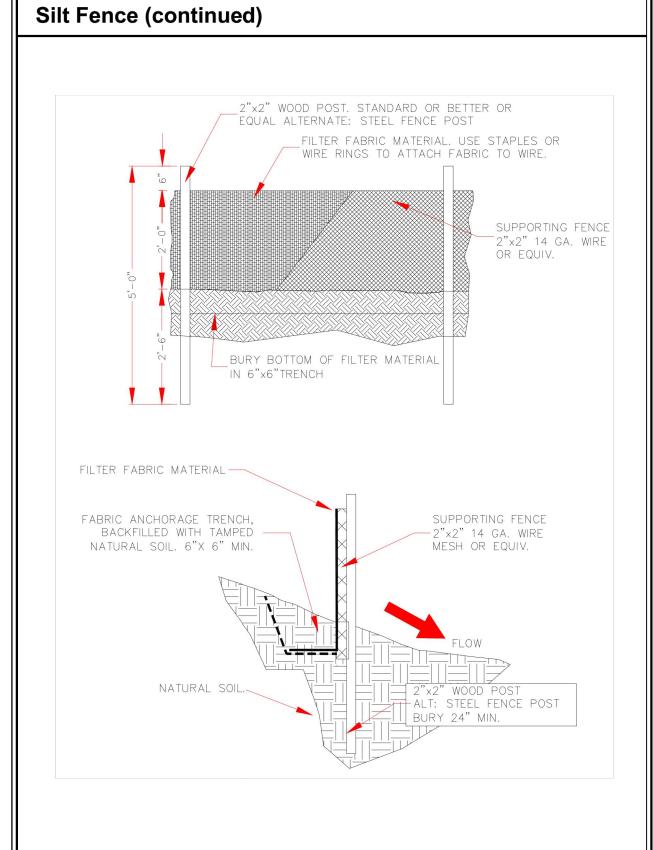

## **SWPPP Cut Sheet:** Filtrexx® Sediment Control

Sediment & Perimeter Control Technology

**PURPOSE & DESCRIPTION** 

Filtrexx® Sediment control is a three-dimensional tubular sediment control and storm water runoff filtration device typically used for **perimeter control** of sediment and other soluble pollutants (such as phosphorus and petroleum hydrocarbons), on and around construction activities.

Filtrexx® Sediment control is to be installed down slope of any disturbed area requiring erosion and sediment control and filtration of soluble pollutants from runoff. Sediment control is effective when

- installed perpendicular to sheet or low concentrated flow. Acceptable applications include: Site perimeters Above and below disturbed areas subject to sheet
- runoff, interrill and rill erosion Above and below exposed and erodable slopes
- Around area drains or inlets located in a 'sump' On compacted soils where trenching of silt fence is difficult or impossible Around sensitive trees where trenching of silt
- unnecessarily disturb established vegetation. On frozen ground where trenching of silt fence is

fence is not beneficial for tree survival or may

 On paved surfaces where trenching of silt fence is impossible.

## INSTALLATION

let nature do it.™

- 1. Sediment control used for perimeter control of sediment and soluble pollutants in storm runoff shall meet Filtrexx® Soxx™ Material Specifications
- and use Certified Filtrexx® FilterMedia™. 2. Contractor is required to be Filtrexx<sup>®</sup> Certified<sup>™</sup> as determined by Filtrexx® International, LLC

(440-926-2607 or visit website at www.filtrexx. com). Certification shall be considered current if appropriate identification is shown during time of bid or at time of application (current listing can be found at www.filtrexx.com). Look for the Filtrexx® Certified<sup>TM</sup> Seal.

- 3. Sediment control will be placed at locations
- indicated on plans as directed by the Engineer. 4. Sediment control should be installed parallel to the base of the slope or other disturbed area. In extreme conditions (i.e., 2:1 slopes), a second Sediment control shall be constructed at the top of the slope.
- 5. Effective Soxx<sup>™</sup> height in the field should be as follows: 8" Diameter Sediment control = 6.5" high, 12" Diameter Sediment control = 9.5" high, 18" Diameter SiltSoxx<sup>™</sup> = 14.5" high, 24" Diameter Sediment control = 19" high.
- **6.** Stakes shall be installed through the middle of the Sediment control on 10 ft (3m) centers, using 2 in (50mm) by 2 in (50mm) by 3 ft (1m) hard wood stakes. In the event staking is not possible, i.e., when Sediment control is used on pavement, heavy concrete blocks shall be used behind the Sediment control to help stabilize during rainfall/runoff events.
- 7. Staking depth for sand and silt loam soils shall be 12 in (300mm), and 8 in (200mm) for clay soils.
- 8. Loose compost may be backfilled along the upslope side of the Sediment control, filling the seam between the soil surface and the device, improving filtration and sediment retention.
- **9.** If the Sediment control is to be left as a permanent filter or part of the natural landscape, it may be seeded at time of installation for establishment of permanent vegetation. The Engineer will specify seed requirements.

Construction Activities | Section 1: Erosion & Sediment Control | 323

A2-42

when accumulation has reached 1/2 of the effective height of the Sediment control, or See design drawing schematic for correct Filtrexx® as directed by the Engineer. Alternatively, a Sediment control installation (Figure 1.1). new Sediment control can be placed on top of Routine inspection should be conducted within

and slightly behind the original one creating more sediment storage capacity without soil 4. Sediment control shall be maintained until disturbed area above the device has been

**3.** The Contractor shall remove sediment at the

base of the upslope side of the Sediment control

- permanently stabilized and construction activity has ceased. 5. The FilterMedia™ will be dispersed on site once disturbed area has been permanently stabilized, construction activity has ceased, or as determined
- by the Engineer. **6.** For long-term sediment and pollution control applications, Sediment control can be seeded at the time of installation to create a vegetative filtering system for prolonged and increased filtration of sediment and soluble pollutants 2. If the Sediment control has been damaged, it shall (contained vegetative filter strip). The appropriate seed mix shall be determined by the Engineer.

| Slope Percent | Maximum Slope Length Above Sediment Control in Feet (meters)* |                                    |                                    |                                   |                                   |
|---------------|---|------------------------------------|------------------------------------|-----------------------------------|-----------------------------------|
|               | 8 in (200 mm) Sediment<br>control                             | 12 in (300 mm)<br>Sediment control | 18 in (450 mm)<br>Sediment control | 24 in (600mm)<br>Sediment control | 32 in (800mm)<br>Sediment control |
|               | 6.5 in<br>(160 mm)**  | 9.5 in<br>(240 mm) **              | 14.5 in<br>(360 mm) **             | 19 in (480 mm) **                 | 26 in<br>(650 mm) **              |
| 2 (or less)   | 600 (180)   | 750 (225)                          | 1000 (300)                         | 1300 (400)                        | 1650 (500)                        |
| 5             | 400 (120)   | 500 (150)                          | 550 (165)                          | 650 (200)                         | 750 (225)                         |
| 10            | 200 (60)  | 250 (75)                           | 300 (90)                           | 400 (120)                         | 500 (150)                         |
| 15            | 140 (40)  | 170 (50)                           | 200 (60)                           | 325 (100)                         | 450 (140)                         |
| 20            | 100 (30)  | 125 (38)                           | 140 (42)                           | 260 (80)                          | 400 (120)                         |
| 25            | 80 (24)   | 100 (30)                           | 110 (33)                           | 200 (60)                          | 275 (85)                          |
| 30            | 60 (18)   | 75 (23)                            | 90 (27)                            | 130 (40)                          | 200 (60)                          |
| 35            | 60 (18)   | 75 (23)                            | 80 (24)                            | 115 (35)                          | 150 (45)                          |
| 40            | 60 (18)   | 75 (23)                            | 80 (24)                            | 100 (30)                          | 125 (38)                          |
| 45            | 40 (12)   | 50 (15)                            | 60 (18)                            | 80 (24)                           | 100 (30)                          |
| 50            | 40 (12)   | 50 (15)                            | 55 (17)                            | 65 (20)                           | 75 (23)                           |

\* Based on a failure point of 36 in (0.9 m) super silt fence (wire reinforced) at 1000 ft (303 m) of slope, watershed width equivalent to receiving length of sediment control device, 1 in/ 24 hr (25 mm/24 hr) rain event.

\*\* Effective height of Sediment control after installation and with constant head from runoff as determined by Ohio State University.

10. Filtrexx® Sediment control is not to be used in

24 hrs of a runoff event or as designated by the

regulating authority. Sediment control should be

shape and are producing adequate hydraulic flow-

through. If ponding becomes excessive, additional

Sediment control may be required to reduce effective

slope length or sediment removal may be necessary.

Sediment control shall be inspected until area above

has been permanently stabilized and construction

1. The Contractor shall maintain the Sediment

be repaired, or replaced if beyond repair.

it shall be routinely inspected.

control in a functional condition at all times and

regularly inspected to make sure they maintain their

**INSPECTION AND MAINTENANCE** 

activity has ceased

perennial, ephemeral, or intermittent streams.

324 | Filtrexx Low Impact Design Manual | Version 8.0

A2-43

ZΨ VIST **∀0** 

REVISIONS

ARRO 420

DRAWN BY SLK **REVIEWED BY MDT** DATE **9/22/16** 

DRAWING NAME **EROSION AND** SEDIMENT CONTROL

DETAILS AND NOTES

SHEET NO. **ESC 103** 

SWPPP Cut Sheet -1.1. Filtrexx® Sediment Control

- 2" X 2" X 36" WOODEN STAKES PLACED 10' O.C. — FILTREXX® SOXX™ (12" TYPICAL) BLOWN/PLACED FILTER MEDIA ™ — AREA TO BE PROTECTED **WORK AREA** 12" MIN **SECTION** NTS — 2" X 2" X 36" WOODEN STAKES PLACED 10' O.C. AREA TO BE PROTECTED — FILTREXX® SOXX™ (12" TYPICAL) WATER FLOW **WORK AREA** I. ALL MATERIAL TO MEET FILTREXX® SPECIFICATIONS. 2. FILTER MEDIA™ FILL TO MEET APPLICATION REQUIREMENTS. 3. COMPOST MATERIAL TO BE DISPERSED ON SITE, AS DETERMINED BY ENGINEER. FILTREXX® SEDIMENT CONTROL

Construction Activities | Section 1: Erosion & Sediment Control | 325 let nature do it." A2-44

Appendix A5 – Good Housekeeping/Materials Management

National Pollutant Discharge Elimination System Manual

01C11R.DOC

August 2012

Revision 2

**Concrete Waste Management Applications** Perimeter Control DESCRIPTION Slope Protection Concrete waste management prevents or reduces the discharge Sediment Trapping Channel Protection Temporary Stabilization Permanent Stabilization The following low-cost measures will help reduce storm water ✓ Waste Management ✓ Housekeeping Practices **Targeted Constituents**  Perform washout of concrete trucks offsite or in designated Sediment

Nutrients **Toxic Materials** Oil and Grease Floatable Materials ✓ Construction Wastes

Significant ✓ Medium Unknown or Questionable

LIMITATIONS

properly managed.

MAINTENANCE REQUIREMENTS

If using a temporary pit, dispose of hardened concrete on a regular basis.

01C11R.DOC

of pollutants to storm water by conducting washout offsite, performing onsite washout in a designated area, and training employees and subcontractors. **APPLICATIONS** 

pollution from concrete wastes: Store dry and wet materials under cover, away from

drainage areas. Avoid mixing excess amounts of fresh concrete or cement

areas only. Do not wash out concrete trucks into storm drains, open ditches, streets, or streams.

• Do not allow excess concrete to be dumped onsite except in designated areas. For onsite washout:

<sup>±</sup> Locate washout area at least 50 feet from storm drains, open ditches, or water bodies. Prevent runoff from this area by constructing a temporary pit or bermed area large enough for liquid and solid waste. Wash out wastes into the temporary pit where the

concrete can set, be broken up, and then disposed of When washing concrete to remove fine particles and expose

the aggregate, avoid creating runoff by draining the water to a bermed or level area. Do not wash sweepings from exposed aggregate concrete into the street or storm drain. Collect and return sweepings

to aggregate base stock pile, or dispose in the trash. • Train employees and subcontractors in proper concrete waste management.

Offsite washout of concrete wastes may not always be possible.

Inspect subcontractors to ensure that concrete wastes are being