
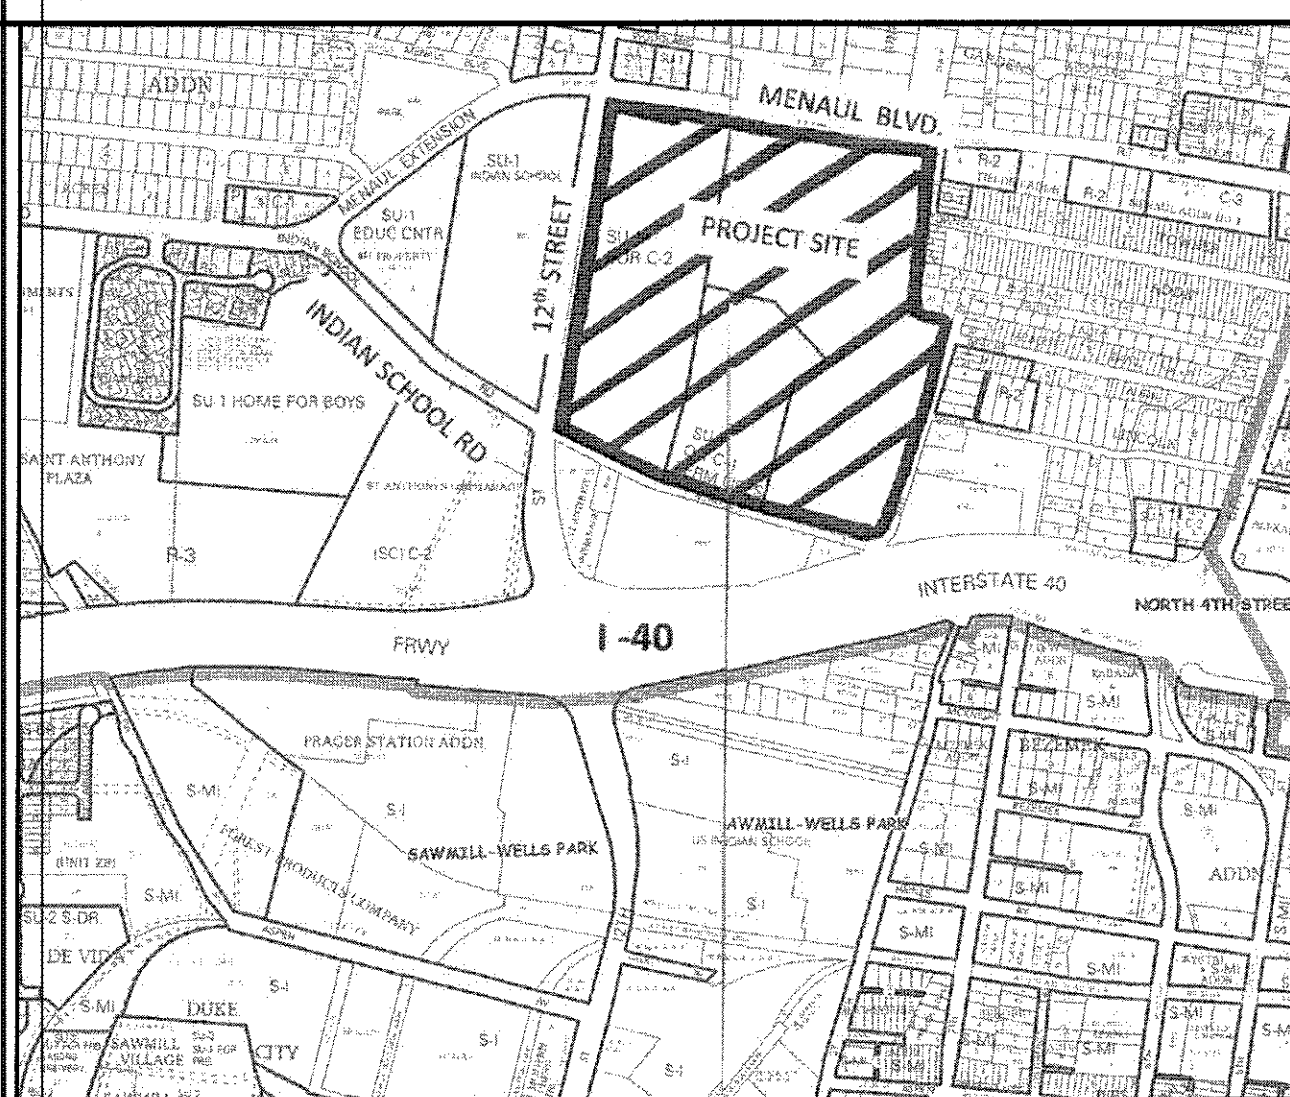


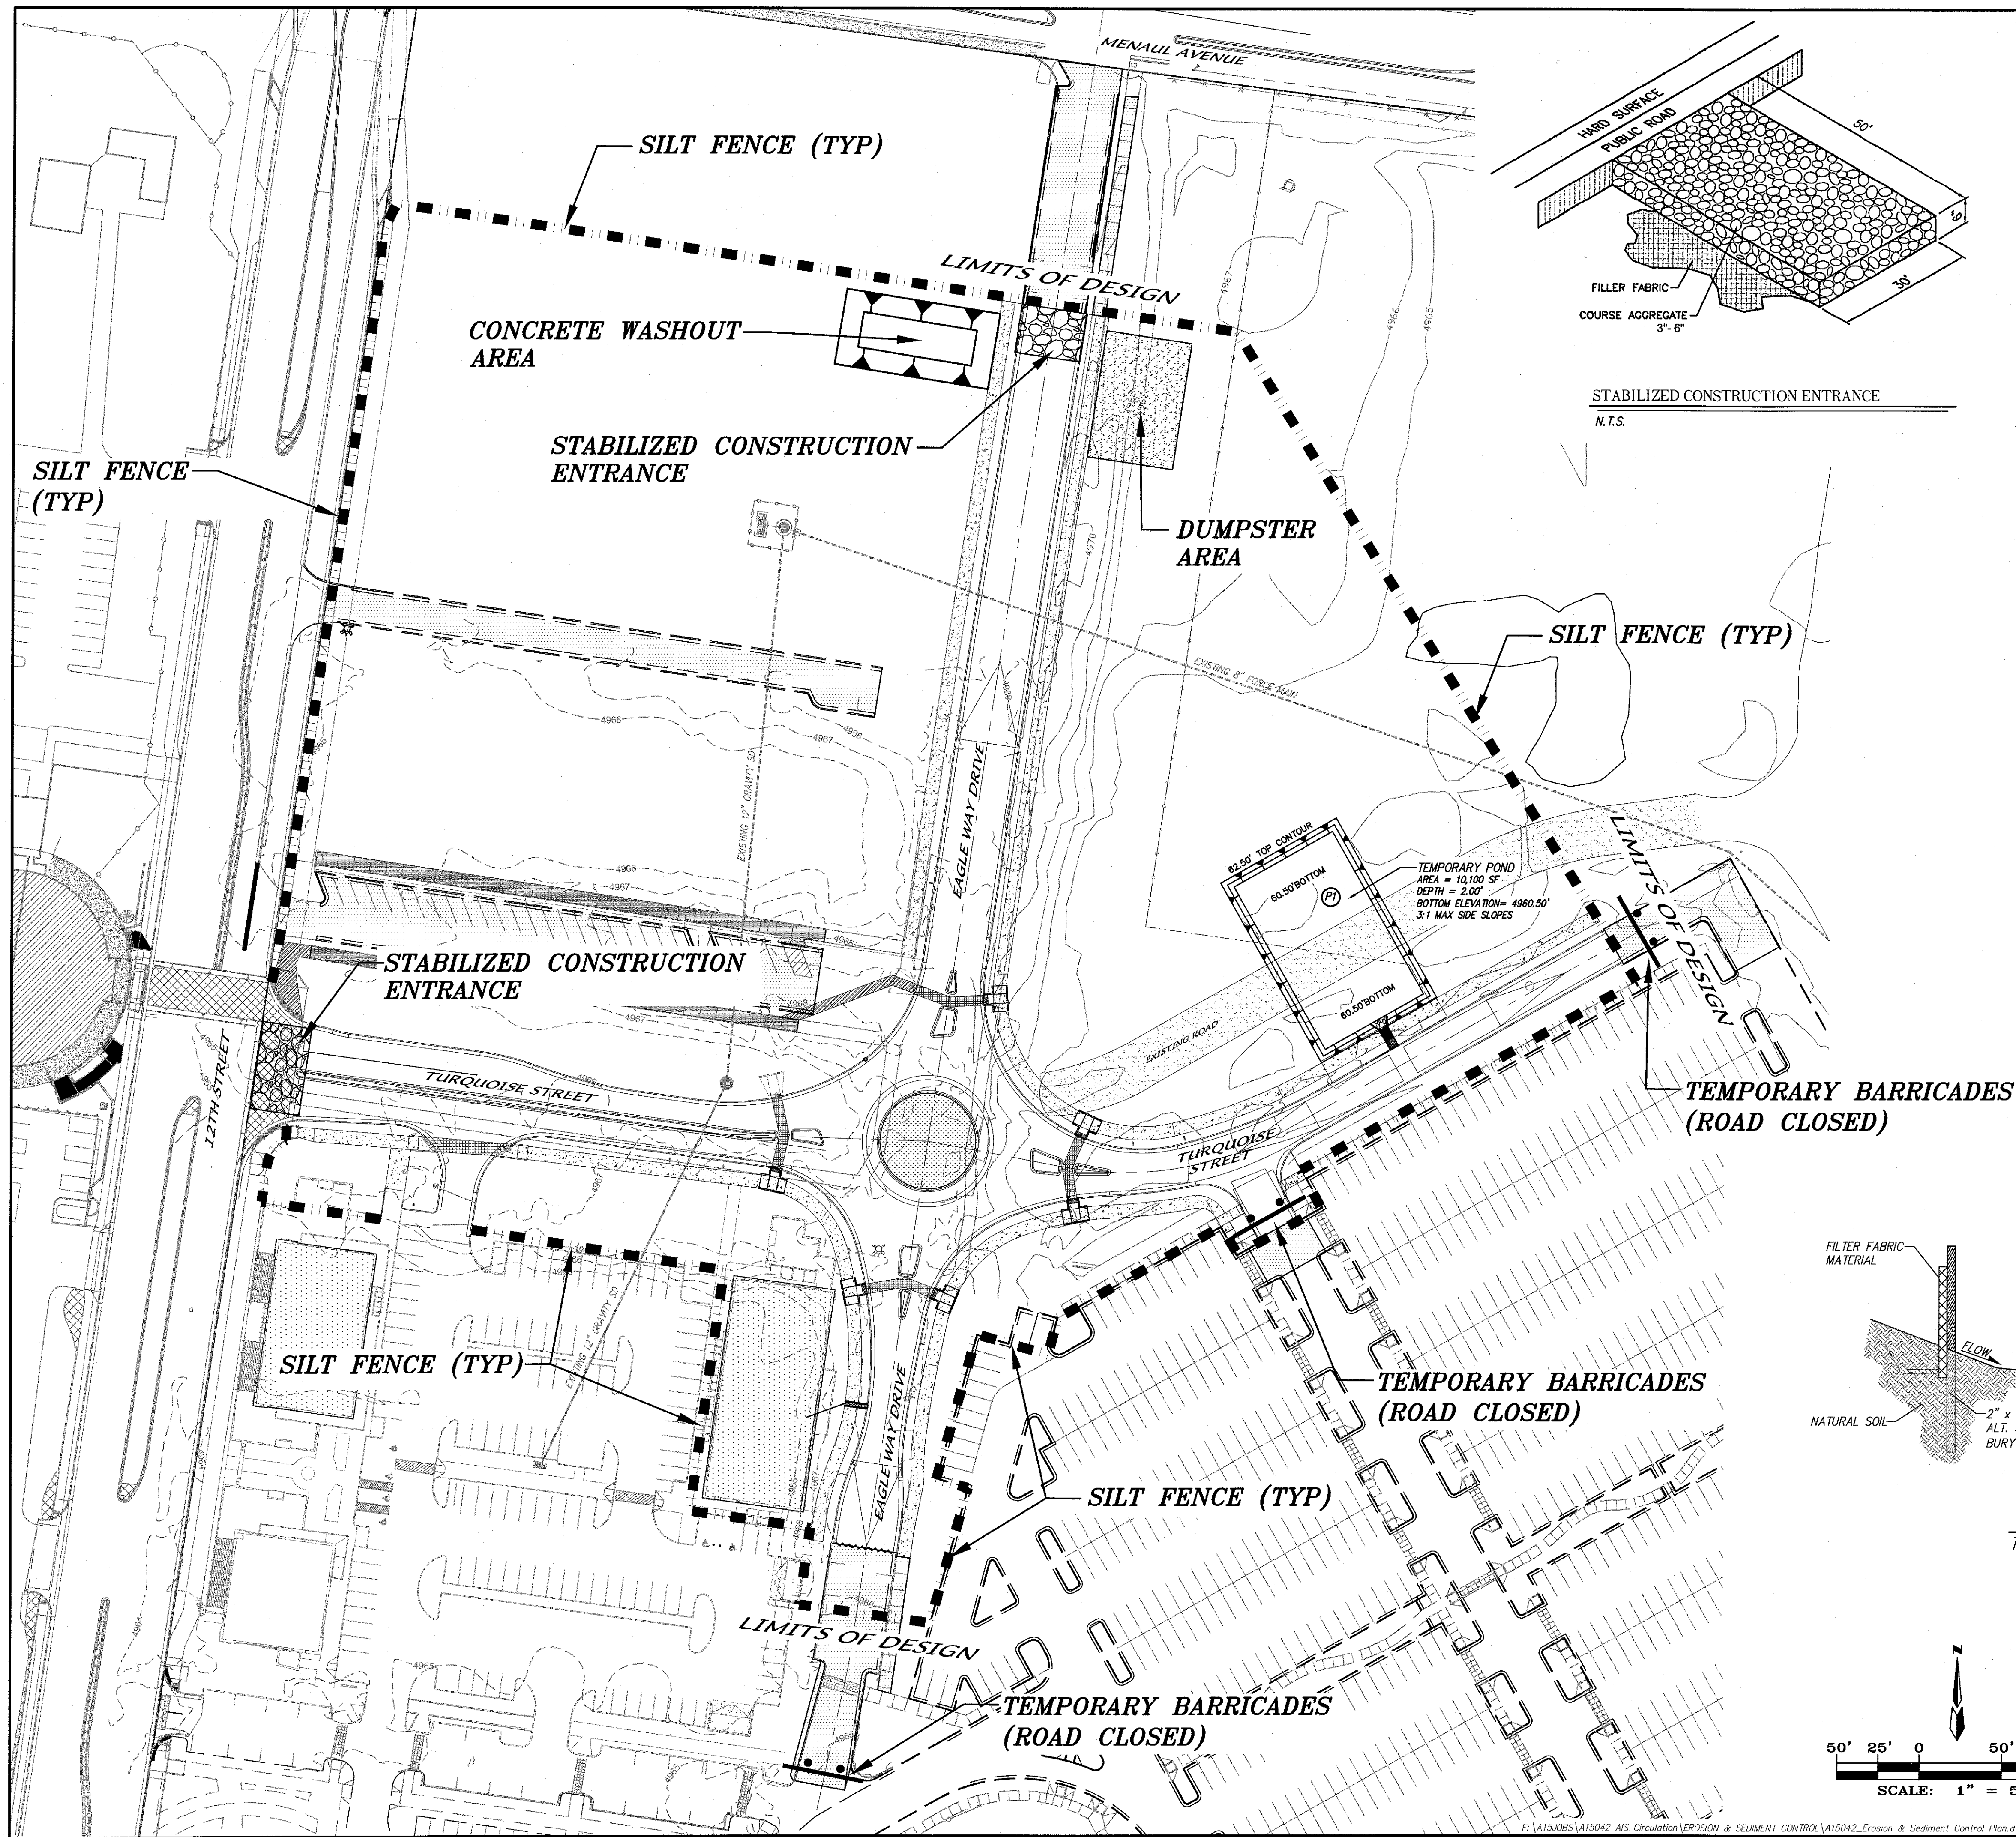

VICINITY MAP



ZONE ATLAS MAP H-14-Z

GENERAL NOTES


1. WHEN DOING WORK IN THE CITY ROW (EG, SIDEWALK, DRIVE PADS, UTILITIES) PREVENT DIRT FROM GETTING INTO THE STREET. IF DIRT IS PRESENT IN THE STREET, THE STREET SHOULD BE SWEEPED EVERY FEW DAYS OR THE SAME DAY IF RAIN IS IMMINENT.
2. ALL SOIL DISTURBED DURING UTILITY TRENCHING SHOULD BE PLACED ON THE UPSTREAM SIDE OF THE STREET CUT AND THE AREA SWEEPED AFTER THE WORK IS COMPLETE.

LEGEND

- PERIMETER WALL OR SILT FENCE (TYPICAL)
- CONCRETE WASHOUT AREA
- STABILIZED CONSTRUCTION ENTRANCE
- DUMPSTER AREA
- TEMPORARY BARRICADES

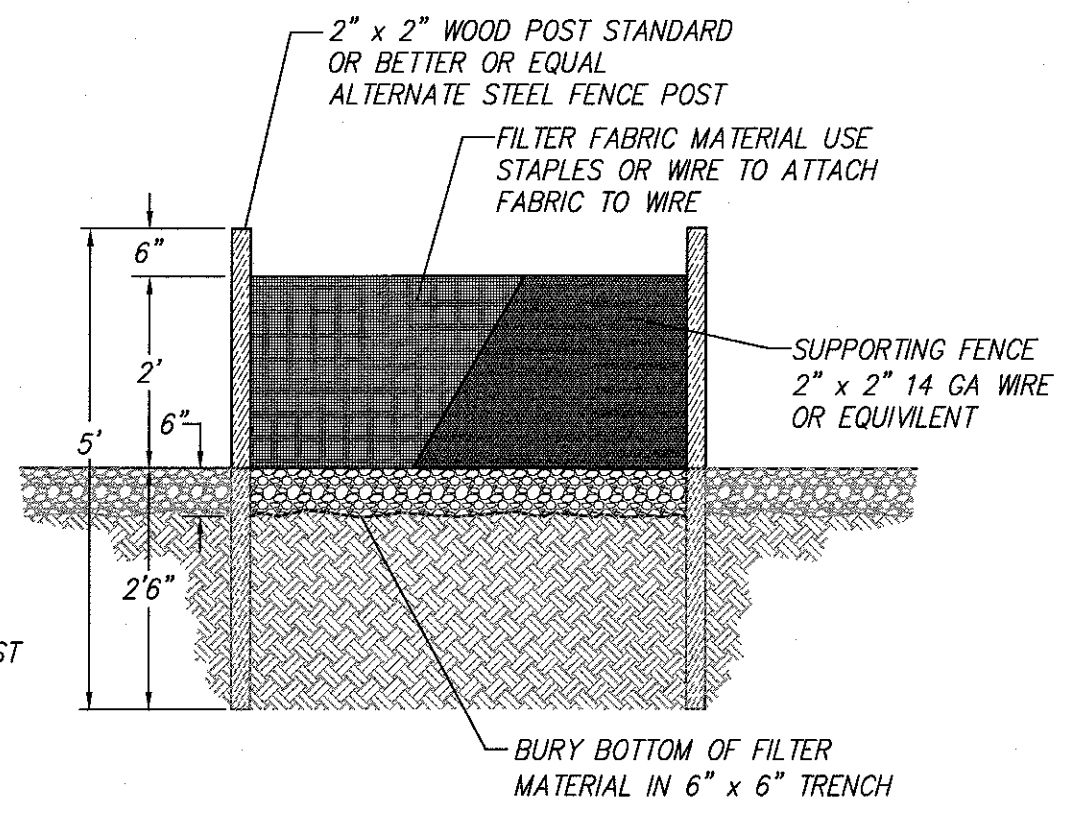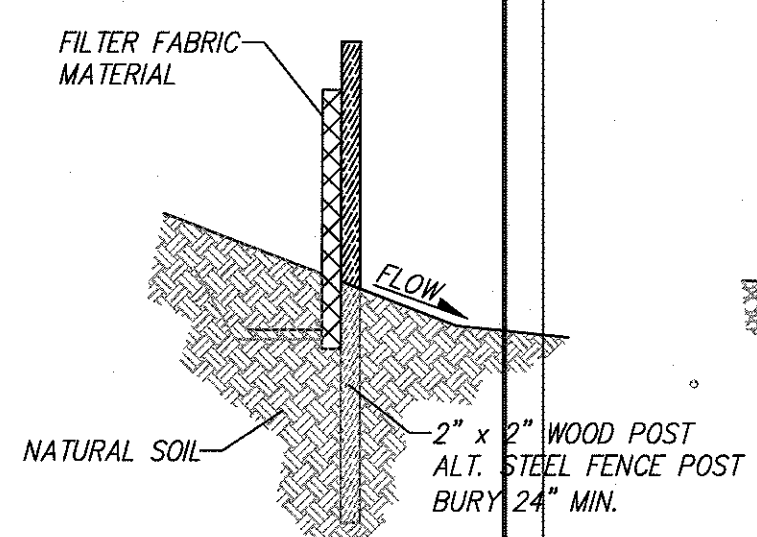

SILT FENCE FOR SEDIMENT CONTROL

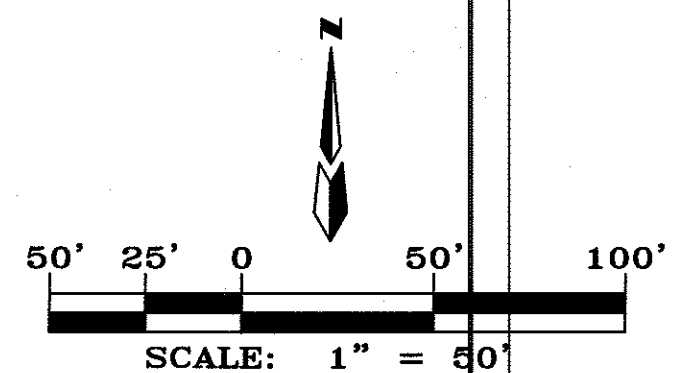

TITLE:	
AIS CIRCULATION	
EROSION & SEDIMENT CONTROL PLAN	
dmg MARK GOODWIN & ASSOCIATES, P.A. CONSULTING ENGINEERS P.O. BOX 90606 ALBUQUERQUE, NEW MEXICO 87199 OFFICE (505) 828-2200, FAX (505) 797-9539	
LAST DESIGN UPDATE	MO./DAY/YR.
DESIGNED BY: DLH	MO./DAY/YR.
DRAWN BY: DER	MO./DAY/YR.
CHECKED BY: DMG	MO./DAY/YR.
DATE: 11/15/16	DATE: 06/16
JOB: A15042	DATE: 06/16
ZONE MAP NO. H-14	DATE: 06/16
SHEET 1	OF 1