


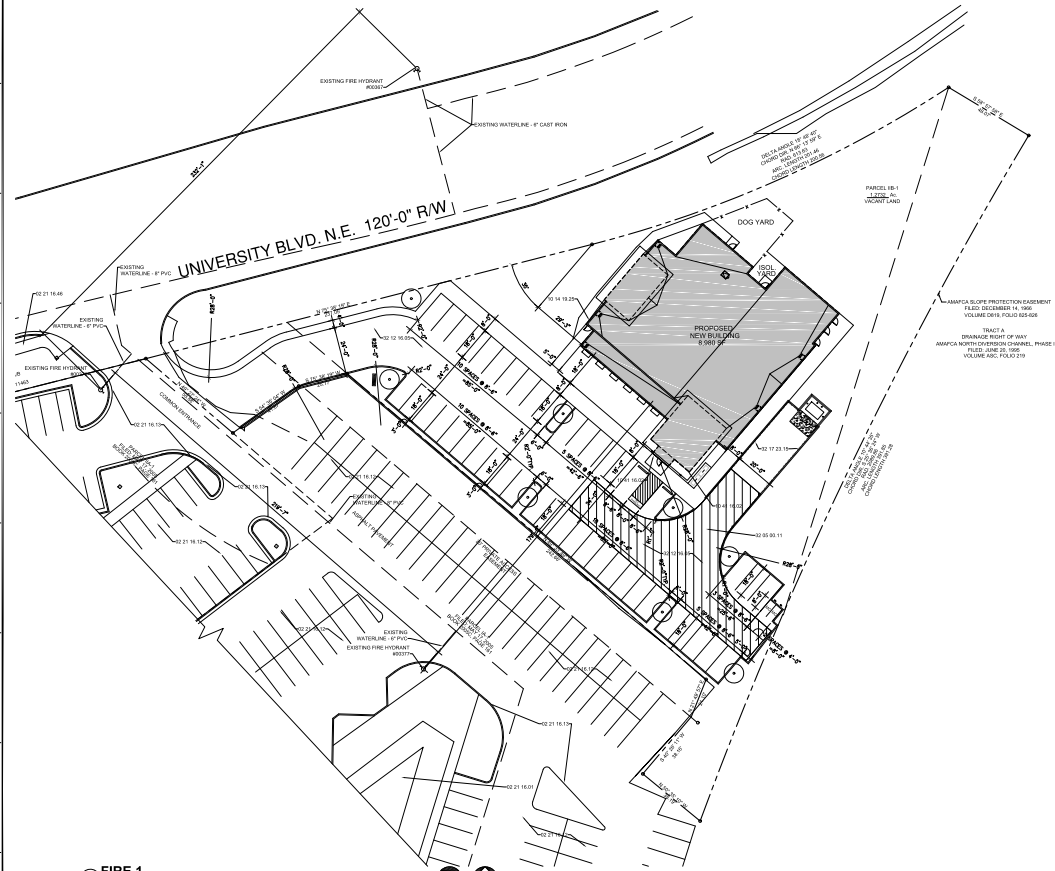

ALBUQUERQUE FIRE MARSHAL'S OFFICE
PERMIT
PROJECT: 10042001
APPROVED DATE: 10/04/2021
FIRE FLOW: 2,500 GPM @ 150 PSI

GRADE (USABLE AREA CURRENT)	0.000 SF - BUILDING NON SPRAWLED
MAX BRACED HEIGHT	20' 0"
RELEASE CODE	2010 P.C.
	2010 MPA (U) LIFE SAFETY
	CODE IN LOCAL JURISDICTIONS

APPENDIX B
FIRE FLOW REQUIREMENTS
FIRE FLOW CALCULATION # 0.741 SF
TABLE B-101
TYPE 10 MPA @ 150 PSI
2,500 FIRE FLOW REQUIREMENT
W/ FLOW DURATION OF 2 HOURS

APPENDIX C
FIRE HYDRANT LOCATIONS AND DISTRIBUTION
TABLE C-101
2,500 FIRE FLOW REQUIREMENT - 3 HYDRANTS
MINIMUM SPACING BETWEEN MAX DISTANCE 200 FEET
EXISTING HYDRANTS - 3 HYDRANTS

APPENDIX D
FIRE APPARATUS ACCESS ROAD
ROAD CROSS-SECTION - 20' FEET FROM PROPERTY BOUNDARY TO THE MEDIAN OF THE ALTERNATE 10' WIDENING TURNAROUND
ROAD CROSS-SECTION - 20' FEET FROM PROPERTY BOUNDARY TO THE MEDIAN OF THE ALTERNATE 10' WIDENING TURNAROUND
ACCEPTABLE ALTERNATE TO 10' WIDENING TURNAROUND

REFERENCE KEYNOTES
DIVISION 02 - EXISTING CONDITIONS
02 21 16.01 - EXISTING STRUCTURE
02 21 16.02 - EXISTING PARKING
02 21 16.03 - EXISTING CONCRETE CURB
02 21 16.04 - EXISTING CONCRETE SIDEWALK
DIVISION 16 - SPECIALTIES
16 14 16.05 - ADDRESS NUMBERS 4" IN HEIGHT MIN.
16 41 16.06 - FIRE DEPARTMENT KIOSK BOX - VERIFY LOCATION WITH LOCAL FIRE DEPARTMENT
DIVISION 32 - EXTERIOR IMPROVEMENTS
32 08 05.11 - FIRE TRUCK TURN AROUND
32 12 16.05 - ASPHALT DRIVE
FIRE LANE - CURB PAINTED RED WITH 6" WHITE LETTERING "NO PARKING" FIRE LANE ORANGE OR CLAN IN WHITE BLOCK CAPITAL LETTERS WITH NOT LESS THAN 3" STROKES EVERY 12"

Blue Cross Animal Clinic
University Blvd. NE
Albuquerque, New Mexico 87106
Copyright 2021, BDA Architecture, P.C.

FIRE 1

NO.	DATE	COMMENTS
1	10/04/2021	ISSUED FOR PERMIT
2	10/04/2021	ISSUED FOR PERMIT
3	10/04/2021	ISSUED FOR PERMIT
4	10/04/2021	ISSUED FOR PERMIT
5	10/04/2021	ISSUED FOR PERMIT
6	10/04/2021	ISSUED FOR PERMIT
7	10/04/2021	ISSUED FOR PERMIT
8	10/04/2021	ISSUED FOR PERMIT
9	10/04/2021	ISSUED FOR PERMIT
10	10/04/2021	ISSUED FOR PERMIT

FIRE 1
OF