

1 FIRE 1 PLAN
SCALE: 1" = 10'-0"



ALBUQUERQUE FIRE MARSHAL'S
DIVISION OFFICE PLANS
CHECKING DIVISION
PERMIT
PERMIT NUMBER: FP-22-009634
APPROVED DATE: 03/31/22
APPROVED

THESE CONSTRUCTION DOCUMENTS WERE REVIEWED AND APPROVED BY THE ALBUQUERQUE FIRE MARSHAL'S OFFICE IN ACCORDANCE WITH THE CITY ORDINANCE, THE INTERNATIONAL FIRE CODE, AND NFPA STANDARDS. THIS PERMIT IS VALID FOR 60 DAYS. FINAL INSPECTION IS REQUIRED.
FIRE FLOW: 4617 SQ FT V-B 1750 GPM 1 HYDRANT

FIRE NOTES:

1. THE TOTAL HEIGHT OF THE BUILDING: 15'-0"
2. BUILDING CONSTRUCTION TYPE TO BE TYPE V-B.
3. BUILDING NOT SPRINKLED.
4. THE PARKING LOT AND ROAD SHALL BE ASPHALT AND CAPABLE OF SUPPORTING AN IMPOSED LOAD OF A FIRE APPARATUS WEIGHING 75,000 LBS.
5. THE MINIMUM DRIVE ISLE WIDTH SHALL BE 24' U.N.O.
6. BUILDINGS SHALL NOT EXCEED 10 PERCENT IN GRADE.
7. BUILDING SHALL HAVE APPROVED ADDRESS NUMBERS OR BUILDING IDENTIFICATION PLACED IN A POSITION PLAINLY LEGIBLE AND VISIBLE FROM THE STREET.
8. WORK SHALL BE IN ACCORDANCE WITH THE APPROVED CONSTRUCTION DOCUMENTS, AND ANY CHANGES MADE DURING CONSTRUCTION THAT ARE NOT IN COMPLIANCE WITH THE APPROVED CONSTRUCTION DOCUMENTS SHALL BE RESUBMITTED FOR APPROVAL AS AN AMENDED SET OF CONSTRUCTION DOCUMENTS. APPROVED WET STAMPED SHOP DRAWINGS SHALL BE ON SITE FOR INSPECTIONS.
11. PROVIDE A KNOX BOX AT THE MAIN ENTRANCE TO BUILDING.
12. PROPOSED FIRE APPARATUS ACCESS ROAD SHALL NOT EXCEED 10% IN GRADE.
13. BUILDING SQUARE FOOTAGES:
CHAMPION XPRESS CAR WASH: 4,816.84 S.F.
14. FIRE FLOW TO BE 1.0 GAL/MIN. PER APPENDIX B TABLE B105.1(2)

GENERAL SITE NOTES:

- A. ALL DIMENSIONS SHOWN ARE TO THE FACE OF CURB U.N.O.
- B. REFER TO SITE PLAN FOR ALL RADII.

LEGEND:


- PROPOSED MARKED FIRE LANE
EXISTING CURB
NEW CURB

KEYED NOTES:

1. EXISTING HYDRANT, RE: NOTE 14 FOR FIRE FLOW.
2. PROPOSED BUILDING IDENTIFICATION
3. PROPOSED KNOX BOX

REV	DATE	BY	REVISION

MODULUS ARCHITECTS
100 SUN AVENUE NE SUITE 600
ALBUQUERQUE, NEW MEXICO 87109
PHONE (505) 338-1499 FAX (505) 338-1498
TOLL FREE 1-866-224-2161

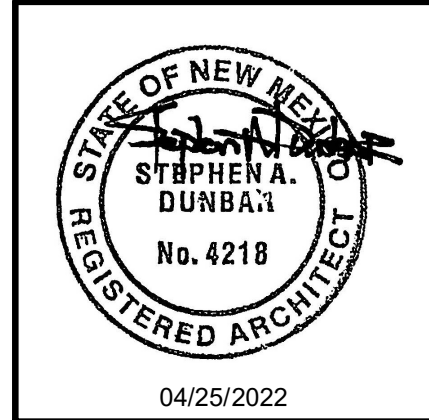

NOT FOR CONSTRUCTION

PROJECT TITLE CHAMPION XPRESS CARWASH 2100 CENTRAL AVE, ALBUQUERQUE, NM 87104	PROJECT MANAGER	JOB NO. Project Number	DRAWN BY:
SHEET TITLE FIRE 1 PLAN			

DATE 04/25/2022	SHEET G7
SCALE:	