FOR CONTINUATION SEE SHEET C2.01

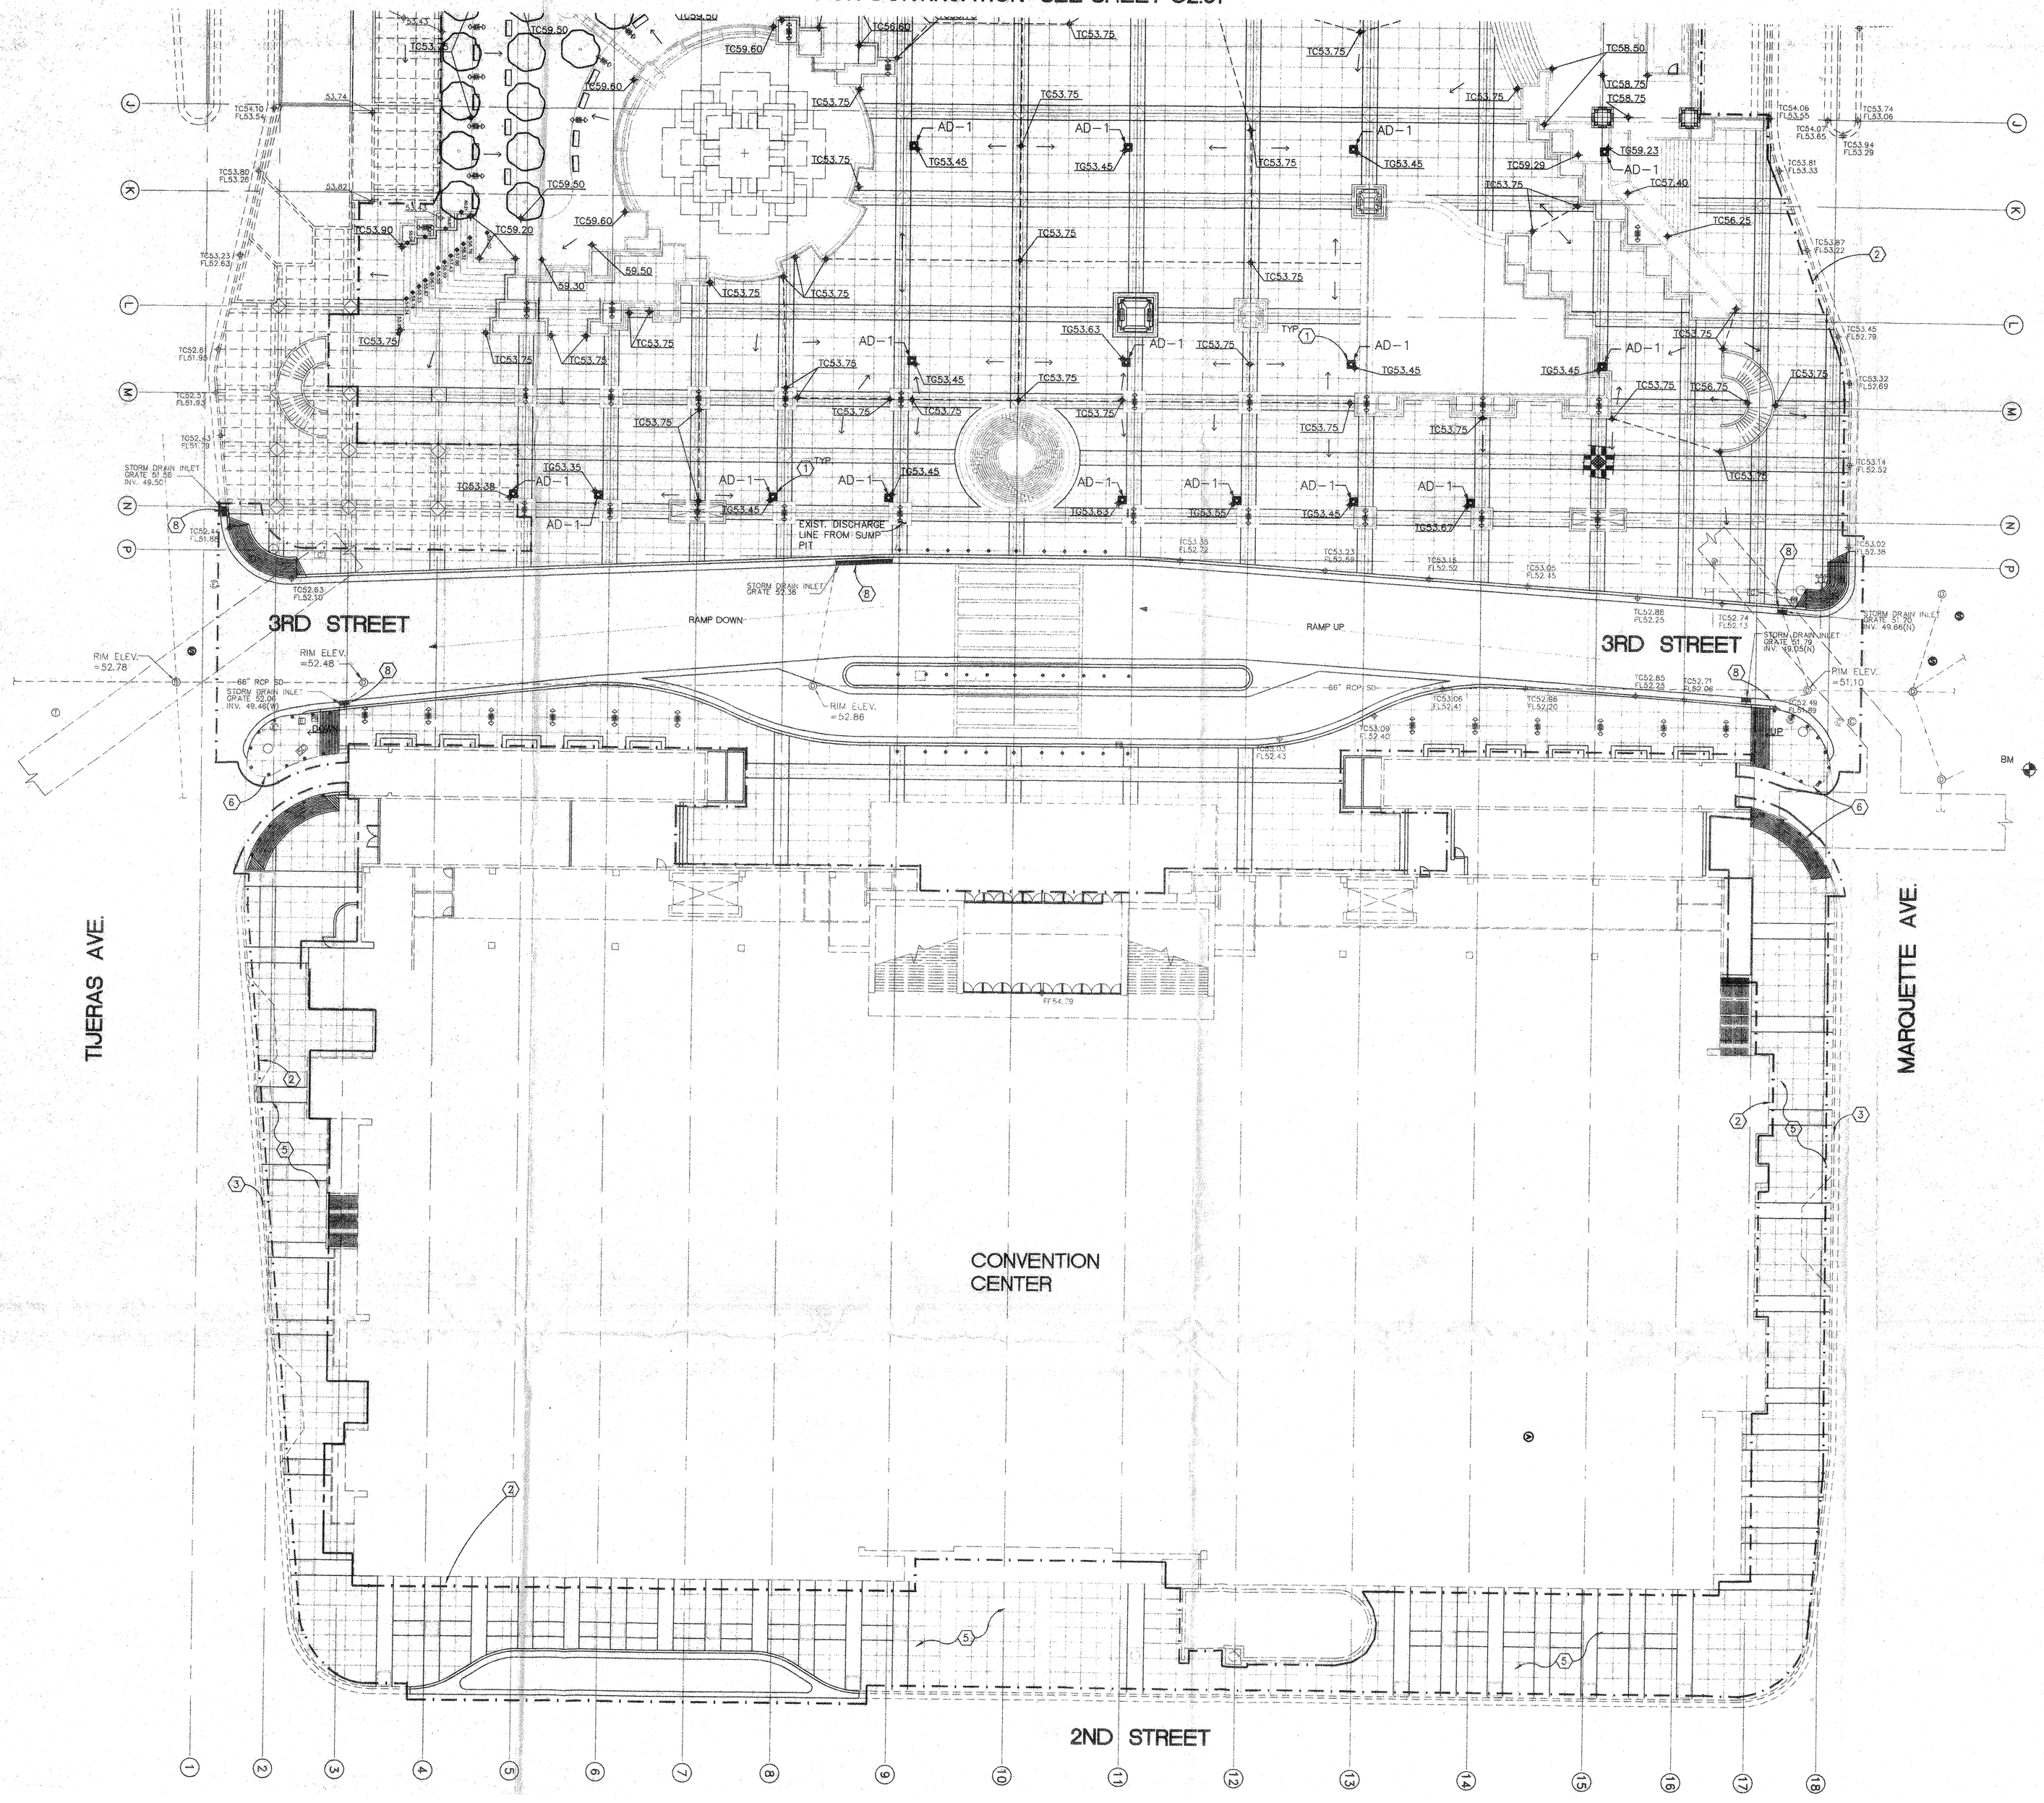


## LEGEND

| | |
|---|---|
| AD-1 | NEW AREA DRAIN |
| | PROPOSED PLAZA RENOVATION |
| | EXIST. CURB AND GUTTER |
| | NEW CURB AND GUTTER |
| | EXIST. BUILDING |
| | LINES OF GRADE BREAK |
| | EXIST. CATCH BASIN TO REMAIN |
| TC53.75 | NEW SPOT ELEVATION |
| | DIRECTION OF FLOW |
| TC53.38 | EXISTING SPOT ELEVATION |
| | LIMITS OF DEMOLITION |
| SD | EXIST. STORM DRAIN |
| FM | EXIST. FORCE MAIN |

## KEYED NOTES

1. INSTALL AREA DRAIN PER PLUMBING SHEET. TYP.
2. LIMITS OF NEW CONSTRUCTION.
3. EXISTING CURB TO REMAIN.
4. NEATLY SAWCUT AND REMOVE EXISTING PAVEMENT. MATCH NEW PAVEMENT TO EXISTING ELEVATION.
5. NEATLY REMOVE AND REPLACE SIDEWALK TO SAME ELEVATION AS EXISTING.
6. EXISTING CURB TO BE REMOVED.
7. BEGIN CURB CONSTRUCTION AND CURB HEIGHT TRANSITION FROM 0" TO 6" IN 10'.
8. MODIFY TOP OF INLET TO CONFORM TO NEW TOP OF CURB AND FLOW LINE ELEVATIONS.

## GENERAL NOTES

1 PUBLIC ROAD CONSTRUCTION TO BE DONE UNDER CITY WORK ORDER 4318.90.

2 EXISTING STORM DRAIN INFORMATION FOR STORM DRAIN LINES AROUND THE CITY/COUNTY BUILDINGS WAS TAKEN FROM DESIGN DRAWINGS FOR THE "CITY/COUNTY MUNICIPAL OFFICE BUILDING" DATED 12/7/83.

## LEGAL DESCRIPTION

LOTS 1, 2, 4, B AND C, MANDEL'S BUSINESS AND RESIDENCE ADDITION.

## BENCHMARK

A 1 3/4" ALUMINUM DISK STAMPED "ACS BM, 19-K14" EPOXIED TO THE OF THE CURB AT THE E-NE CURB RETURN OF MARQUETE AVE. AND THIRD ST. NE
ELEV.=4952.97

## SURVEY

SOURCES OF SURVEY DATA ARE: COA RECORD DRAWINGS FOR 3RD ST. SUPPLEMENTED BY FIELD DATA COLLECTED BY CHAVEZ-GRIEVES ON 6-25-95.

NORTH

GRAPHIC SCALE

( IN FEET )
1 inch = 20 ft.

| REVISION | DATE | DESCRIPTION |
|---|---|---|
| | | |
| | | |
| | | |
| | | |

09-25-95 DATE
9507 FILE
C-G/JK PROJ. MGR. | C-G/RFC BY
QUALITY ASSURANCE
1"=20' SCALE

# FMSM
## CIVIC PLAZA PHASE II RENOVATIONS

Flatow Moore Shaffer McCabe
Architects Interior Designers
Landscape Architects Planners
Albuquerque, New Mexico
Copyrighted. All rights reserved.

JOE P. KELLEY NEW MEXICO 9956 REGISTERED PROFESSIONAL ENGINEER
RECEIVED - 3 1995

C2.02 DRAINAGE PLAN

JOB NO. 9507 DATE 1992
FILE: C:\SSA\BMT\DWG (06-18-93)
REF: (09-25-95) (FS SEW 11)