
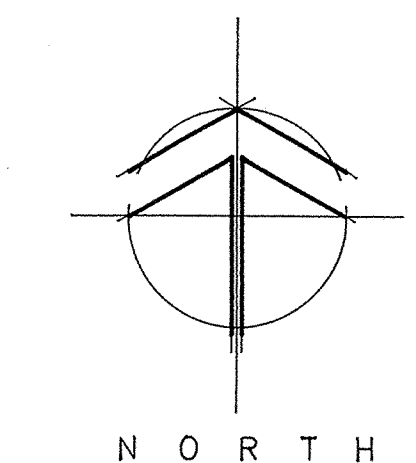


KEYED NOTES -- THIS SHEET :

- 1 EXISTING TREE AND BENCH -- TAKE CARE TO PROTECT WATERING AREA DURING INSTALLATION OF NEW PAVING.
- 2 EXISTING 6'-0" HIGH CHAIN-LINK FENCE.
- 3 NEW 6'-0" HIGH CHAIN-LINK FENCE.
- 4 EXISTING 6'-0" HIGH STEEL TUBE FENCE WITH PILASTERS.
- 5 NEW 6'-0" HIGH STEEL TUBE FENCE WITH PILASTERS. SEE DETAIL SHEET C-502.
- 6 EXISTING SERVICE GATE TO REMAIN.
- 7 NEW GATE TO MATCH FENCE TYPE.
- 8 NEW SITE WALL.
- 9 EXISTING RAMP AND STAIRS.
- 10 NEW CURB CUT PER CITY OF ALBUQUERQUE STANDARD DETAIL.
- 11 RE-LOCATED NON-ILLUMINATED SIGN.
- 12 RAISED PLANTER. SEE DETAIL SHEET C-501.
- 13 RELOCATED BENCHES (BY GEN. CONTRACTOR). SEE DETAIL SHEET C-501.
- 14 CONCRETE PLAZA / WALK. SAWCUT JOINTS IN PATTERN INDICATED. SEE DETAIL SHEET C-501.
- 15 NEW 6" CURB / GUTTER AND/OR NEW 6" WIDE SIDEWALK PER CITY OF ALBUQUERQUE STANDARD DETAIL.
- 16 STANDARD 8'-6" WIDE X 20'-0" LONG PARKING SPACE, PAINTED STRIPING.
- 17 VAN PARKING WITH 8'-6" WIDE X 20'-0" SPACE AND 8'-0" WIDE X 20'-0" LOADING AREA, PAINTED STRIPING.
- 18 EXISTING UTILITY POLE.
- 19 EXISTING STREET LIGHT.
- 20 EXISTING FIRE HYDRANT.
- 21 NEW PARKING BUMPER, TYPICAL. SEE DETAIL SHEET C-501.
- 22 NEW ASPHALT PAVING.
- 23 NEW SAND PERIMETER (BY GEN. CONTRACTOR). SEE DETAIL SHEET C-501.
- 24 NEW WASHED PLAY SAND TO A MINIMUM DEPTH OF 12" (PROVIDED & INSTALLED BY APS PLAYGROUND CONTRACTOR).
- 25 PAINTED GRAPHICS. SEE ENLARGED PLAN SHEET C-402.
- 26 RELOCATED TETHERBALL POLES.
- 27 EXISTING BASKETBALL COURT.
- 28 PLAY STRUCTURE (RELOCATED BY APS PLAYGROUND CONTRACTOR. REFURBISH AS REQUIRED FOR NEW INSTALLATION). SEE ENLARGED PLAN SHEET C-401.
- 29 EXISTING TREE WELL BENCH TO REMAIN.
- 30 RELOCATED TREE WELL BENCH. SEE SIMILAR DETAILS SHEET C-501.
- 31 NEW CONCRETE STEPS AND LANDING. SEE PLAN SHEET A-102.
- 32 IRRIGATION SLEEVE. REFER TO LANDSCAPE DRAWINGS FOR ADDITIONAL INFORMATION.
- 33 18" WIDE CONCRETE APRON. LOCATE AT BUILDING PERIMETER. SEE WALL SECTIONS AND DETAILS FOR ADDITIONAL INFORMATION.
- 34 NEW PLAY EQUIPMENT. SEE ENLARGED PLAN SHEET C-402.
- 35 EXISTING 12 STALL BIKE PARKING TO REMAIN.
- 36 18" WIDE CONCRETE MOW STRIP. LOCATE UNDER WROUGHT IRON FENCING IN FRONT YARD (ONLY).
- 37 PAINTED STRIPED PAVING.
- 38 CONCRETE SLAB. SEE GRADING AND DRAINAGE PLAN SHEET C-105.
- 39 EXISTING REFUSE AREA.
- 40 PAINT CURB IN AREA OF LOADING ZONE.
- 41 NEW NO PARKING SIGN, COORDINATE WITH LOCATION OF LANDSCAPING, SIDEWALK, ETC. SEE SIMILAR SIGN DETAIL SHEET C-501.
SIGN TEXT: NO PARKING LOADING ZONE
- 42 NEW NO PARKING SIGN, COORDINATE WITH LOCATION OF LANDSCAPING, SIDEWALK, ETC. SEE SIMILAR SIGN DETAIL SHEET C-501.
SIGN TEXT: NO PARKING BUS LOADING ZONE

GENERAL NOTES -- THIS SHEET :

A WORK PERFORMED IN THE CITY OF ALBUQUERQUE RIGHT-OF-WAY MAY REQUIRE A SEPARATE PERMIT, AND MAY BE REQUIRED TO BE PERFORMED BY A CONTRACTOR LISTED BY THE CITY OF ALBUQUERQUE AS APPROVED FOR WORK IN THE CITY RIGHT-OF-WAY.

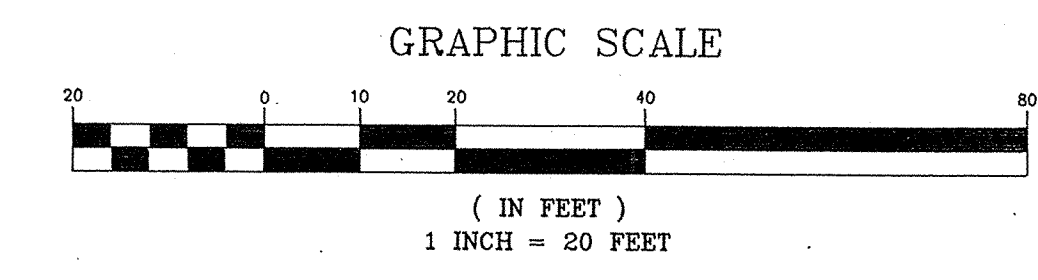

SCALE: 1" = 20'-0"

STATE OF NEW MEXICO
JAMES L. WRIGHT
NO. 1342
REGISTERED ARCHITECT

7-01-02

WRIGHT AND HAMMER
ARCHITECTS
1735 ALBUQUERQUE DRIVE, N.E.
ALBUQUERQUE, N.M. 87110
505-266-6784

ALBUQUERQUE PUBLIC SCHOOLS
LEW WALLACE ELEMENTARY SCHOOL
PHASE 1
ADDITIONS & IMPROVEMENTS
ALBUQUERQUE, NEW MEXICO

DATE:
1 JULY, 2002

REVISIONS:
13 SEPT., 2002

SHEET
104
OF
C