

CITY OF ALBUQUERQUE
PLANNING

These plans have been reviewed
for code compliance and are:


APPROVED

The Approval of these plans shall not
be construed to be a permit for any
violations of any code or ordinance
of this city.

PERMIT #: **T201593067**

DATE: **09/19/16**

A printed copy of these plans shall be on the job site for all
requested inspections.

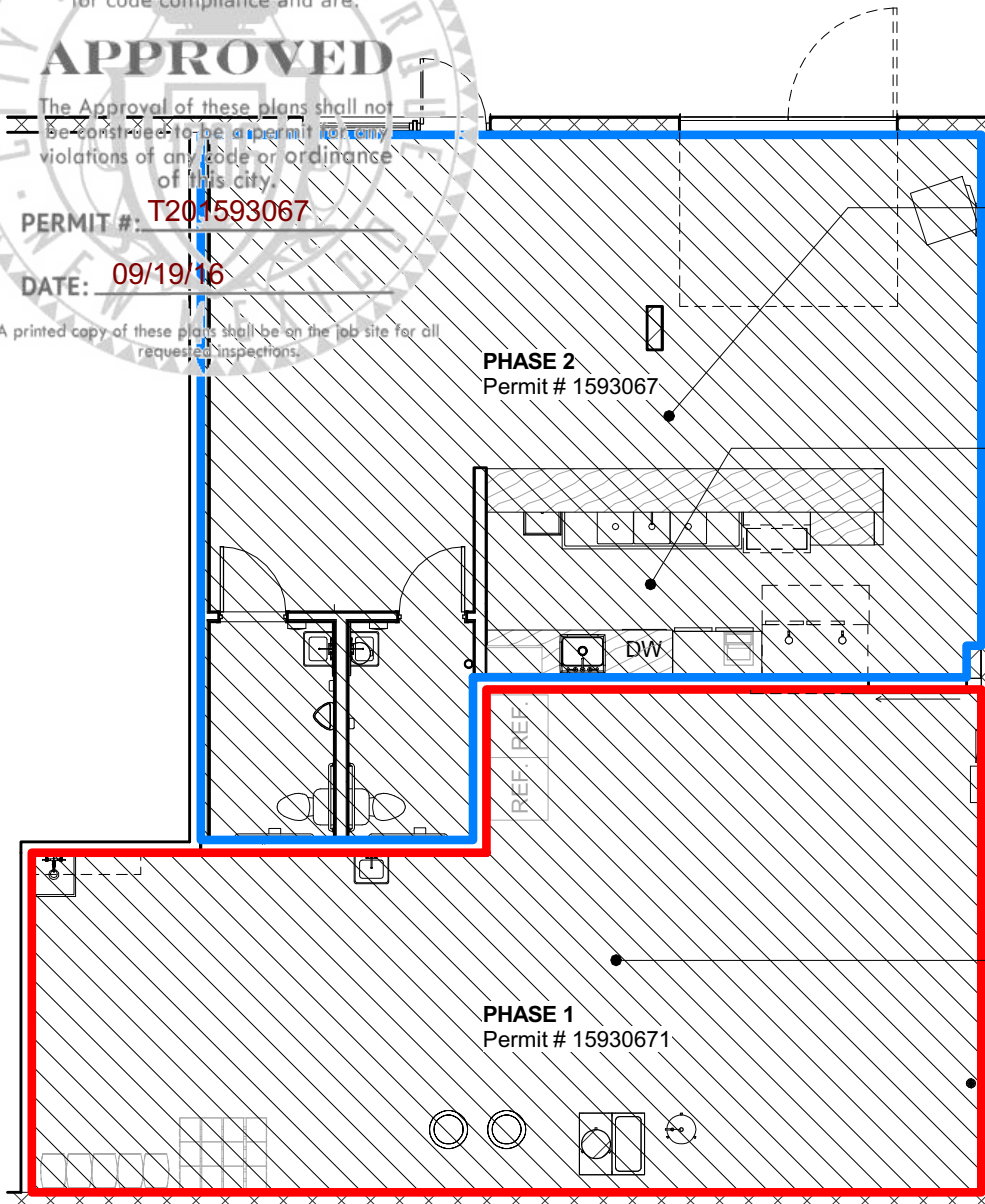

Phase 2
Total Occupant Load = 48

TASTING ROOM
Business Group B
731 gsf / 676 nsf

Assembly without fixed
seats, Unconcentrated
(Tables & Chairs)
676/15 nsf = 45
OCCUPANT LOAD : 45

BAR & BATHROOMS
Business Group B
278 gsf / 257 nsf

Business Areas
278/100 gsf = 3
OCCUPANT LOAD : 3

Phase 1
Total Occupant Load = 10

DISTILLERY PRODUCTION
Factory Group F-1
914 gsf / 849 nsf

Industrial Areas
914 /100 gsf = 10
OCCUPANT LOAD : 10

9/12/2016 11:47:18 AM

STILL SPIRITS DISTILLERY

120 MARBLE AVENUE NW, ALBUQUERQUE NM, 87102

66Architect LLC

2041 South Plaza St.
NW Albuquerque, NM
87104
505.280.0043

PHASING PLAN

DRAWN BY: ZTH
REVIEWED BY: CW
DATE ISSUED: 9/12/2016
PROJECT NO:

ISSUED FOR:

REF:

9-12-16

SKA-2

