

DRAINAGE INFORMATION SHEET

PROJECT TITLE: 1500 GIRARD BLVD. N.E. ZONE ATLAS/DRNG. FILE #: J-16/D10
DRB #: _____ EPC #: _____ WORK ORDER #: _____
LEGAL DESCRIPTION: SOUTH 100' OF WEST 1/2 OF BLK. B, HAINES TRACT ADDITION
CITY ADDRESS: 1500 GIRARD BLVD. N.E.
ENGINEERING FIRM: W. REED EDGEL, P.E. CONTACT: MR. EDGEL
ADDRESS: 601 VASSAR N.E., 87106 PHONE: 255-2675
OWNER: MR. HAROLD TIDENBERG CONTACT: OWNER
ADDRESS: 1525 GIRARD N.E. 87106 PHONE: 262-0421
ARCHITECT: N/A CONTACT: _____
ADDRESS: _____ PHONE: _____
SURVEYOR: TORRES SURVEYING Co. CONTACT: MR. JIM TORRES
ADDRESS: 1570 BRIDGE BLVD. S.W. 87105 PHONE: 291-7085
CONTRACTOR: ? CONTACT: _____
ADDRESS: _____ PHONE: _____

TYPE OF SUBMITTAL:

- ☐ DRAINAGE REPORT
☒ DRAINAGE PLAN
☐ CONCEPTUAL GRADING & DRAINAGE PLAN
☒ GRADING PLAN
☐ EROSION CONTROL PLAN
☐ ENGINEER'S CERTIFICATION
☐ OTHER

PRE-DESIGN MEETING:

- ☒ YES
☐ NO
☐ COPY PROVIDED

CHECK TYPE OF APPROVAL SOUGHT:

- ☐ SKETCH PLAT APPROVAL
☐ PRELIMINARY PLAT APPROVAL
☐ S. DEV. PLAN FOR SUB'D. APPROVAL
☐ S. DEV. PLAN FOR BLDG. PERMIT APPROVAL
☐ SECTOR PLAN APPROVAL
☐ FINAL PLAT APPROVAL
☐ FOUNDATION PERMIT APPROVAL
☐ BUILDING PERMIT APPROVAL
☐ CERTIFICATE OF OCCUPANCY APPROVAL
☐ GRADING PERMIT APPROVAL
☒ PAVING PERMIT APPROVAL
☐ S.A.D. DRAINAGE REPORT
☐ DRAINAGE REQUIREMENTS
☐ OTHER _____ (SPECIFY)

DATE SUBMITTED: AUGUST 10, 1992
BY: W. REED EDGEL, P.E.

R
W. REED EDGEL, MS, PE
* CONSULTING ENGINEER GDP: 1500 GIRARD BLVD NE
m s 601 Vassar Dr NE
.*P E*. Albuquerque, NM 87106
W E 505 255 2675

92064
Rodriguez
08/10/92
sh / of /

Site Area: 13696 ft² = 0.314416 Ac
Q100 = CIA (Rational Method)
R6 (100 year, 6 Hr) = 2.3 in
Tc = 10 min

Existing conditions:	Area	C	AxC
Roof	2700	0.9	2430
Asphalt/Concrete	10996	0.95	10446
Landscaping	0	0.25	0
Undeveloped	0	0.4	0
Total/Combined	13696	0.940	12876



$I = R6 * 6.84 * Tc^{-.51} = 4.861652$

Q100 = CIA = 1.437089 cfs

Proposed conditions:	Area	C	AxC
Roof	2700	0.9	2430
Asphalt/Concrete	10996	0.95	10446
Landscaping	0	0.25	0
Undeveloped	0	0.4	0
Total/Combined	13696	0.940	12876

Q100 = CIA = 1.437089 cfs

0 cfs increase

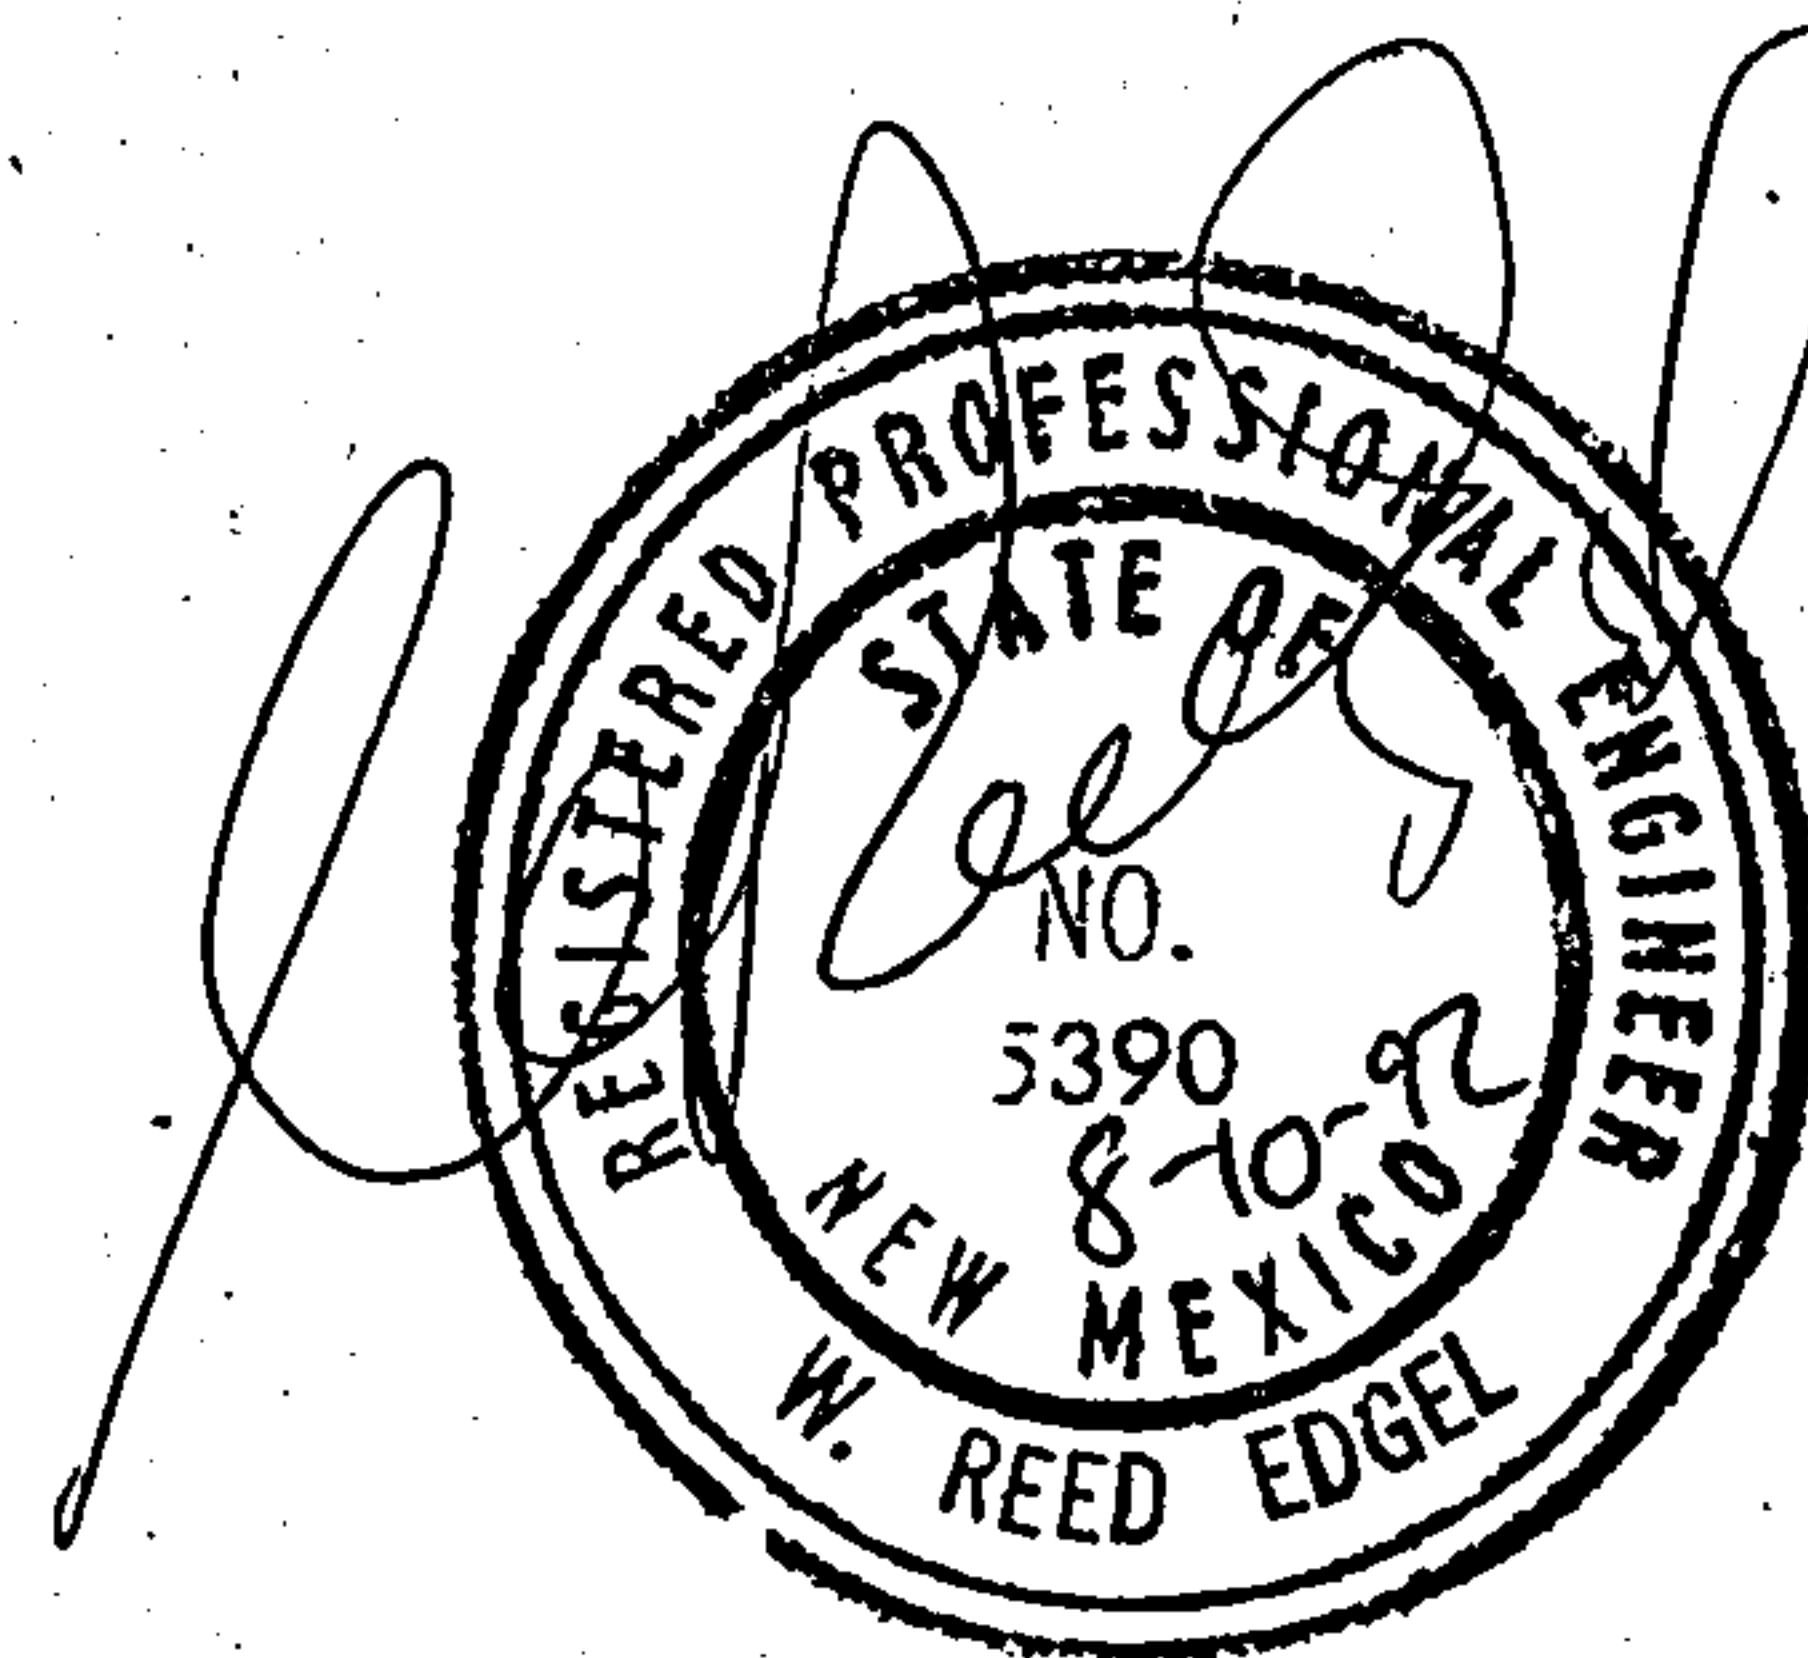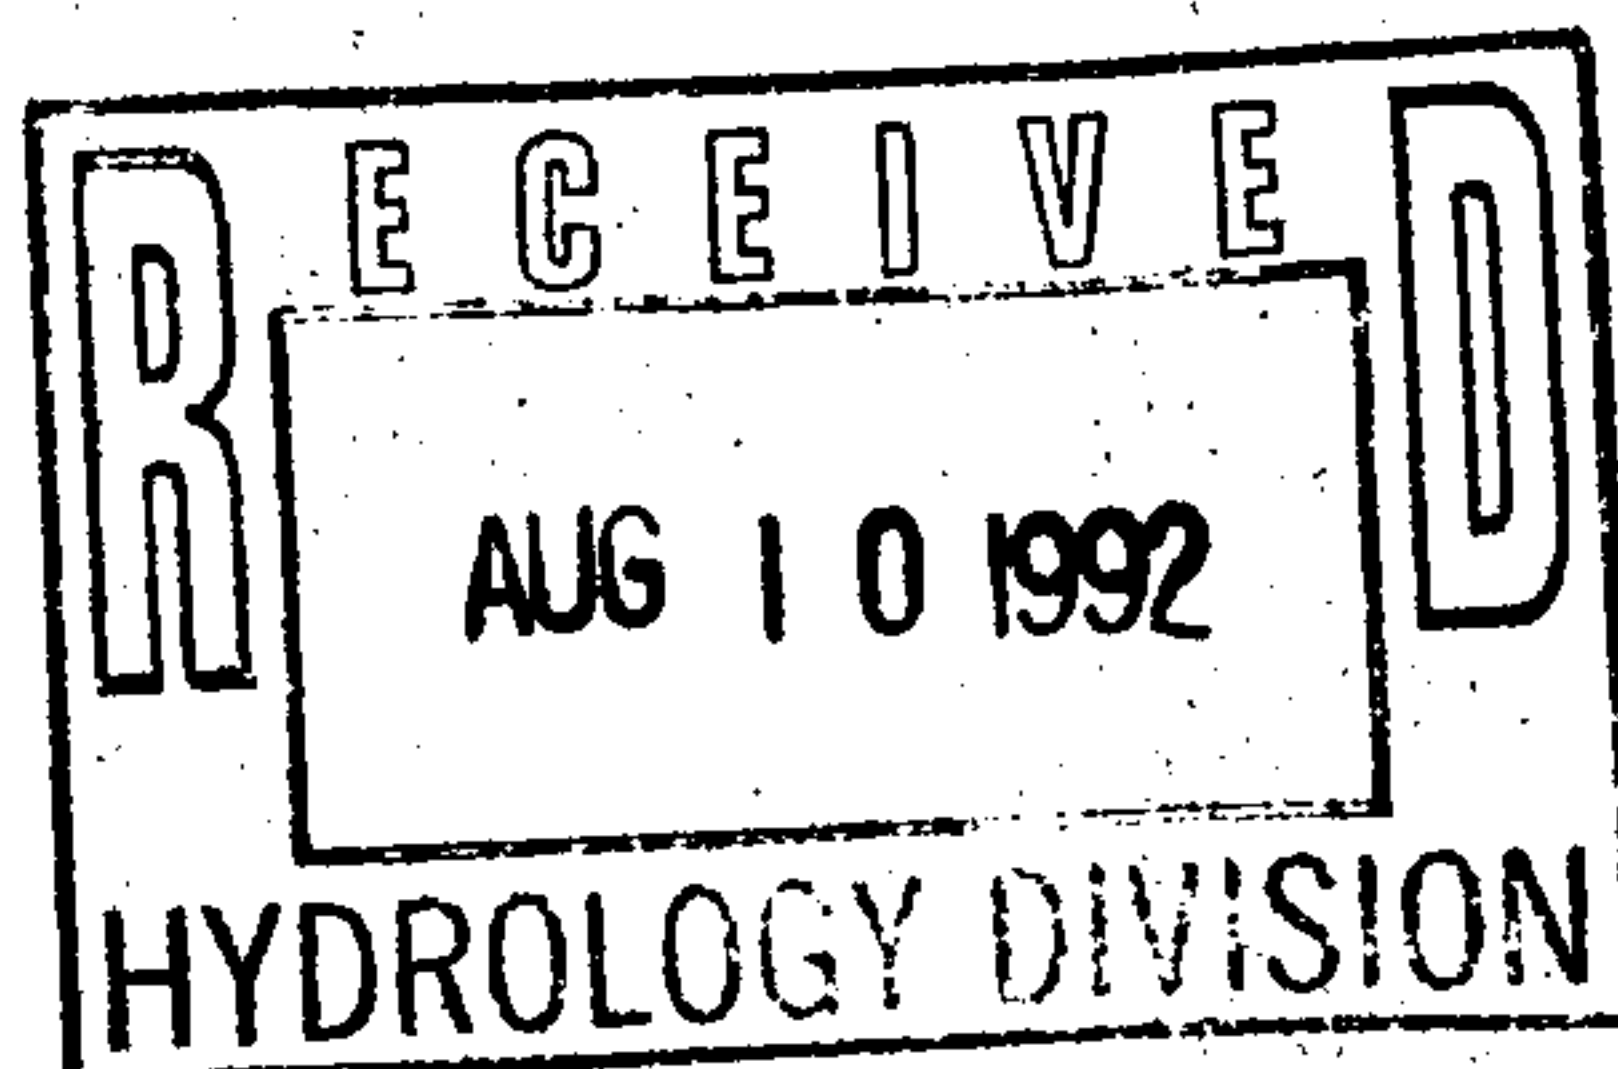



City of Albuquerque

P.O. BOX 1293 ALBUQUERQUE, NEW MEXICO 87103

August 21, 1992

W. Reed Edgel
Rodriguez & Associates
12800 San Juan NE
Albuquerque, NM 87123

RE: GRADING/PAVING PLAN FOR 1500 GIRARD BLVD. NE (J-16/D10) ENGINEER'S
STAMP DATED 8/10/92

Dear Mr. Edgel:

Based on the information provided on your August 10, 1992 submittal, the above referenced site is approved for Grading/Paving Permit.

Please be advised that after construction is completed, a request for inspection must be called in.

If I can be of further assistance, please feel free to contact me at 768-2667.

Sincerely,

Bernie J. Montoya
Bernie J. Montoya, C.E.
Engineering Assistant

BJM/ses/WPHYD3548

cc: Alan Martinez
File

PUBLIC WORKS DEPARTMENT