




- ① 8" CMU WALL WITH 2 COAT SYN. STUCCO SYSTEM. COLOR TO MATCH BLDG. BASE
- ② FINISH GRADE.
- ③ SLOPE STUCCO CAP.
- ④ 4-#4 BARS CONT. @ BOTTOM OF FOOTING #4 @ 16" O.C. ACROSS BOTTOM OF FOOTING.
- ⑤ 2-#5 BARS @ TOP KNOCK-OUT BLOCK BOND BEAM. CONTINUOUS. #5 BARS @ 32" O.C. VERTICAL. GROUT REINFORCED CELLS. DURALWALL @ 16" O.C. HORIZONTAL.
- ⑥ 1/2" EXPANSION JOINT MATERIAL.
- ⑦ 6" CONCRETE SLAB 4000 PSI 3/4" AGGREGATE WITH 6X6 - 10X10 WWM.
- ⑧ 6" CONCRETE APRON 4000 PSI 3/4" AGGREGATE WITH 6X6 10X10 WWM W/ TURNDOWN EDGE.
- ⑨ 6" CONCRETE FILLED PIPE IN DIA. 12" 4'-6" DEEP CONC. FOOTING. PAINT TO MATCH STUCCO FINISH.
- ⑩ ASPHALT PAVING
- ⑪ GROUT ALL CEMENT SLOE BELOW GRADE. TYPICAL.
- ⑫ 2" VENT TO 4F ABOVE TOP OF ENCLOSURE WALL. PROVIDE BREATHABLE VENT CAP.
- ⑬ PROVIDE PIN HOLE TO CATCH CANE BOLT IN OPEN POSITION

[illegible]

**MODULUS ARCHITECTS
AND LAND USE PLANNING**

8220 SAN PEDRO DR NE SUITE 520
ALBUQUERQUE, NEW MEXICO 87113
PHONE (505) 338-1499 • FAX (505) 338-1498

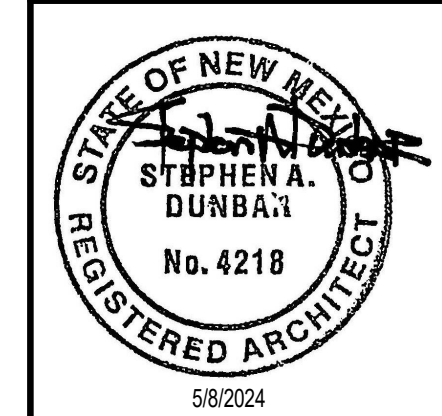

PROJECT TITLE EVENT CENTER SHELL		JOB NO. AIRTECH CT SE ALBUQUERQUE NM, 87106		DRAWN BY:	
PROJECT MANAGER		Project Number		SHEET TITLE SITE DETAILS	
DATE 5/8/2024		SHEET G5			
SCALE:					