TIE 24 RCP FROM NEW TYPE A INLET EX. SD MH EX. INV=5275.41 **EROSION CONTROL NOTES:** PROPOSED 24" INV IN=5277.41 1. CONTRACTOR IS RESPONSIBLE FOR OBTAINING A TOPSOIL DISTURBANCE PERMIT PRIOR TO BEGINNING WORK. REMOVE EX. TYP D INLET BUIL 1-TYPE A INLET PER 2. CONTRACTOR IS RESPONSIBLE FOR MAINTAINING RUN-OFF ON SITE DURING COA STD DWG #2201, 2202 TOP OF CURB=5284.00 FL=5283.46 GRATE=5283.10 3. CONTRACTOR IS RESPONSIBLE FOR CLEANING ALL SEDIMENT THAT GETS INTO EXISTING RIGHT-OF-WAY. 18" HDPE INV IN=5279.10 24" RCP NV OUT=5278.90 4. REPAIR OF DAMAGED FACILITIES AND CLEANUP OF SEDIMENT ACCUMULATIONS ON ADJACENT PROPERTIES AND IN PUBLIC FACILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR. INSTALL 1-18" NYLOPLAST INLINE DRAIN -GRATE=5287.00 5. ALL EXPOSED EARTH SURFACES MUST BE PROTECTED FROM WIND AND WATER EROSION PRIOR TO FINAL ACCEPTANCE OF ANY PROJECT. 12" HDPE INV OUT=5285.50 INSTALL 1-18" NYLOPLAST BEGIN 1'-2' RW _ DESIGN BY OTHERS INLINE DRAIN
GRATE=5287.00 CROWN ROAD NW 12" HDPE-N₩ OUT=5284.50 INSTALL 1-18" NYLOPLAST INLINE DRAIN GRATE=5286.00 12" HDPE INV OUT=5284.50 END 1'-2' RW
DESIGN BY OTHERS INSTALL 1-18" NYLOPLAST INLINE DRAIN -GRATE=5286.00 FF=5290.00 FP=5289.50 12" HDPE INV OUT=5284.50 INSTALL 1-18" NYLOPLAST INLINE DRAIN -GRATE=5289.50 12" HDPE INV OUT=5283.00 BUILD WATER HARVESTING POND TOP=5289,00 BOTTOM=5288.50 PROPOSED VOLUME=231 CU. FT. INSTALL 1-18" GRATE LGRATE=5290.75 (EMERGENCY OVERFLOW) 18" HDPE INV OUT = 5285.00
THE ULTIMATE DISCHARGE SHALL BE BUILD TEMPORARY RETENTION POND TOP=5291.00 BY 0.66 CFS PER ACRE BOTTOM=5289.50_ BUILD WATER HARVESTING POND REQUIRED VOLUME=9400 CU. FT. | PROPOSED VOLUME @ 5290.75=9518 CU. FT. | W/ROCK PLATTING W/3" ORIFACE PLATE 1:1 SLOPE MAX SEE DETAIL THIS SHEET SEE DETAIL THIS SHEET/ GRATE=5287.25 _TOP=5288.00 --N&W 12" HDPE INV IN=5282.35 BOTTOM=5285.50
PROPOSED VOLUME=1116 CU. FT.

N&W 12" HDPE INV IN=5282.35
18" HDPE INV OUT=5282.25 TRACT A-1-B

CAUTION:

EXISTING UTILITIES ARE NOT SHOWN.

IT SHALL BE THE SOLE RESPONSIBILITY


OF THE CONTRACTOR TO CONDUCT ALL

NECESSARY FIELD INVESTIGATIONS PRIOR

TO ANY EXCAVATION TO DETERMINE THE

ACTUAL LOCATION OF UTILITIES & OTHER

IMPROVEMENTS.

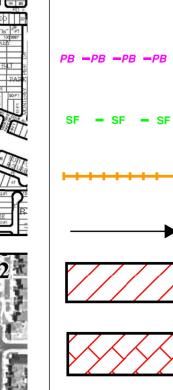


PROJECT PERIMETER & DISTURBED AREA SILT FENCE MULCH SOCKS FLOW DIRECTION STAGING AREA

<u>LEGEND</u>

EROSION AND SEDIMENT CONTROL PLAN



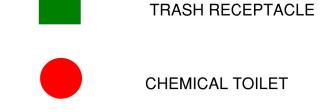






RIP RAP










PRESERVED VEGETATION

RIO GRANDE RIVER 2105_50; TIER II AND IMPAIRED RECEIVING WATERS: FOR PATHOGENS, TEMPERATURE, PCBs IN FISH TISSUE AND DISSOLVED OXYGEN

CRITERION "C"; RIO GRANDE SILVERY MINNOW AND CRITICAL HABITAT: YELLOW BILLED CUCKOO HABITATS ARE 4.0 MILES DOWNSTREAM BY WAY OF ALBUQUERQUE MS4.

35.2138, -106.6962 GPS LOCATION:



FIRM \overline{MAP} .

LEGAL DESCRIPTION: PARCEL A-1, FINELAND DEVELOPMENT

SITE WILL HAVE A SILT FENCE PERIMETER

WITH INLET PROTECTION AND ONSITE

PONDING AREAS. THE OFFSITE TEMPORARY

POND WILL BE CONSTRUCTED BY OTHERS.

STSGING AREA IS REPRESENTATIVE AND MAY

BE MOVED TO ACCOMODATE PROJECT.



C. DURKIN

Engineer Stamp

2/20/18

KIDZ ACADEMY

PROJECT TITLE

CITY, COUNTY, STATE

ALBUQUERQUE, BERNALILLO COUNTY, NM

02/20/2018 DATE

DRAWN BY

Inspections Plus, Inc.


Curb Storm Inlet Protection with Wattles









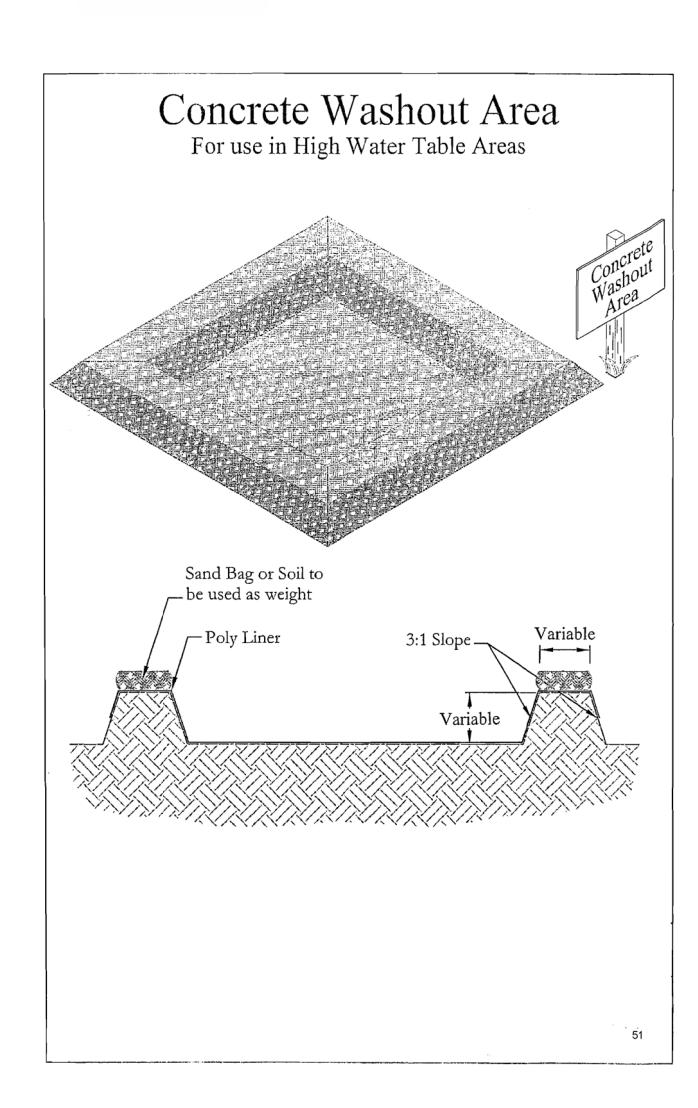

Inlet Filter Installation Instructions:




- Remove sediment, debris, ice and snow from the inlet grate surface and surrounding area.
- 2. Verify fit by placing filter over inlet grate to ensure that Inlet Filter extends at least one inch beyond the front and both curb ends. The overlap slows water


flow and starts filtering sediment and debris before water drops into the inlet.




- 3. Position the mat. Place Inlet Filter on grate with the net side down, flush to the back edge and extending beyond the grate opening on the front and both sides. The zip ties attach Inlet Filter to the inlet grate cover WITHOUT LIFTING THE GRATE COVER.
- 4. The filter material covering the inlet can be any material that will prevent the sediment and other foreign matter from entering the

storm drain system.

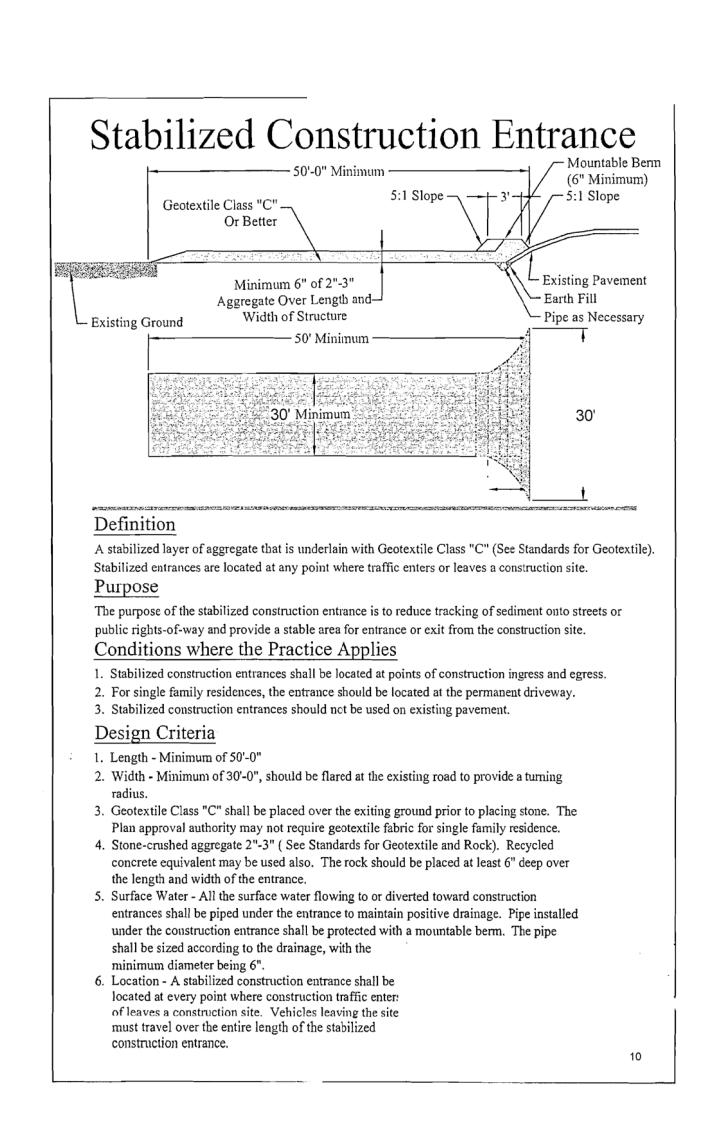


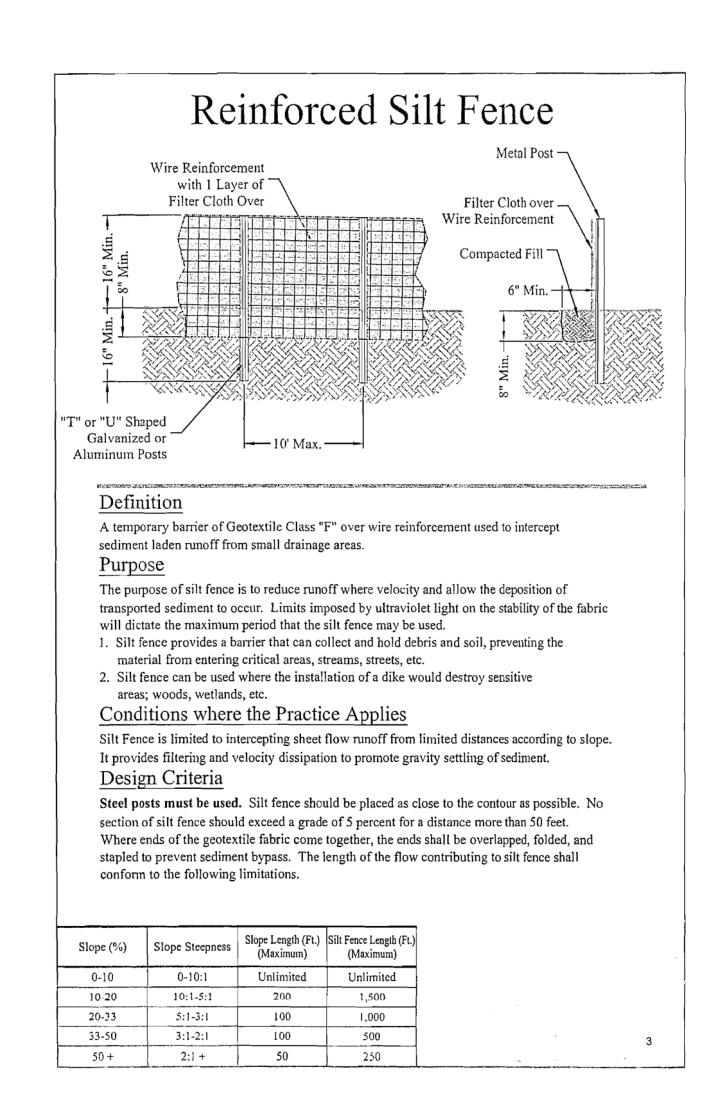

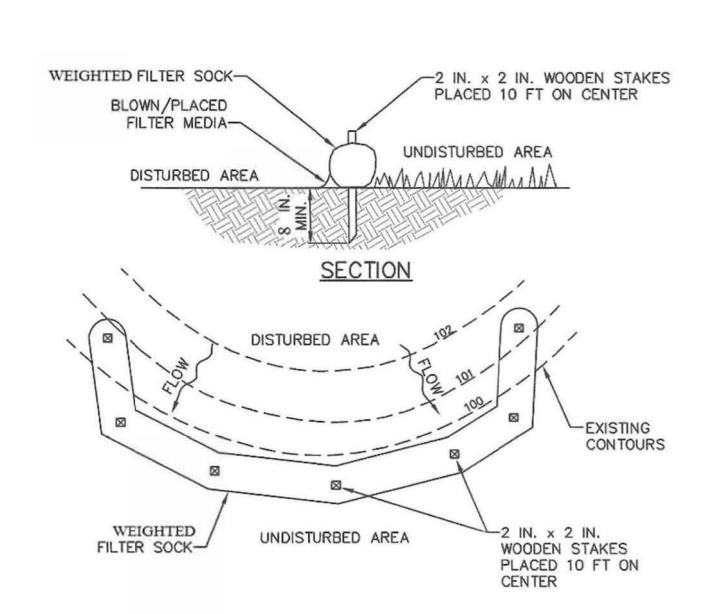

Erosion Control Notes

- 1. All perimeter erosion and sediment control measures shall be installed prior to the execution of any grading work and maintained by the grading contractor for the duration of the grading project. Failure to install and maintain erosion control is a violation of State Law and subject to fine.
- 2. The appropriate erosion control devise(s) shall be installed prior to the inception of any land disturbing activity and shall be properly maintained for construction activities.
- 3. All Erosion Control devices and their installation shall meet the standards prescribed in the current guidelines for storm water management for construction activities.
- 4. Sediment collected behind the sediment filters and silt fences shall be removed when sediment reaches on third the height of the barrier.
- 5. Inspection of erosion and sediment control and other protective measures are required once every 7 days from July 1st to October 31st and once every 14 days from November 1st to June 30th and after a precipitation event of ¼ inch or greater until the site is considered stabilized by the City. Inspection reports are to be kept by the person or entity authorized to direct construction activities on the site
- 6. Construction Site Entrance: The contractor shall construct as a minimum one stabilized construction entrance at the location shown on the plans. If additional ingress and egress to the construction site is required, the contractor shall coordinate with the construction manager the location of these additional stabilized construction entrances. Usage of non-stabilized for ingress and egress will not be permitted. The stabilized entrances shall be maintained in a condition which will prevent tracking or flowing of sediment onto public right-of-way and paved driving lanes. This may require periodic top dressing with additional stone as conditions warrant. Repair of the entrances or cleaning of the right-of-way and paved driving lanes that have been soiled shall be performed by the contractor at his own expense satisfactory to the construction manager. When necessary, vehicle wheels and tires shall be cleaned to remove sediment prior to entering onto public right-of-way and public streets. When washing is required, it shall be done on an area stabilized with crushed stone.
- 7. The contractor shall at his own expense, periodically water the site to control dust.
- 8. Sedimentation and erosion control measures shall be removed following construction or upon permanent stabilization of the disturbed and graded areas, whichever occurs last.
- 9. All disturbed areas that are not to be paved shall be re-seeded unless
- 10. The contractor shall deep the site clean at all times and control dust resulting from the earthwork operation. The contractor shall not track mud onto the public streets.

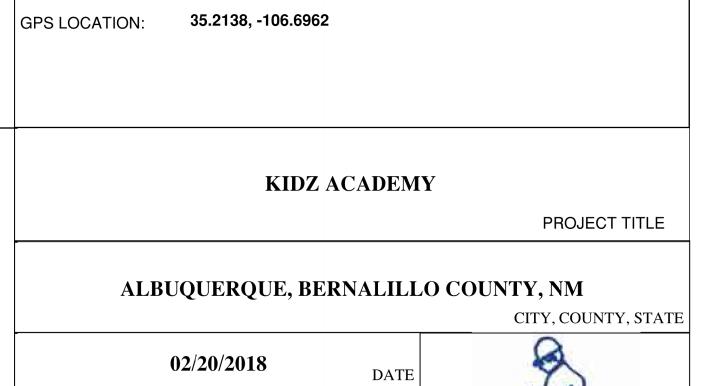

DRAWN BY

Inspections Plus, Inc.

C. DURKIN

RIO GRANDE RIVER 2105_50; TIER II AND IMPAIRED

CRITERION "C"; RIO GRANDE SILVERY MINNOW AND YELLOW BILLED CUCKOO HABITATS ARE 4.0 MILES

DOWNSTREAM BY WAY OF ALBUQUERQUE MS4.

RECEIVING WATERS: FOR PATHOGENS, TEMPERATURE, PCBs IN FISH

CRITICAL HABITAT:

2/20/18

Engineer Stamp

TISSUE AND DISSOLVED OXYGEN