

LEGEND					
	EROSION AND SEDIMENT CONTROL PLAN				
PB — PB — PB — PB	PROJECT PERIMETER & DISTURBED AREA				
SF - SF - SF	SILT FENCE				
	MULCH SOCKS				
>	FLOW DIRECTION				
	STAGING AREA				
	STABILIZED CONSTRUCTION ENTRANCE				
	TRASH RECEPTACLE				
	CHEMICAL TOILET				
	CONCRETE WASHOUT				
\bigcirc	RETENTION POND				
\sim	SWALE				
C	CHECK DAM				
\square	DROP INLET PROTECTION				
\otimes	OUTFALL				
S	S POSTING SIGN AND RAIN GAUGE				
	PRESERVED VEGETATION RETAINING WALL				

RECEIVING WATERS: RIO GRANDE 2105_50				
CRITERION "C"; RIO GRANDE SILVERY MINNOW AND CRITICAL HABITAT: YELLOW BILLED CUCKOO HABITATS ARE 10.6 MILES FROM THE PROJECT BY WAY OF ALBUQUERQUE MS\$				
GPS LOCATION: 35.1378, -106.4818				
WILD	ERNESS CAÑO			
PROJECT TITLE				
ALBUQUERQUE, BERNALILLO COUNTY, NM CITY, COUNTY, STATE				
01/22/18	DATE	R		
C. DURKIN	DRAWN BY	Inspections Plus loc.		

Inspections Plus, Inc.

1/22/17

Engineer Stamp

Curb Storm Inlet Protection with Wattles












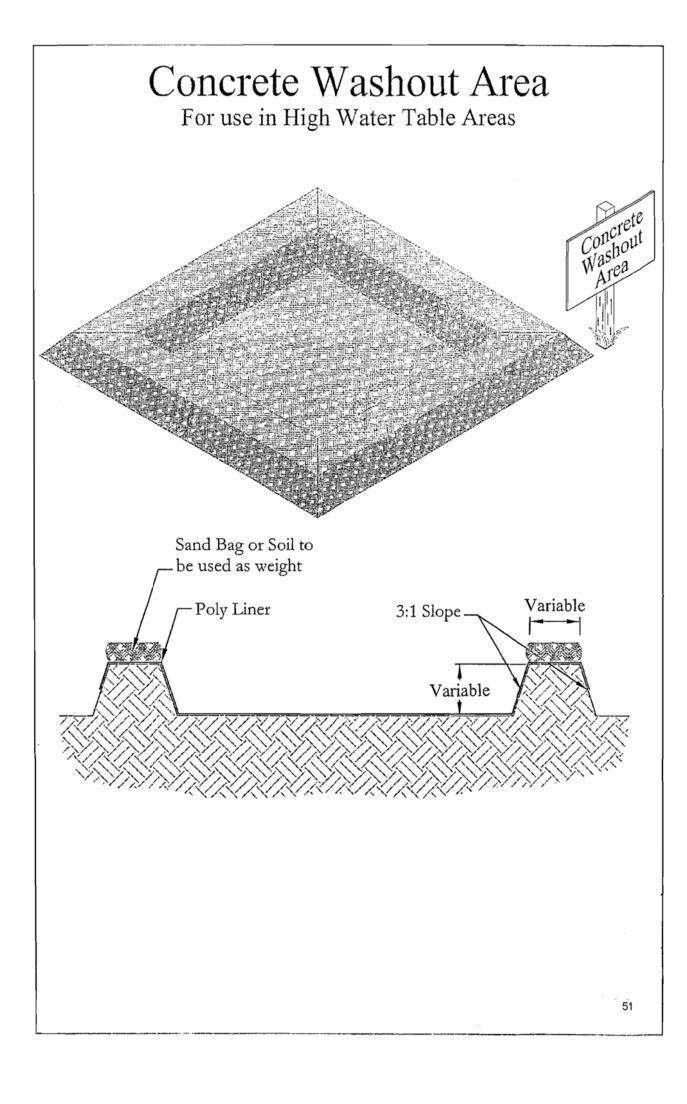

Inlet Filter Installation Instructions:




2. Verify fit by placing filter over inlet grate to ensure that Inlet Filter extends at least one inch beyond the front and both curb ends. The overlap slows water flow and starts filtering sediment and debris before water drops into the inlet.




3. Position the mat. Place Inlet Filter on grate with the net side down, flush to the back edge and extending beyond the grate opening on the front and both sides. The zip ties attach Inlet Filter to the inlet grate cover WITHOUT LIFTING THE GRATE COVER.


4. The filter material covering the inlet can be any material that will prevent the sediment and other foreign matter from entering the

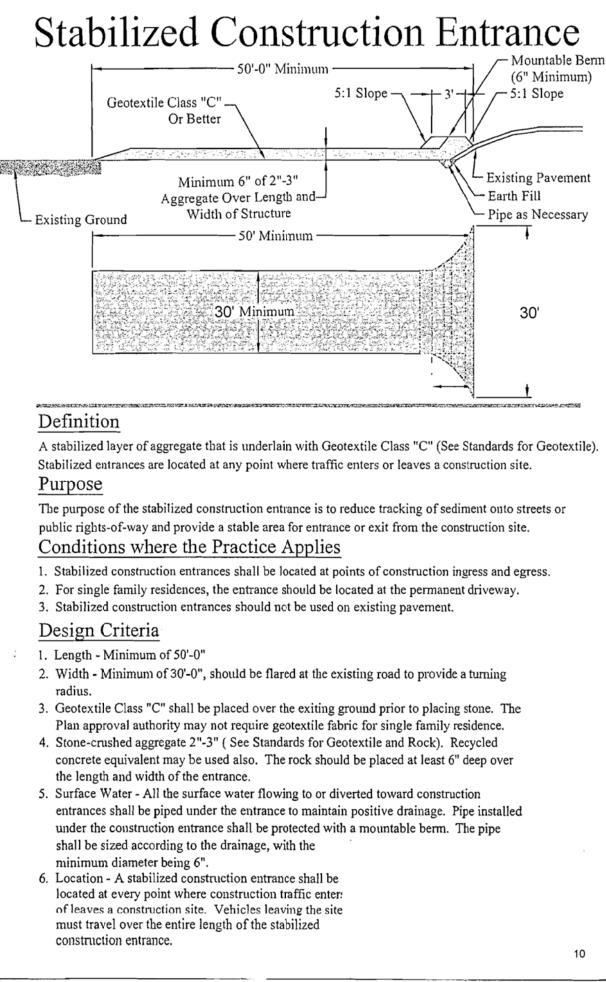


1. Remove sediment, debris, ice and snow from the inlet grate surface and surrounding area.

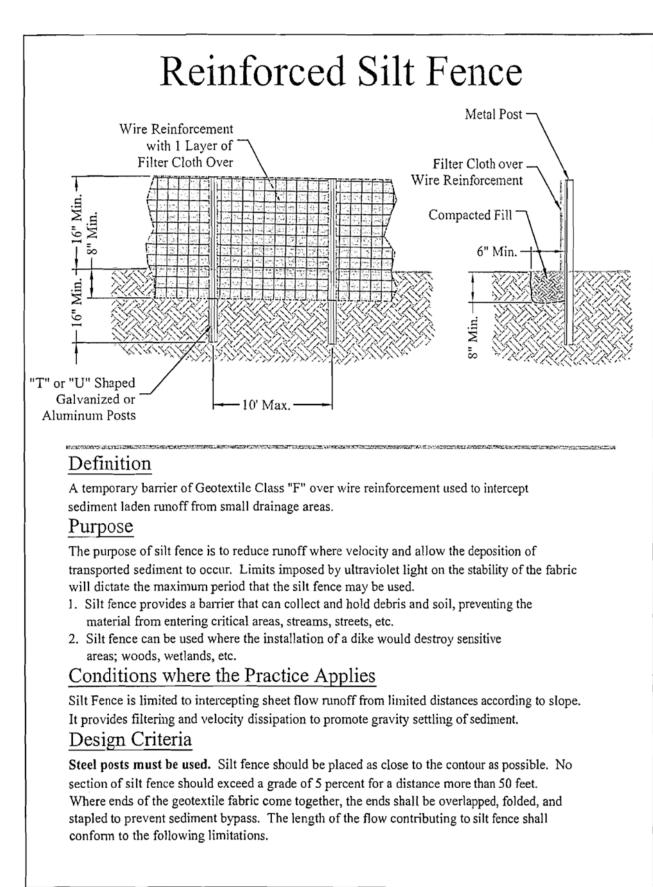

Slope (%)	Slope Steepness	Slope Length (Ft.) (Maximum)	Silt Fence Length (Ft.) (Maximum)	
0-10	0-10:1	Unlimited	Unlimited	
10-20	10:1-5:1	200	1,500	
20-33	5:1-3:1	100	1,000	
33-50	3:1-2:1	100	500	
50 +	2:1 +	50	250	



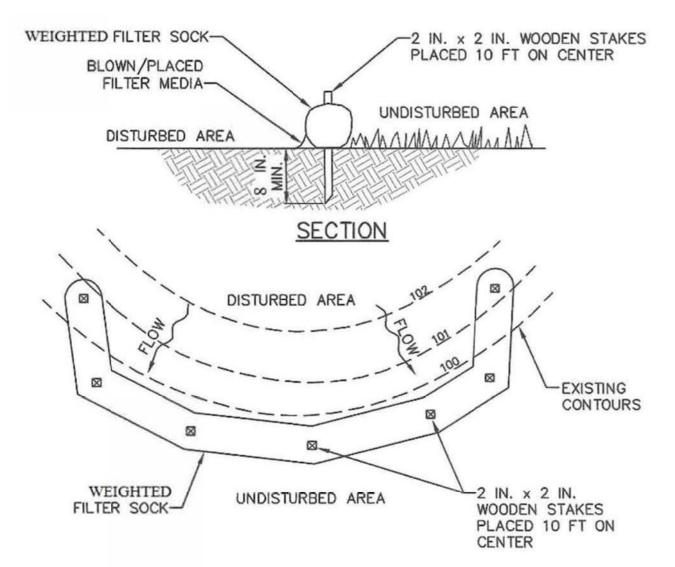



Erosion Control Notes

1. All perimeter erosion and sediment control measures shall be installed prior to the execution of any grading work and maintained by the grading contractor for the duration of the grading project. Failure to install and maintain erosion control is a violation of State Law and subject to fine.

2. The appropriate erosion control devise(s) shall be installed prior to the inception of any land disturbing activity and shall be properly maintained for construction activities.

3. All Erosion Control devices and their installation shall meet the standards prescribed in the current guidelines for storm water management for construction activities.

4. Sediment collected behind the sediment filters and silt fences shall be removed when sediment reaches on third the height of the barrier.

5. Inspection of erosion and sediment control and other protective measures are required once every 7 days from July 1st to October 31st and once every 14 days from November 1st to June 30th and after a precipitation event of ¹/₄ inch or greater until the site is considered stabilized by the City. Inspection reports are to be kept by the person or entity authorized to direct construction activities on the site

6. Construction Site Entrance: The contractor shall construct as a minimum one stabilized construction entrance at the location shown on the plans. If additional ingress and egress to the construction site is required, the contractor shall coordinate with the construction manager the location of these additional stabilized construction entrances. Usage of non-stabilized for ingress and egress will not be permitted. The stabilized entrances shall be maintained in a condition which will prevent tracking or flowing of sediment onto public right-of-way and paved driving lanes. This may require periodic top dressing with additional stone as conditions warrant. Repair of the entrances or cleaning of the right-of-way and paved driving lanes that have been soiled shall be performed by the contractor at his own expense satisfactory to the construction manager. When necessary, vehicle wheels and tires shall be cleaned to remove sediment prior to entering onto public right-of-way and public streets. When washing is required, it shall be done on an area stabilized with crushed stone.

7. The contractor shall at his own expense, periodically water the site to control dust.

8. Sedimentation and erosion control measures shall be removed following construction or upon permanent stabilization of the disturbed and graded areas, whichever occurs last.

9. All disturbed areas that are not to be paved shall be re-seeded unless noted otherwise.

10. The contractor shall deep the site clean at all times and control dust resulting from the earthwork operation. The contractor shall not track mud onto the public streets.

RECEIVING WATERS: RIO GRA	NDE 2105_50	
CRITICAL HABITAT: YELLOW BI FROM THE	LLED CUCKOO HAB PROJECT BY WAY O	ILVERY MINNOW AND ITATS ARE 10.6 MILES IF ALBUQUERQUE MS\$
GPS LOCATION: 35.1378, -106.4	1818	
WI	LDERNESS CAÑ	ŇON
		PROJECT TITLE
ALBUQUERQU	J E, BERNALILL	O COUNTY, NM CITY, COUNTY, STATE
01/22/18	DATE	P.
C. DURKIN		

DRAWN BY

Inspections Plus, Inc.

Engineer Stamp