



CALLE CUARTA RESIDENTIAL SUBDIVISION

TEMPORARY SEDIMENT AND EROSION CONTROL DRAWINGS

ALBUQUERQUE, BERNALILLO COUNTY, NEW MEXICO

DRAWING INDEX

- 1 COVER SHEET
- 2 PROJECT DETAILS
- 3 GENERAL NOTES
- 4 BEST MANAGEMENT PRACTICES
- 5 BEST MANAGEMENT PRACTICES
- 6 BEST MANAGEMENT PRACTICES
- 7 BEST MANAGEMENT PRACTICES
- 8 TЕСP
- 9 TЕСP

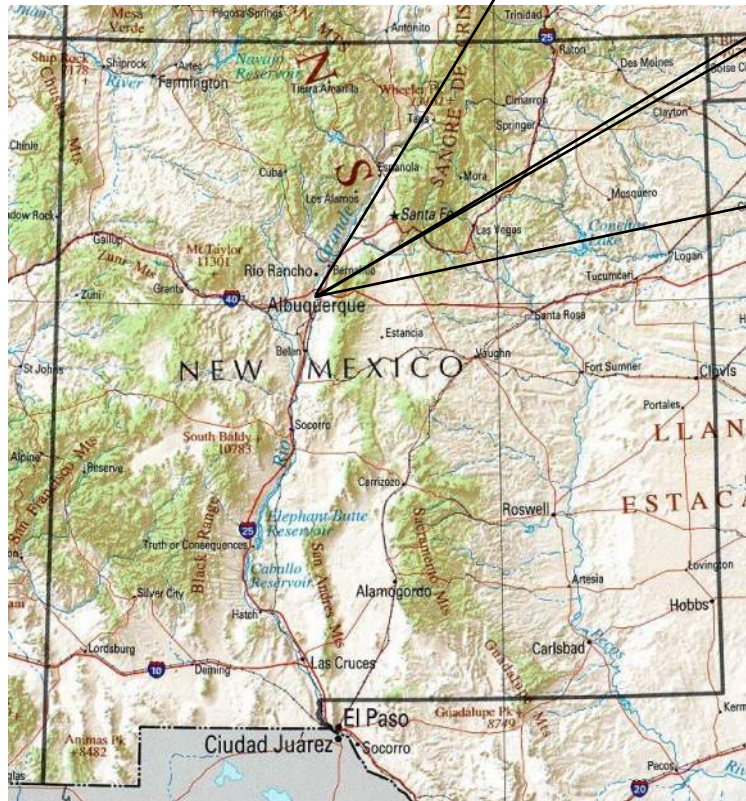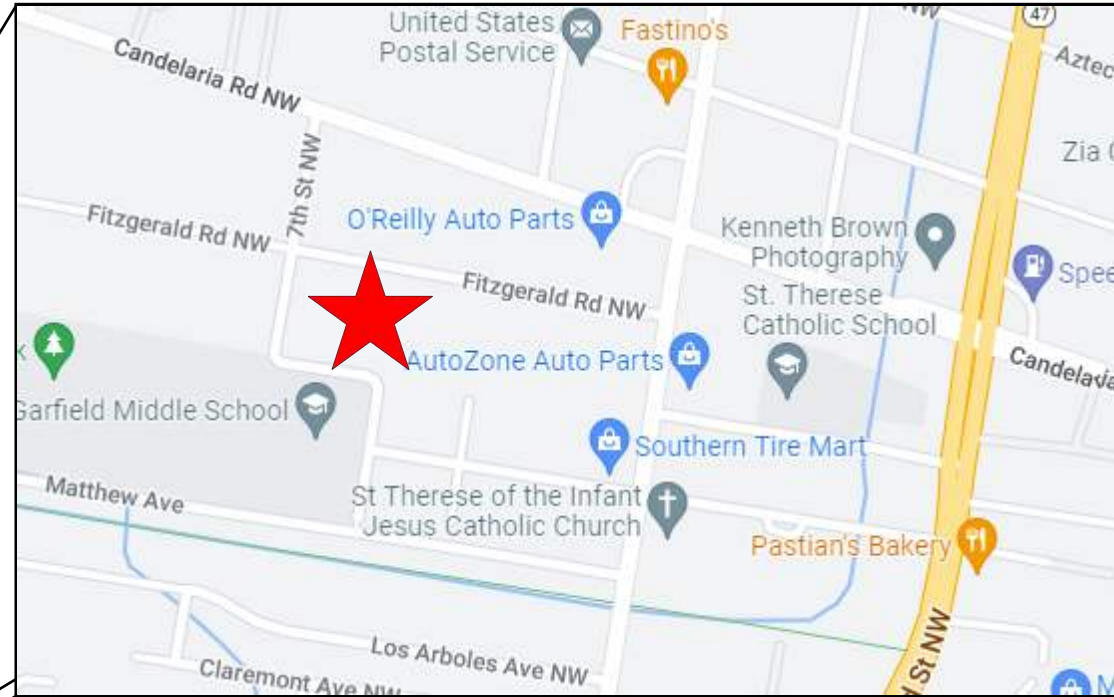

THE TЕСP IS A LIVING DOCUMENT.

UPDATE THE TЕСP WEEKLY TO REFLECT ONSITE CONDITIONS INCLUDING, BUT NOT LIMITED TO: BMP LOCATIONS (DATES INSTALLED/REMOVED), POLLUTANT SOURCES & POLLUTANT GENERATING ACTIVITIES.



SWPPP
Stormwater
Erosion Control
Reclamation
Seeding

www.e2rc.com | 505.867.4040



12/7/23					DATE
ECP AMENDED TO REMOVE MULTIFAMILY PROJECT					REVISION ITEM
1					#

**YES CALLE CUARTA TH, LLC
CALLE CUARTA RESIDENTIAL
SUBDIVISION
ALBUQUERQUE, NM**

DESIGNED BY:
K. FETTER, P.E.
DRAWN BY:
S. FETTER

SHEET:
1-COVER

PROJECT DETAILS

NPDES ID: NMR100632, NMR1005EN
 ADDRESS: FLORITA LANE NW, ALBUQUERQUE, NM 87107
 GPS COORDINATES: 35.118784, -106.645906
 TOTAL ACREAGE: 2.5
 ANTICIPATED DISTURBED ACREAGE: 2.5
 FIRST RECEIVING WATER: ALAMEDA DRAIN
 WATERS WITHIN ONE MILE OF PROJECT: ALAMEDA DRAIN, GRIEGOS LATERAL
 IMPAIRED/TIERED WATERS: NONE
 ENDANGERED SPECIES: CRITERION B
 SUPPORT ACTIVITIES: SEE SECTION 3.6 OF SWPPP NARRATIVE
 SOIL TYPE: SEE NRCS SOIL REPORT PROVIDED IN SWPPP BINDER
 TYPE PRE-CONSTRUCTION COVER: BARE, PRE-EXISTING PAVEMENT
 STABILIZATION MEASURES AND DEADLINES: SEE SECTION 6.0 OF SWPPP NARRATIVE
 REGULATING AUTHORITY: ENVIRONMENTAL PROTECTION AGENCY (EPA)

OPERATORS

PROPERTY OWNER:
 YES CALLE CUARTA TH, LLC
 901 PENNSYLVANIA ST. NE
 ALBUQUERQUE, NM 87110

OWNER CONTACT:
 PAGE OLLICE
 DIRECTOR OF CONSTRUCTION MANAGEMENT
 (505) 923-9607

GENERAL CONTRACTOR (GC):
 PAVILION CONSTRUCTION, LLC
 8900 WASHINGTON ST. NE
 ALBUQUERQUE, NM 87113

GC CONTACT:
 JARED MCCARN
 VICE PRESIDENT OF CONSTRUCTION
 (505) 346-0085

STORMWATER TEAM

SEE SECTION 2.0 OF THE SWPPP NARRATIVE FOR THE PROJECT'S STORMWATER TEAM, RESPONSIBILITIES AND CONTACT INFORMATION

SEQUENCE OF ACTIVITIES

PHASE I: SITE PREPARATION AND PRE – CONSTRUCTION


- 1.PRIOR TO BEGINNING EARTH DISTURBING ACTIVITIES, THE OPERATOR(S) WILL CLEARLY DEMARCATATE THE LIMITS OF DISTURBANCE WITH STAKES, RIBBONS, CONSTRUCTION FENCING, OR OTHER APPROPRIATE METHOD. THESE DEMARCATATIONS SHALL REMAIN VISIBLE FOR THE DURATION OF THE PROJECT.
- 2.THE INITIAL EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO EARTH DISTURBANCE. THE INITIAL CONTROL MEASURES MAY INCLUDE BUT ARE NOT LIMITED TO:
 - a.PERIMETER CONTROLS (E.G., SILT FENCE, WATTLES, CONSTRUCTION FENCE)
 - b.VEHICLE TRACKING PAD IF THE SITE ENTERS/EXITS ONTO A PAVED PUBLIC ROADWAY
 - c.NPDES NOTIFICATION POSTING
 - d.DESIGNATED STAGING AREA
 - e.ANCHORED SANILETS
 - f.DUMPSTERS
3. INSTALL THE TEMPORARY SEDIMENT BASINS AND SECONDARY EARTHEN BERMS DURING INITIAL GRADING ACTIVITIES. MAINTAIN THE SEDIMENT BASINS UNTIL PAVING ACTIVITIES BEGIN.

PHASE II: CONSTRUCTION ACTIVITIES

- 1.THE OPERATORS WILL MINIMIZE THE AREA DISTURBED AS MUCH AS FEASIBLY POSSIBLE.
- 2.ANY DISTURBED AREA IN WHICH CONSTRUCTION ACTIVITIES HAVE TEMPORARILY CEASED SHALL TEMPORARILY STABILIZED USING THE METHODS DESCRIBED IN SECTION 6.4 OF THE SWPPP NARRATIVE. SECTION 6.3 OF THE SWPPP NARRATIVE PROVIDES THE TEMPORARY STABILIZATION DEADLINES.
- 3.THE LOCATION OF SOME BMPS MAY REQUIRE ALTERATION IF DRAINAGE PATTERNS CHANGE DURING CONSTRUCTION. THE OPERATORS SHALL INSTALL ADDITIONAL BMPS OR UPGRADE BMPS IF NECESSARY.
- 4.IF CONCRETE IS USED ONSITE AND CONCRETE TRUCKS ARE UNABLE TO WASHOUT OFFSITE, THE OPERATORS WILL PROVIDE ONE OR MORE DESIGNATED CONCRETE WASHOUT AREAS. THE CONCRETE WASHOUTS MUST BE INSTALLED PRIOR TO CONCRETE USE ONSITE AND REMOVED ONLY AFTER CONCRETE WORK IS COMPLETE.

PHASE III: FINAL STABILIZATION AND CONSTRUCTION COMPLETION

- 1.IF APPLICABLE, REVEGETATION OR LANDSCAPING SHALL BE INITIATED IMMEDIATELY UPON KNOWING WORK IN A DISTURBED AREA HAS PERMANENTLY STOPPED AND THE AREA IS NOT COVERED BY PERMANENT STRUCTURES, UNLESS INFEASIBLE. SECTION 6.5 OF THE SWPPP NARRATIVE DISCUSSES PERMANENT STABILIZATION AND ASSOCIATED DEADLINES.
2. ALL RESIDENTIAL LOTS NOT STABILIZED WITH PERMANENT STRUCTURES WILL BE STABILIZATION WITH SOIL STABILIZER FROM COMPLETION UNTIL VERTICAL CONSTRUCTION BEGINS.
- 3.THE HOMEBUILDER PURCHASING ONE OR MORE RESIDENTIAL LOTS WILL SUBMITA A NOTICE OF INTENT (NOI) FOR ALL LOTS MANAGED AT LEAST 14 - CALENDAR DAYS PRIOR TO CONSTRUCTION.



12/7/23	12/7/23				DATE
PROPERTY OWNER UPDATED, NPDES ID UPDATED	PHASE III OF SEQ. OF ACTIVITIES UPDATED.				REVISION ITEM
1	2				#

YES CALLE CUARTA TH, LLC
 CALLE CUARTA RESIDENTIAL
 SUBDIVISION
 SWPPP NOTES



- SWPPP
- Stormwater
- Erosion Control
- Reclamation
- Seeding

DESIGNED BY:
 K. FETTER, P.E.
 DRAWN BY:
 S. FETTER

SHEET:
 2- GENERAL
 NOTES

GENERAL NOTES

THE NPDES COMPLIANCE SWPPP DRAWING AND ASSOCIATED DOCUMENTATION IS AND SHALL BE CONSIDERED A LIVING DOCUMENT ALLOWING FOR MODIFICATIONS AS SITE CONDITIONS CHANGE OR DICTATE.

ALL SITE FEATURES (EXISTING/PROPOSED GRADES, EXISTING CONSTRUCTION, FUTURE CONSTRUCTION, ETC.) SHOWN IS PER INFORMATION FROM OTHERS.

MINIMUM REQUIREMENTS TO FURTHER DEVELOP OR MODIFY THIS STORMWATER POLLUTION PREVENTION PLAN (SWPPP) DRAWING SHALL BE BASED ON THE CURRENT EDITION OF THE NEW MEXICO STATE HIGHWAY AND TRANSPORTATION DEPARTMENT (NMSHTD), NPDES LAW AND CITY OF ALBUQUERQUE ORDINANCE § 14-5-2-11.

ALL OPERATORS SHALL SUBMIT A NOTICE OF INTENT (NOI). THE NOI SHALL BE ACTIVE AND POSTED ON THE EPA'S WEBSITE PRIOR TO COMMENCING EARTH DISTURBING ACTIVITIES.

LOCATE TEMPORARY WASHOUT, ANCHORED TOILETS, CONSTRUCTION ENTRANCE AND PARKING, STAGING, REFUELING, TRASH CONTAINMENT AREA TO MINIMIZE SITE DISTURBANCE DURING CONSTRUCTION ACTIVITY.

THE OPERATOR IS REQUIRED TO REGULARLY PERFORM STREET SWEEPING AND CLEAN - UP MEASURES IN THE EVENT OF SEDIMENT TRACK - OUT.

THE FOLLOWING ARE STANDARD EROSION CONTROL REQUIREMENTS PER THE CITY OF ALBUQUERQUE STORMWATER QUALITY DEPARTMENT (JUNE 16, 2023):

ALL EROSION AND SEDIMENT CONTROL (ESC) WORK ON THESE PLANS, EXCEPT AS OTHERWISE STATED OR PROVIDED HEREON SHALL BE PERMITTED, CONSTRUCTED, INSPECTED, AND MAINTAINED IN ACCORDANCE WITH:

THE CITY ORDINANCE § 14-5-2-11, THE ESC ORDINANCE;
 THE EPA'S 2022 CONSTRUCTION GENERAL PERMIT (CGP); AND
 THE CITY OF ALBUQUERQUE CONSTRUCTION BMP MANUAL

ALL BEST MANAGEMENT PRACTICES (BMPs) MUST BE INSTALLED PRIOR TO BEGINNING ANY EARTH MOVING ACTIVITIES EXCEPT AS SPECIFIED HEREON IN THE PHASING PLAN. CONSTRUCTION OF EARTHEN BMPs SUCH AS SEDIMENT TRAPS, SEDIMENT BASINS, AND DIVERSION BERMS SHALL BE COMPLETED AND INSPECTED PRIOR TO ANY OTHER CONSTRUCTION OR EARTHWORK. SELF-INSPECTION IS REQUIRED AFTER INSTALLATION OF THE BMPs AND PRIOR TO BEGINNING CONSTRUCTION.

SEE SECTION 3.5 OF THE SWPPP NARRATIVE OR THE CONTRACTOR'S SCHEDULE FOR BMP SCHEDULING OR PHASING.

SELF-INSPECTIONS - IN ACCORDANCE WITH CITY ORDINANCE § 14-5-2-11(C)(1), AT A MINIMUM A ROUTINE SELF-INSPECTION IS REQUIRED TO REVIEW THE PROJECT FOR COMPLIANCE WITH THE CONSTRUCTION GENERAL PERMIT ONCE EVERY 14 DAYS AND AFTER ANY PRECIPITATION EVENT OF 1/4 INCH OR GREATER UNTIL THE SITE CONSTRUCTION HAS BEEN COMPLETED AND THE SITE DETERMINED AS STABILIZED BY THE CITY. REPORTS OF THESE INSPECTIONS SHALL BE KEPT BY THE PERSON OR ENTITY AUTHORIZED TO DIRECT THE CONSTRUCTION ACTIVITIES ON THE SITE AND MADE AVAILABLE UPON REQUEST.

CORRECTIVE ACTION REPORTS MUST BE KEPT BY THE PERSON OR ENTITY AUTHORIZED TO DIRECT THE CONSTRUCTION ACTIVITIES ON THE SITE AND MADE AVAILABLE UPON REQUEST.

FINAL STABILIZATION AND NOTICE OF TERMINATION (NOT) - IN ACCORDANCE WITH CITY ORDINANCE § 14-5-2-11(C)(1), SELF-INSPECTIONS MUST CONTINUE UNTIL THE SITE IS "DETERMINE AS STABILIZED BY THE CITY". THE PROPERTY OWNER/OPERATOR IS RESPONSIBLE FOR DETERMINING WHEN THE "CONDITIONS FOR TERMINATION CGP COVERAGE" PER CGP PART 8.2 ARE SATISFIED AND THE FOR FILING THEIR NOT WITH THE EPA. EACH OPERATOR MAY TERMINATE GCP COVERAGE ONLY IF ONE OR MORE OF THE CONDITIONS IN PART 8.2.1, 8.2.2 OR 8.2.3 HAS OCCURRED. AFTER FILING THE NOT WITH THE EPA, THE PROPERTY OWNER IS RESPONSIBLE FOR REQUESTING A DETERMINATION OF STABILIZATION FROM THE CITY.

WHEN DOING WORK IN THE CITY RIGHT-OF-WAY (E.G., SIDEWALK, DRIVE PADS, UTILITIES, ETC.) PREVENT SEDIMENT FROM ENTERING THE STREET. IF SEDIMENT IS PRESENT IN THE STREET, THE STREET SHOULD BE SWEEPED DAILY OR PRIOR TO A RAIN EVENT OR CONTRACTOR INDUCED WATER EVENT (E.G. CURB CUT OR WATER TEST).

WHEN CUTTING THE STREET FOR UTILITIES, THE SEDIMENT SHALL BE PLACED ON THE UPHILL SIDE OF THE STREET CUT AND THE AREA SWEEPED AFTER WORK IS COMPLETE. A WATTLE OR MULCH SOCK MAY BE PLACED AT THE TOE OF THE EXCAVATED DIRT PILE IF SITE CONSTRAINTS DO NOT ALLOW PLACING THE EXCAVATED DIRT ON THE UPHILL SIDE OF THE STREET CUT.

EROSION AND SEDIMENT CONTROL (ESC) PLANS MUST SHOW LONGITUDINAL STREET SLOPE AND STREET NAMES. ON STREETS WHERE THE LONGITUDINAL SLOPE IS STEEPER THAN 2.5%, WATTLES OR MULCH SOCKS OR J-HOOKED SILT FENCE SHALL BE SHOWN IN THE FRONT YARD SWALE OR ON THE SIDE OF THE STREET.



12/7/23				DATE
COA STANDARD REQUIREMENTS UPDATED				REVISION ITEM
1				#

YES CALLE CUARTA TH, LLC
 CALLE CUARTA RESIDENTIAL
 SUBDIVISION
 SWPPP NOTES




- SWPPP
- Stormwater
- Erosion Control
- Reclamation
- Seeding

www.e2rc.com | 505.867.4040


DESIGNED BY:
 K. FETTER, P.E.
 DRAWN BY:
 S. FETTER

SHEET:
 3 - GENERAL
 NOTES

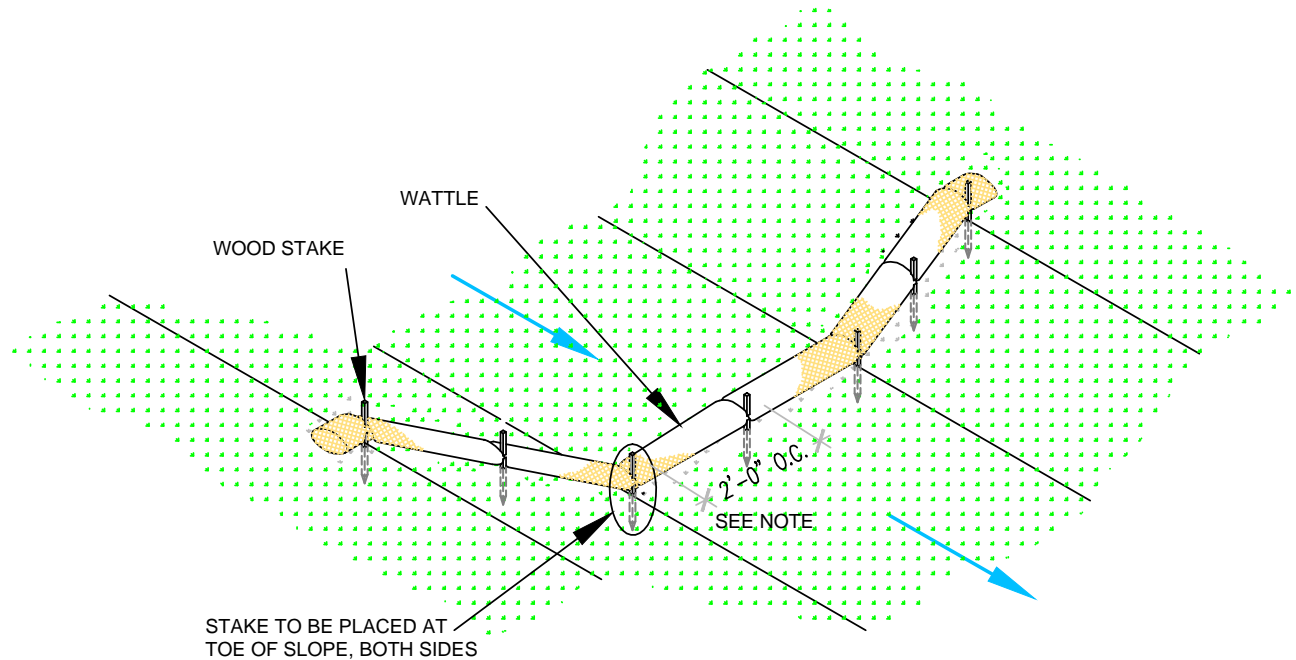




WATTLE WITHOUT BLANKET

NTS
2' FOR DRAWING ONLY. 8' MAX SPACING BETWEEN STAKES

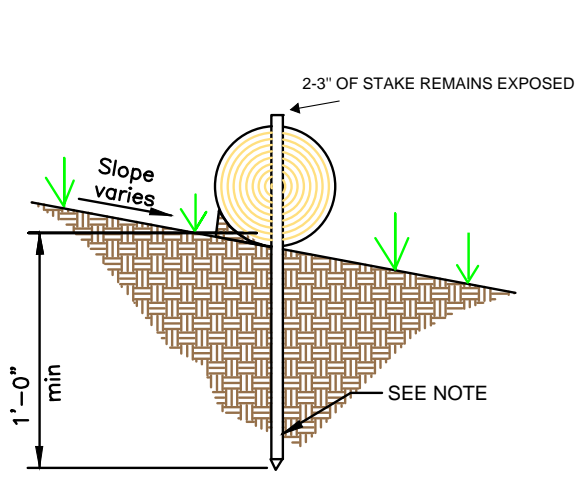

WATTLE

NTS
SECURE WATTLE WITH 18-24" STAKES EVERY 3-4' AND STAKES ON EACH END OF THE WATTLE.
DRIVE STAKES PERPENDICULAR TO THE SLOPE FACE AND THROUGH THE MIDDLE OF THE WATTLE LEAVING AT LEAST 2-3" OF THE STAKE ABOVE THE WATTLE.
VERTICAL SPACING DEPENDENT ON SLOPE GRADIENT.

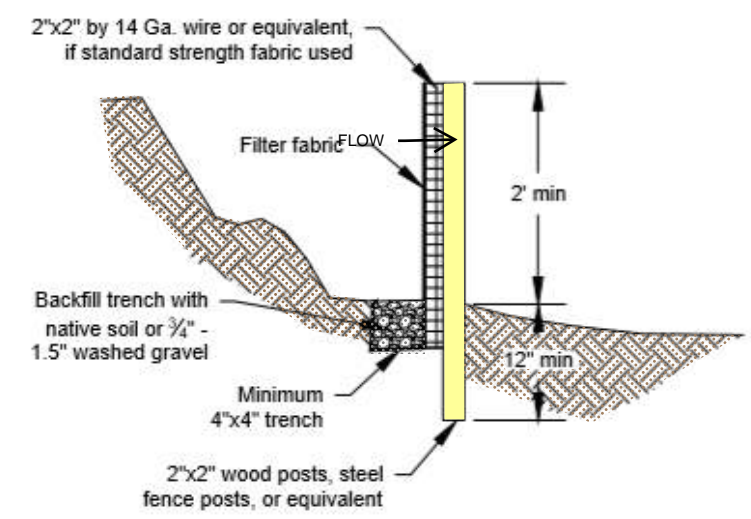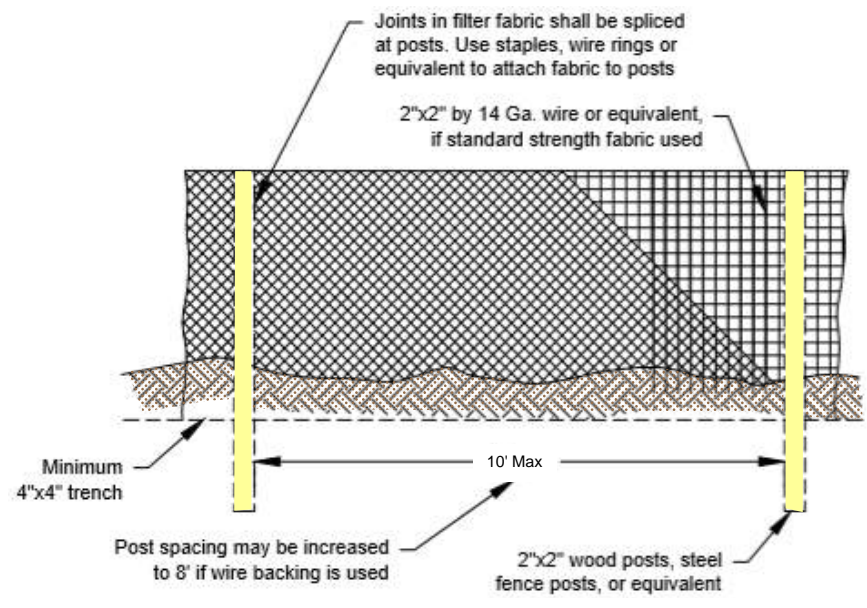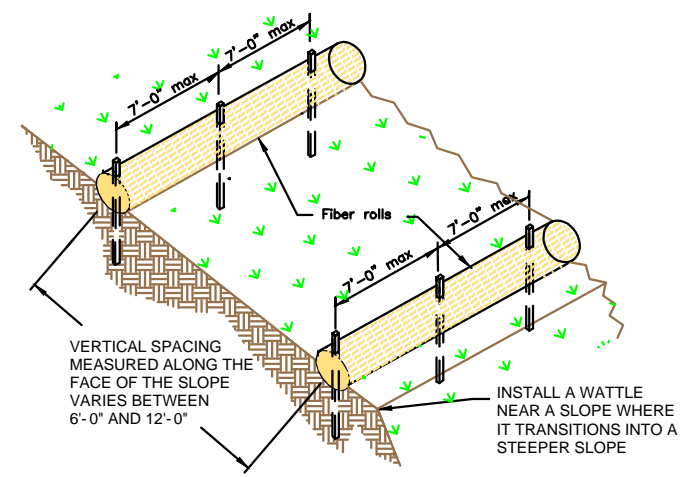

SILT FENCE

NTS
SILT FENCE IS TO BE PLACED PERPENDICULAR TO THE SLOPE OF THE SITE.
DIG A 4"X4" MINIMUM TRENCH UPSTREAM OF THE SILT FENCE. DRIVE STAKES AT LEAST 1' DEEP ON THE DOWNSTREAM EDGE.
RUN THE SILT FENCE ON THE INSIDE OF THE STAKES AND SECURE WITH HOG RINGS, WIRE, ZIP TIES OR STAPLES.
IF ONE CONTINUOUS PIECE OF FABRIC IS NOT AVAILABLE, OVERLAP THE FABRIC AT LEAST THE WIDTH OF THE STAKE AND SECURE WITH HOG RINGS, WIRE, ZIP TIES OR STAPLES.
COVER TRENCH WITH BACKFILLED COMPACTED SOIL, GRAVEL OR ROCK.



www.e2rc.com | 505.867.4040


- SWPPP
- Stormwater
- Erosion Control
- Reclamation
- Seeding

DATE	REVISION ITEM	#

YES CALLE CUARTA TH, LLC
SUBDIVISION
CALLE CUARTA RESIDENTIAL
BMP DETAILS

DESIGNED BY:
K. FETTER, P.E.
DRAWN BY:
S. FETTER

SHEET:

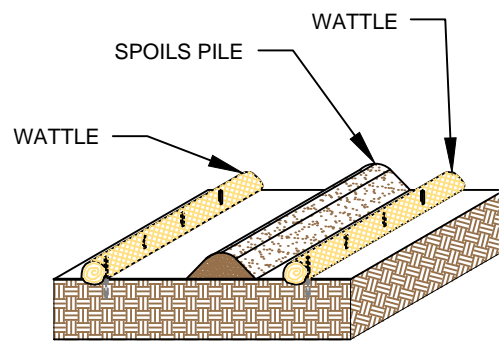

SPOILS PILE PROTECTION


NTS

PLACE WATTLES IN FUTURE LOCATIONS OF SPOILS STOCKPILES PRIOR TO CONSTRUCTION.

PLACE WATTLES CONTINUOUSLY ALONG THE EXTENT OF THE SPOILS STOCKPILE.

ANCHOR THE WATTLES USING A MINIMUM OF 1" X 2" X 18" WOODEN STAKES OR SAND BAGS.

ONCE/IF THE SPOILS STOCKPILE IS DEPLETED OR MOVED, REMOVE THE WATTLES AND REUSE THEM IN THE NEXT LOCATION.

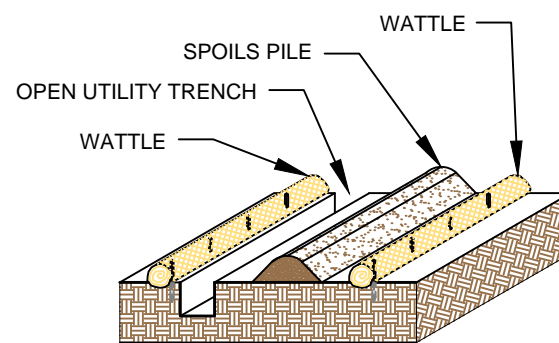

OPEN TRENCH SPOILS PILE PROTECTION


NTS

PLACE WATTLES CONTINUOUSLY ALONG THE EXTENT OF THE UTILITY TRENCH AND FUTURE LOCATION OF THE SPOILS STOCKPILE PRIOR TO EXCAVATION OF THE UTILITY.

WATTLES ARE TO REMAIN ANCHORED IN PLACE UNTIL THE UTILITY TRENCH IS BACKFILLED.

ANCHOR THE WATTLES USING A MINIMUM 1"X2"X18" WOODEN STAKE OR SANDBAGS.

ONCE THE TRANCH IS BACKFILLED, WATTLES MAY BE REMOVED AND REUSED IN THE NEXT SECTION OF EXCAVATION PROVIDED THEY ARE IN GOOD CONDITION.

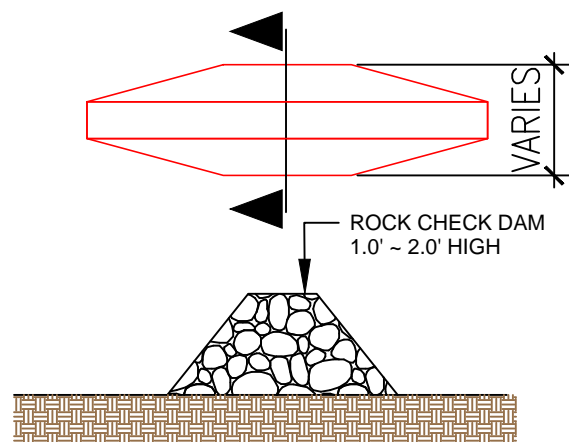


ROCK CHECK DAM

NTS

PLACE CHECK DAMS AT REGULARLY SPACED INTERVALS ALONG SWALE OR DRAINAGE DITCH.

HEIGHTS SHOULD ALLOW FOR POOLS TO DEVELOP UPSTREAM OF EACH CHECK DAM.

IF MULTIPLE DAMS ARE USED, THE TOP OF THE LOWER DAM SHOULD BE THE SAME HEIGHT AS THE ELEVATION AS THE TOE OF THE UPPER DAM.

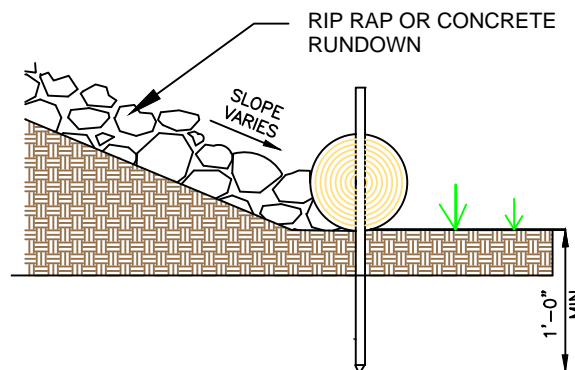

RUNDOWN DETAIL


NTS

8' MAX SPACING BETWEEN STAKES

PLACE WATTLES AT THE TOE OF SLOPE. THE RIP RAP OR CONCRETE RUNDOWN SHOULD ABUT THE WATTLE.

ANCHOR THE WATTLES WITH WOODEN STAKES. DRIVE THE STAKE A MINIMUM OF 12" INTO THE MIDDLE OF THE WATTLE AND SOIL UNDERNEATH.

2-3" OF THE WOODEN STAKE SHOULD BE PRESENT ABOVE THE WATTLE.

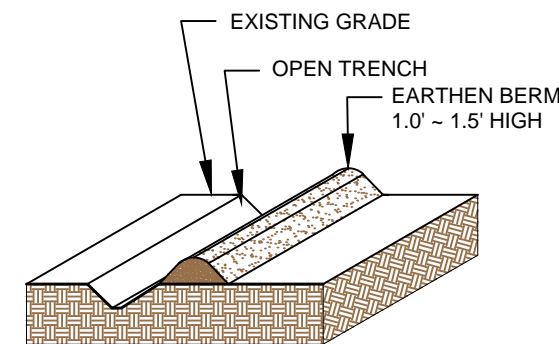


EARTHEN BERM

NTS

CONSTRUCT AN EARTHEN BERM DOWN HILL OF THE AREA TO BE CONTROLLED.

BERM SHOULD BE A MINIMUM 12" HIGH AND 12" WIDE.

USE EQUIPMENT TO COMPACT EARTHEN BERM BY ROLLING OVER BERM TO MINIMIZE SPREAD.



DATE	REVISION ITEM	#

YES CALLE CUARTA TH, LLC
CALLE CUARTA RESIDENTIAL
SUBDIVISION
BMP DETAILS




SWPPP
Stormwater
Erosion Control
Reclamation
Seeding

DESIGNED BY:
K. FETTER, P.E.
DRAWN BY:
S. FETTER


SHEET:

5

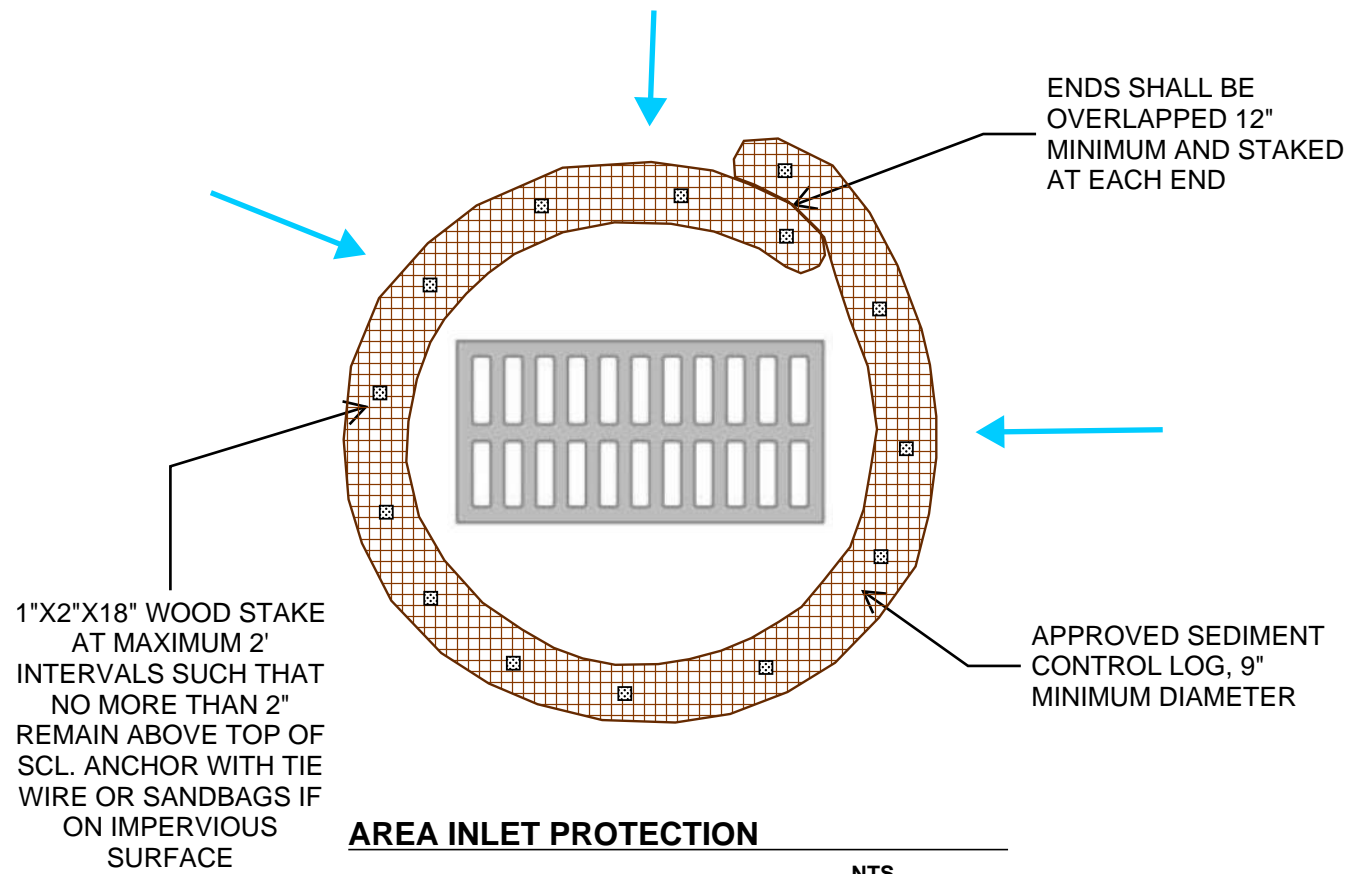

AREA INLET PROTECTION

NTS

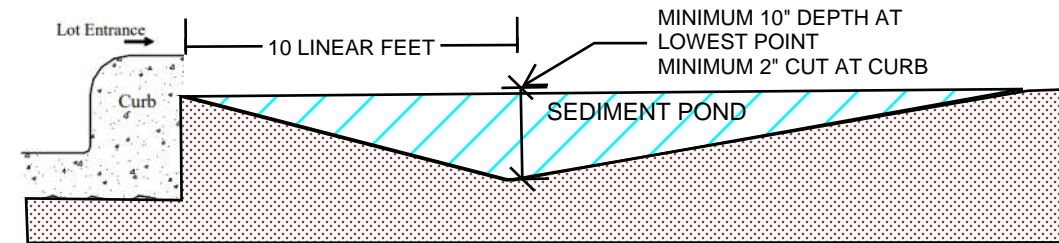

CUTBACK CURB

NTS

CUTBACK CURBS SHOULD TYPICALLY BE INSTALLED AT THE SITE ENTRANCE WHEN ACCESS IS NEEDED.

SOIL SHOULD BE CUT BACK FROM BEHIND THE CURB, SIDEWALK OR ROADWAY A MINIMUM 2" DOWN FROM THE TOP OF THE HARDSCAPE.

BRING THE SOIL BACK >10 FEET FT FROM THE HARDSCAPE TO FORM THE SEDIMENT TRAP.

THE LOWEST POINT OF THE SEDIMENT POND SHALL BE AT LEAST 10 INCHES.


IF THE HOUSE PAD HAS BEEN STABILIZED, THE DEPTH OF THE SEDIMENT POND MAY BE REDUCED TO 4 INCHES.

THE DEPTH AND LENGTH OF THE EXCAVATED AREA CAN BE INCREASED IF MORE STORAGE IS NEEDED.

INSPECT BMPs PRIOR TO FORCAST PRICIPITATION, DAILY DURING PRECIPITATION EVENTS, AFTER PRECIPITATION EVENTS AND THROUGH THE LIFE OF THE PROJECT.

MAINTAIN PROPER DEPTH AND LENGTH OF THE CUTBACK FOR THE DURATION OF THE PROJECT.

KEEP CUTBACK AREA CLEAN AND FREE OF TRASH AND DEBRIS.

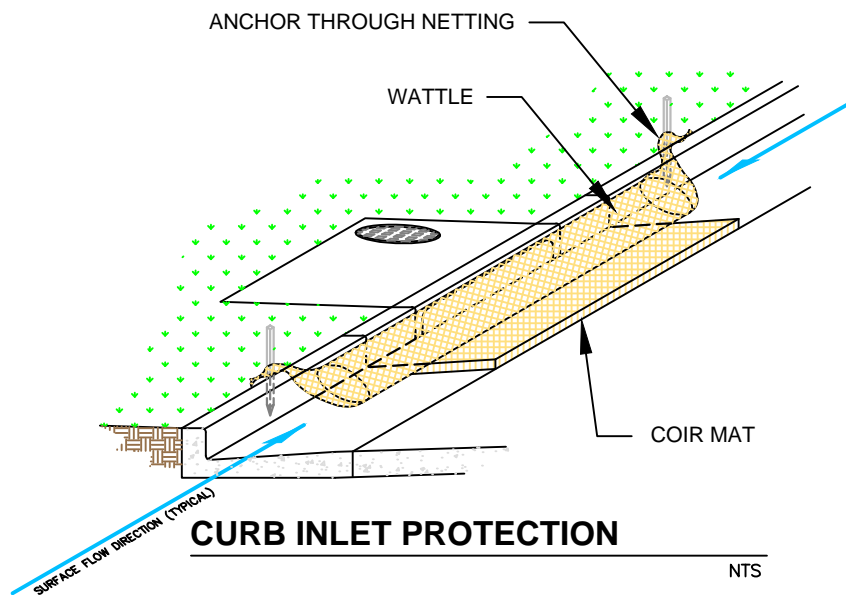

CURB INLET PROTECTION

NTS

THE MAT SHOULD EXTEND A MINIMUM OF 1" PAST ALL EDGES OF THE INLET. PLACE MAT AGAINST THE CURB INLET.

PLACE WATTLES ON TOP OF THE MAT CLOSEST TO THE INLET OPENING AND CURB.

THE MAXIMUM HEIGHT OF THE PROTECTIVE BARRIER MUST BE LOWER THAN THE TOP OF THE CURB OPENING. THIS ALLOWS OVERFLOW INTO THE INLET DURING LARGE PRECIPITATION EVENTS.

ANCHOR THE BARRIER NETTING OVER THE CURB WITH WOODEN STAKES IF ABLE. IF UNABLE TO DO THAT ANCHOR THE WATTLE WITH SAND BAGS ON EACH END.




- SWPPP
- Stormwater
- Erosion Control
- Reclamation
- Seeding

DATE	REVISION ITEM	#

YES CALLE CUARTA TH, LLC
 CALLE CUARTA RESIDENTIAL
 SUBDIVISION
 BMP DETAILS

DESIGNED BY:
 K. FETTER, P.E.
 DRAWN BY:
 S. FETTER

SHEET:

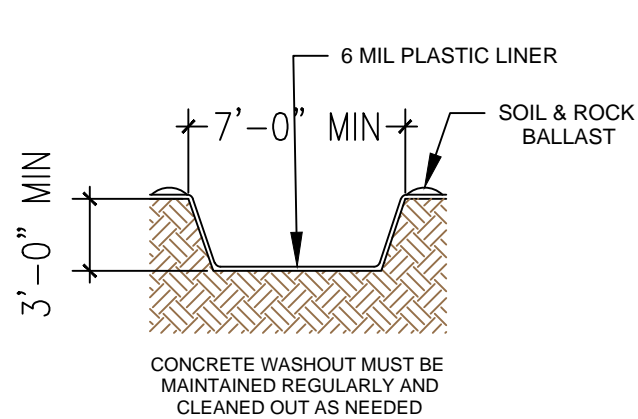

CONCRETE WASHOUT


NTS

LOCATE WASHOUT AT LEAST 50 FT FROM STORMDRAINS, OPEN DITCHES, WATER BODIES OR PROJECT PERIMETER. A SIGN SHOULD BE INSTALLED ADJACENTLY TO THE WASHOUT.

WASH OUT WASTE INTO THE WASHOUT WHERE THE CONCRETE CAN SET, BE BROKEN UP AND DISPOSED OF CORRECTLY.


DO NOT CREATE RUNOFF BY DRAINING WATER TO BERMED AREA OR BY COLLECTING THE WATER WASTE WHEN WASHING CONCRETE TO REMOVE PARTICLES AND EXPOSE THE AGGREGATE.

DO NOT WASH SWEEPINGS FROM EXPOSED AGGREGATE CONCRETE INTO THE STREET, STORMDRAIN SYSTEMS OR OFF THE PROJECT SITE.

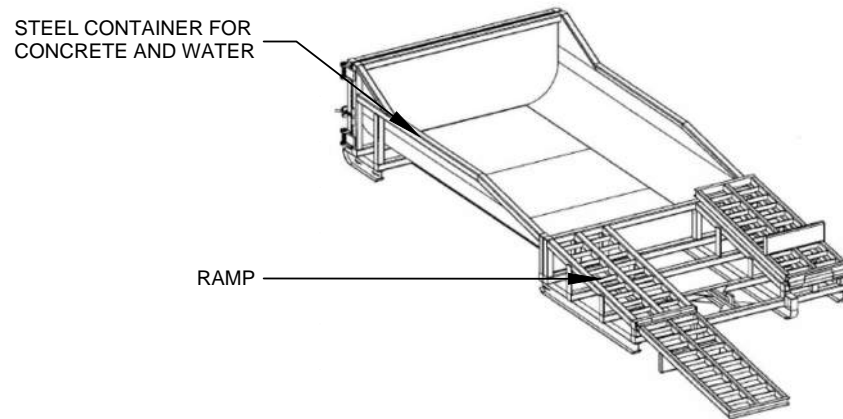

MODULAR CONCRETE WASHOUT


NTS



300 MM (12 IN), UNLESS OTHERWISE SPECIFIED BY A SOILS ENGINEER

SECTION B-B

NTS

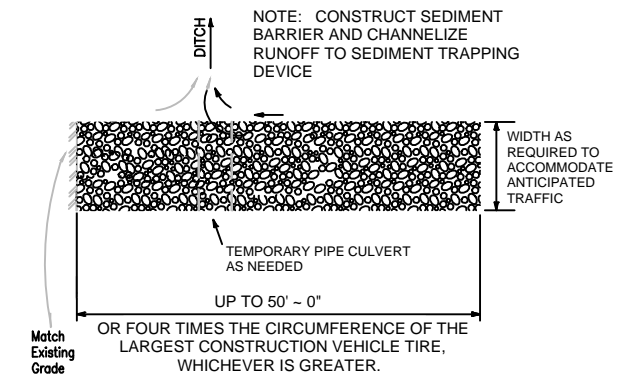

STABILIZED CONSTRUCTION ENTRANCE


NTS

CONSTRUCT THE ENTRANCE ON A LEVEL SURFACE WHERE AN UNPAVED ROAD MEETS A PAVED ROAD. TYPICALLY AT PROJECTS ACCESS AREA.

GRADE THE ENTRANCE TOWARD THE CONSTRUCTION SITE TO PREVENT RUNOFF.

INSPECT THE ENTRANCE TO KEEP TRASH AND DEBRIS OUT OF THE WAY.

AFTER PRECIPITATION EVENTS, INSPECT THE ENTRANCE FOR ANY REPAIRS THAT MAY BE NEEDED.




PORTABLE TOILET STAKING

NTS

PLACE THE PORTABLE TOILET ON LEVEL GROUND. A FLAT PAVED SURFACE IS BEST IF AVAILABLE.





DRIVE THE STAKES OVER THE SKIDS OF THE PORTABLE TOILET, AROUND ALL SIDES.

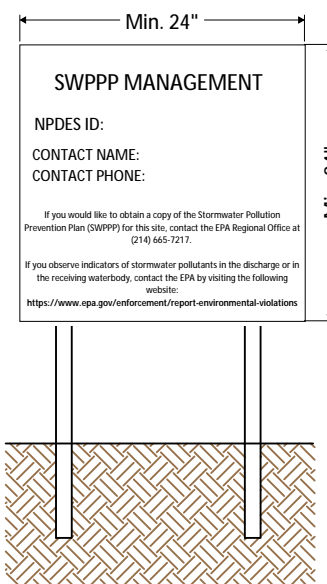

NPDES Permit must be positioned at the most active part of the project where it can be viewed by the public (e.g. project entrance).

NPDES POSTING BOARD

NTS

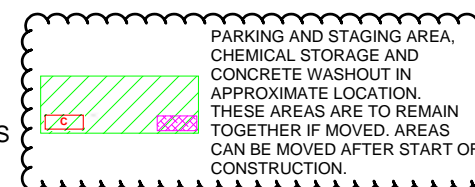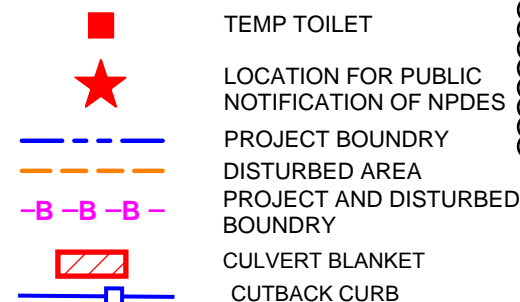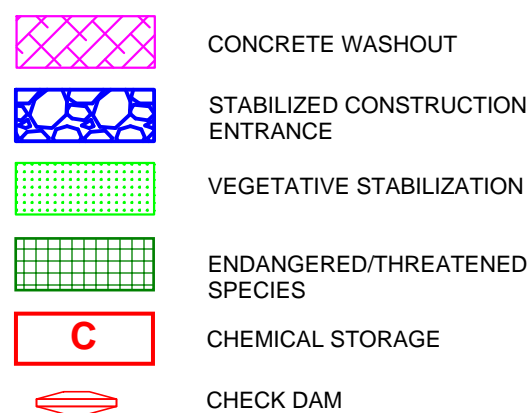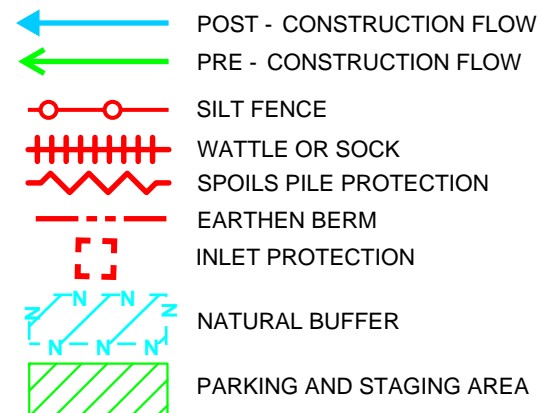

DRAWING KEY



SWPPP
Stormwater
Erosion Control
Reclamation
Seeding

www.e2rc.com | 505.867.4040

DATE	REVISION ITEM	#

YES CALLE CUARTA TH, LLC
SUBDIVISION
CALLE CUARTA RESIDENTIAL
BMP DETAILS



DESIGNED BY:
K. FETTER, P.E.
DRAWN BY:
S. FETTER

SHEET:

7




REVISION #	REVISION ITEM	DATE
1	FINAL STABILIZATION & NOT NOTES UPDATED	12/7/23

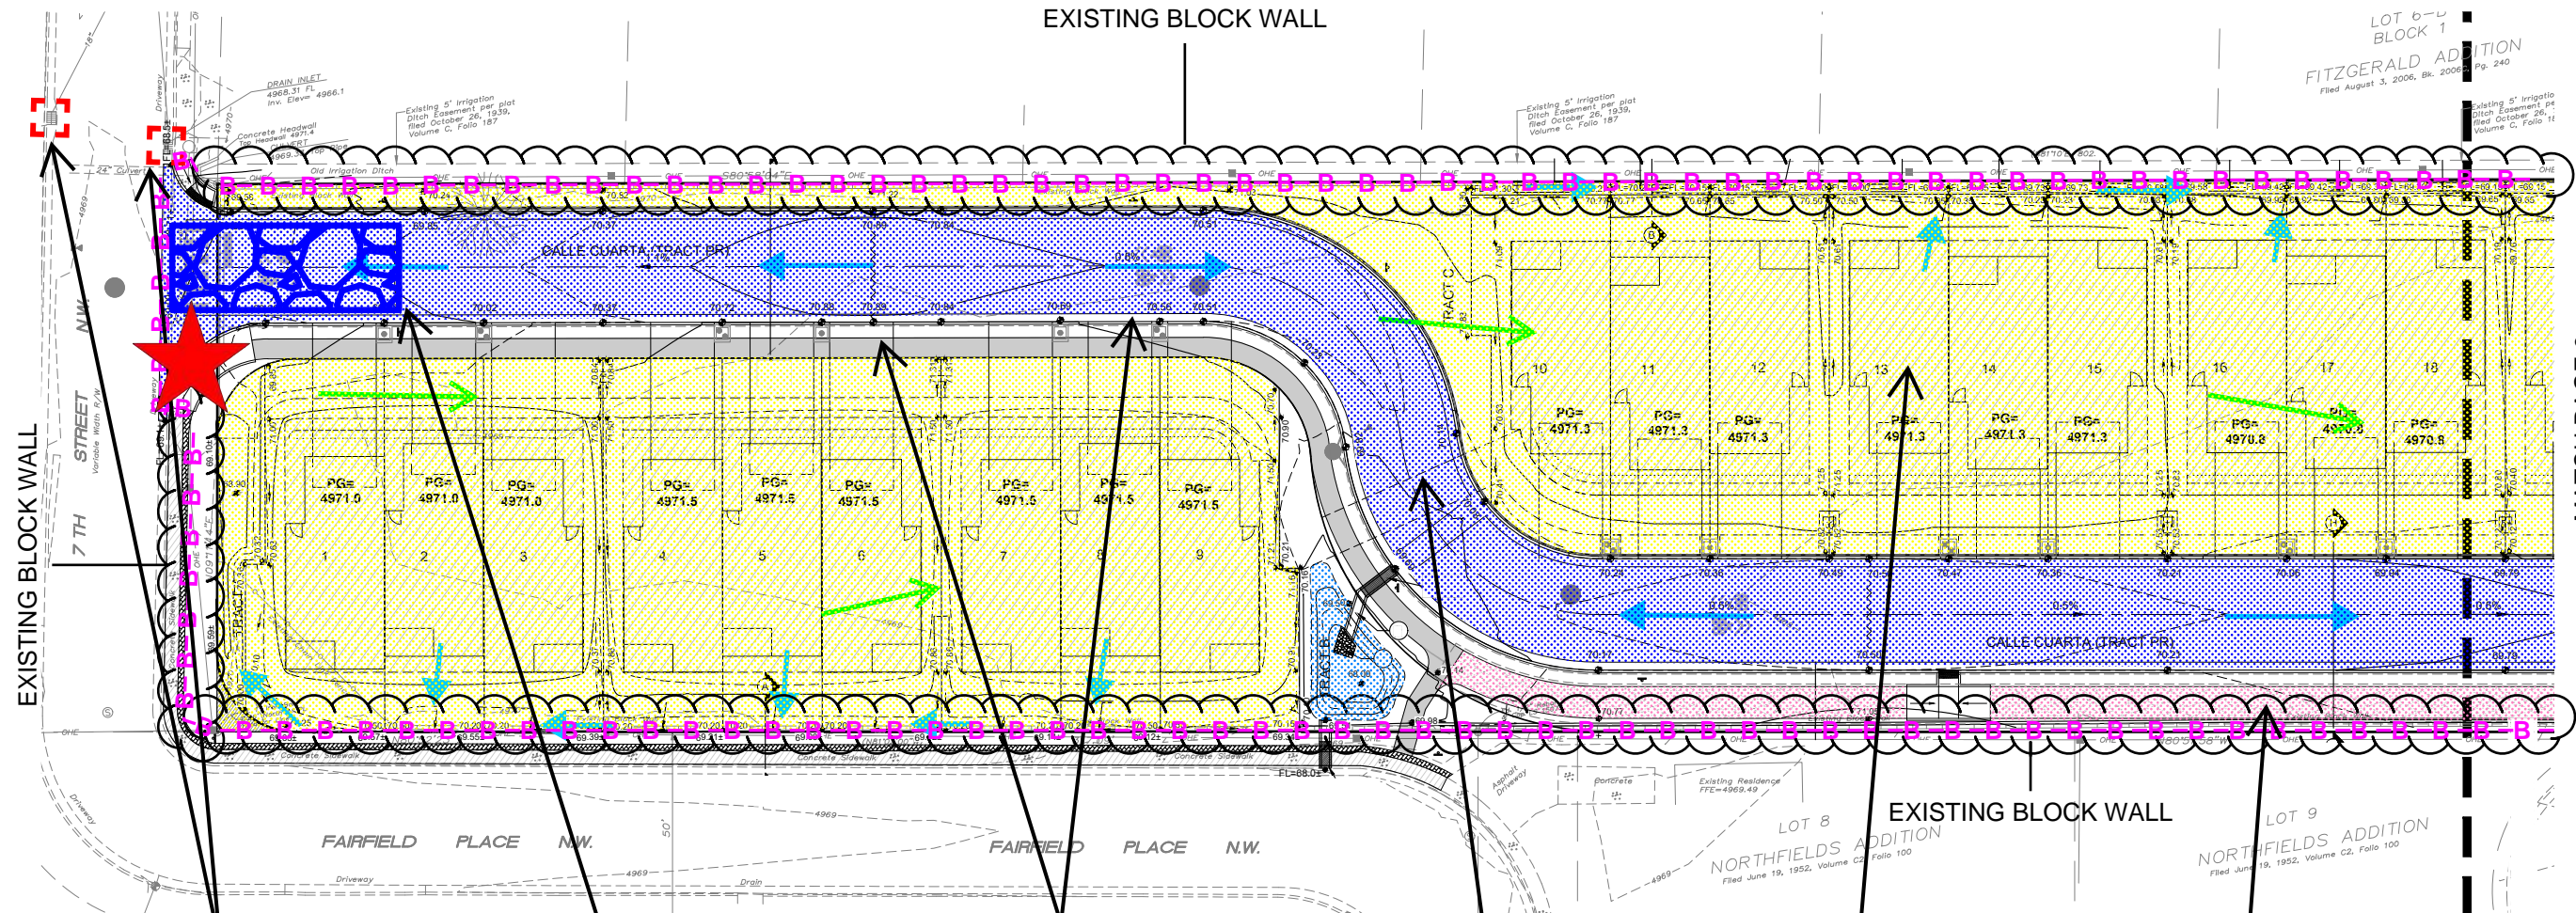


INLET PROTECTION

IMPLEMENTATION	
BMP INSTALL	BMP REMOVE
12/4/23	




STABILIZED CONSTRUCTION ENTRANCE

IMPLEMENTATION	
BMP INSTALL	BMP REMOVE




CONCRETE CURB, GUTTER, SIDEWALK

FINAL STABILIZATION




ASPHALT PAVING

FINAL STABILIZATION



SOIL STABILIZER

FINAL STABILIZATION



CRUSHER FINE PATH

FINAL STABILIZATION


COA FUGITIVE DUST CONTROL:
THE OPERATORS WILL INSTALL A SECURITY FENCE WITH WIND SCREEN ATTACHED FOR FUGITIVE DUST MITIGATION.

FINAL STABILIZATION AND N.O.T. REQUIREMENTS:

ALL LOTS NOT STABILIZED WITH PERMANENT STRUCTURES REQUIRE TEMPORARY STABILIZATION FROM COMPLETION UNTIL VERTICAL CONSTRUCTION BEGINS. ALL TRACTS NOT STABILIZED WITH PERMANENT STABILIZATION STRUCTURES REQUIRE VEGETATIVE STABILIZATION TO MEET CGP FINAL STABILIZATION CRITERIA.

YES CALLE CUARTA TH, LLC IS SELLING THE INDIVIDUAL LOTS. FOR INDIVIDUAL LOTS, THE PURCHASING HOMEBUILDER WILL SUBMIT A NOTICE OF INTENT (NOI) FOR ALL LOTS MANAGED. YES CALLE CUARTA TH, LLC WILL SUBMIT ITS NOTICE OF TERMINATION AFTER ALL LOTS ARE SOLD AND NPDES PERMIT LIABILITY TRANSFERRED TO THE HOMEBUILDER. REFER TO THE REQUIREMENTS FOR SITES DISTURBING LESS THAN ONE ACRE BUT PART OF A 'COMMON PLAN OF DEVELOPMENT'.

YES CALLE CUARTA, LLC IS RESPONSIBLE FOR SWPPP MAINTENANCE UNTIL HOMEBUILDER(S) SUBMIT AN NOI FOR ITS LOTS AND RESPONSIBILITY TRANSFERRED.



- SWPPP
- Stormwater
- Erosion Control
- Reclamation
- Seeding

YES CALLE CUARTA TH, LLC
CALLE CUARTA RESIDENTIAL
SUBDIVISION
TESCP - PWO


DESIGNED BY:
K. FETTER, P.E.
DRAWN BY:
S. FETTER

SHEET:

8

EXISTING BLOCK WALL

PER CONTRACT DRAWINGS, DRAINAGE POND TO BE STABILIZED FOR DRAINAGE POND SEEDING AND SLOPE STABILIZATION (APWA SECTION 1013) OR PER LANDSCAPE PLAN.

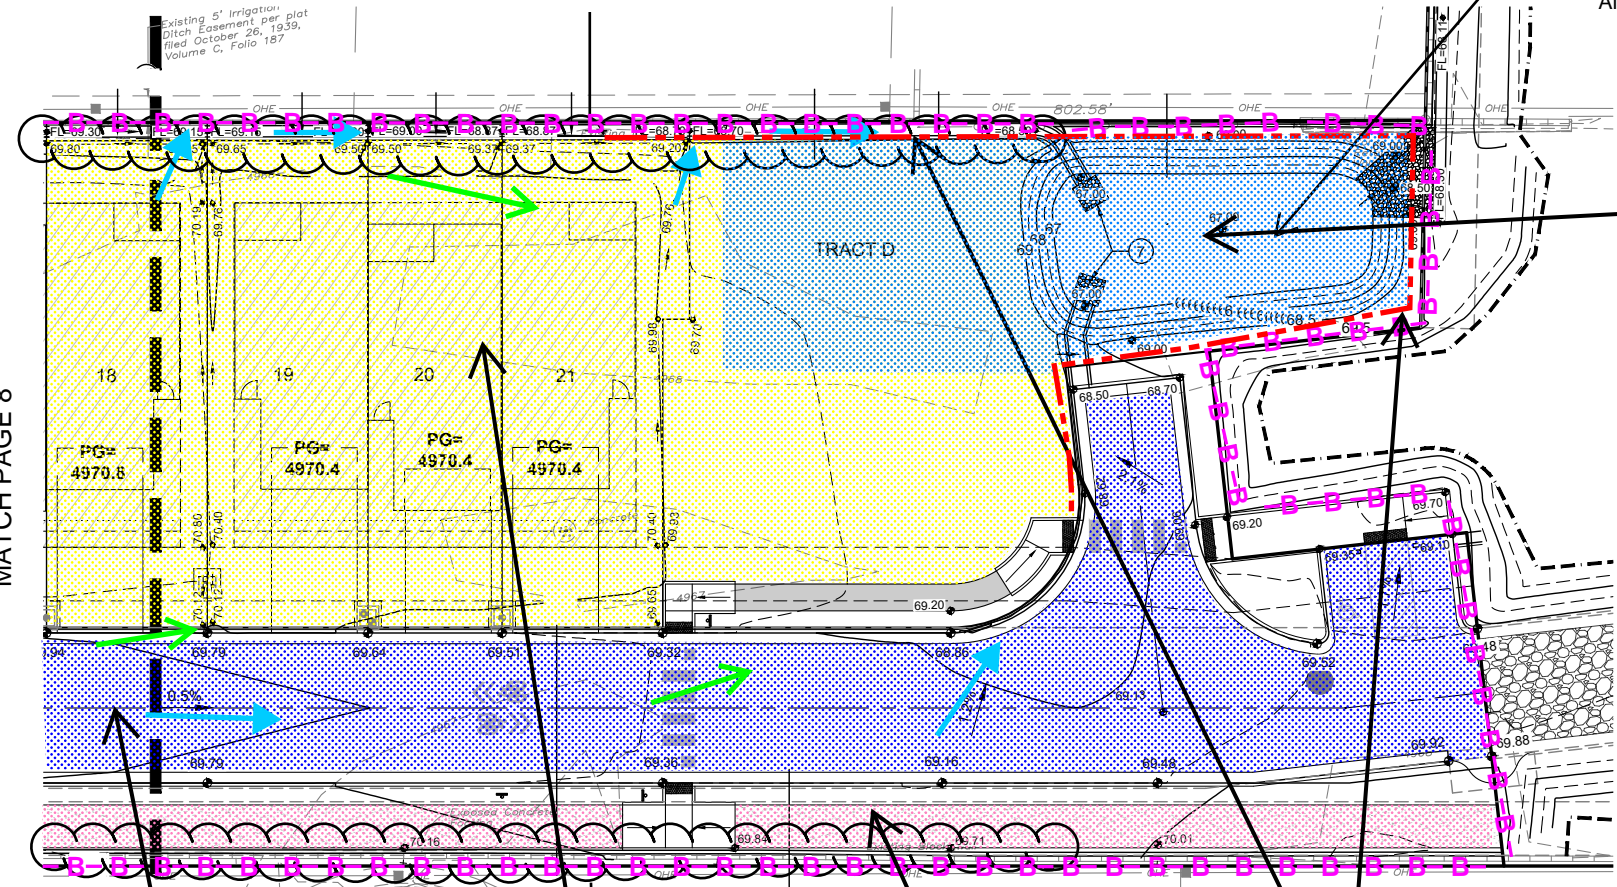

SEDIMENT BASIN:


USE THE BASIN FILL TO CONSTRUCT A PERIMETER EARTHEN BERM AROUND BASIN 'C'. RETURN THE BERM MATERIAL TO THE BASIN AT THE COMMENCEMENT OF PAVING ACTIVITIES.

BASIN DIMENSIONS (DEPTH x WIDTH x LENGTH):

A: 2- FT. x 45 - FT x 130 - FT

TOTAL REQUIRED SEDIMENT BASIN VOLUME: 9,000 CUBIC FEET FOR 2.5 ACRES

CONSTRUCTED SEDIMENT BASIN VOLUME: 11,700 CUBIC FEET FOR 2.50 ACRES




TEMPORARY SEDIMENT BASIN

IMPLEMENTATION	
BMP INSTALL	BMP REMOVE


MULTIUSE CONSTRUCTION AUTHORIZED UNDER NPDES PERMIT: NMR1005EN AND NMR100631

EXISTING BLOCK WALL




ASPHALT PAVING

FINAL STABILIZATION	




SOIL STABILIZER

FINAL STABILIZATION	



CRUSHER FINE PATH

FINAL STABILIZATION	



EARTHEN BERM

IMPLEMENTATION	
BMP INSTALL	BMP REMOVE

MATCH PAGE 8


COA FUGITIVE DUST CONTROL: THE OPERATORS WILL INSTALL A SECURITY FENCE WITH WIND SCREEN ATTACHED FOR FUGITIVE DUST MITIGATION.

FINAL STABILIZATION AND N.O.T. REQUIREMENTS:

ALL LOTS NOT STABILIZED WITH PERMANENT STRUCTURES REQUIRE TEMPORARY STABILIZATION FROM COMPLETION UNTIL VERTICAL CONSTRUCTION BEGINS. ALL TRACTS NOT STABILIZED WITH PERMANENT STABILIZATION STRUCTURES REQUIRE VEGETATIVE STABILIZATION TO MEET CGP FINAL STABILIZATION CRITERIA.

YES CALLE CUARTA TH, LLC IS SELLING THE INDIVIDUAL LOTS. FOR INDIVIDUAL LOTS, THE PURCHASING HOMEBUILDER WILL SUBMIT A NOTICE OF INTENT (NOI) FOR ALL LOTS MANAGED. YES CALLE CUARTA TH, LLC WILL SUBMIT ITS NOTICE OF TERMINATION AFTER ALL LOTS ARE SOLD AND NPDES PERMIT LIABILITY TRANSFERRED TO THE HOMEBUILDER. REFER TO THE REQUIREMENTS FOR SITES DISTURBING LESS THAN ONE ACRE BUT PART OF A 'COMMON PLAN OF DEVELOPMENT'.

YES CALLE CUARTA, LLC IS RESPONSIBLE FOR SWPPP MAINTENANCE UNTIL HOMEBUILDER(S) SUBMIT AN NOI FOR ITS LOTS AND RESPONSIBILITY TRANSFERRED.



- SWPPP
- Stormwater
- Erosion Control
- Reclamation
- Seeding

www.e2rc.com | 505.867.4040

NO.	REVISION ITEM	DATE
1	FINAL STABILIZATION & NOT NOTES UPDATED	12/7/23
2	SEDIMENT BASIN UPDATED	12/8/23

YES CALLE CUARTA TH, LLC
CALLE CUARTA RESIDENTIAL
SUBDIVISION
TESCP - PWO

DESIGNED BY:
K. FETTER, P.E.
DRAWN BY:
S. FETTER

SHEET:
9