


SILT FENCE GENERAL NOTES:

- 1. POSTS WHICH SUPPORT THE SILT FENCE SHALL BE INSTALLED ON A SLIGHT ANGLE TOWARD THE ANTICIPATED RUNOFF SOURCE. POST MUST BE EMBEDDED A MINIMUM OF ONE FOOT.
- 2. THE TOE OF THE SILT FENCE SHALL BE TRENCHED IN WITH A SPADE OR MECHANICAL TRENCHER, SO THAT THE DOWNSLOPE FACE OF THE TRENCH IS FLAT AND PERPENDICULAR TO THE LINE OF FLOW: WHERE FENCE CANNOT BE TRENCHED IN (e.g. PAVEMENT), WEIGHT FABRIC FLAP WITH ROCK ON UPHILL SIDE TO PREVENT FLOW FROM SEEPING UNDER
- 3. THE TRENCH MUST BE A MINIMUM OF 6 INCHES DEEP AND 6 INCHES WIDE TO ALLOW FOR THE SILT FENCE FABRIC TO BE LAID IN THE GROUND AND BACKFILLED WITH COMPACTED
- 4. SILT FENCE SHOULD BE SECURELY FASTENED TO EACH SUPPORT POST OR TO WIRE BACKING, WHICH IN TURN IS ATTACHED TO THE FENCE POST. THERE SHALL BE A 3 FOOT OVERLAP, SECURELY FASTENED WHERE ENDS OF FABRIC MEET.
- 5. INSPECTION SHALL BE AS SPECIFIED IN THE SWPPP. REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
- 6. SILT FENCE SHALL BE REMOVED WHEN FINAL STABILIZATION IS ACHIEVED OR ANOTHER EROSION OR SEDIMENT CONTROL DEVICE IS EMPLOYED.
- 7. ACCUMULATED SILT SHALL BE REMOVED WHEN IT REACHES A DEPTH OF HALF THE HEIGHT OF THE FENCE. THE SILT SHALL BE DISPOSED OF AT AN APPROVED SITE AND IN SUCH A MANNER AS TO NOT CONTRIBUTE TO ADDITIONAL SILTATION.

Silt Fence

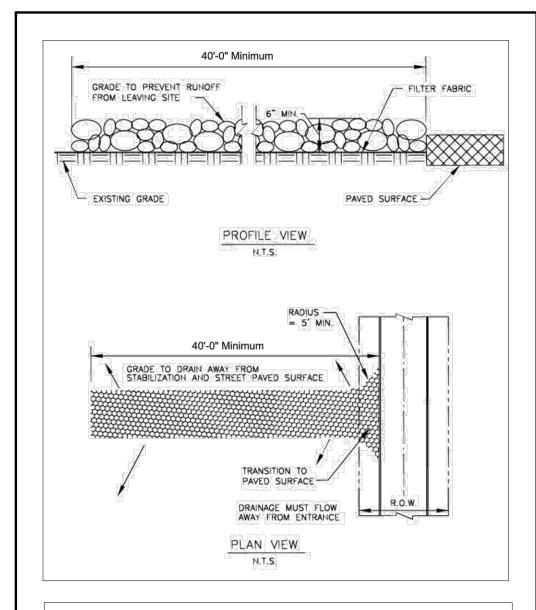

STABILIZED CONSTRUCTION ENTRANCE GENERAL NOTES

- STONE SHALL BE 3 TO 5 INCH DIAMETER COARSE AGGREGATE.
- LENGTH SHALL BE AS SPECIFIED IN THE SWPPP.
- 3. THE THICKNESS SHALL NOT BE LESS THAN 12 INCHES.
- 4. THE WIDTH SHALL BE NO LESS THAN THE FULL WIDTH OF ALL POINTS OF INGRESS OR EGRESS.
- 5. WHEN NECESSARY, VEHICLES SHALL BE CLEANED TO REMOVE SEDIMENT PRIOR TO ENTRANCE ONTO A PUBLIC ROADWAY. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE WITH DRAINAGE FLOWING AWAY FROM BOTH THE STREET AND THE STABILIZED ENTRANCE. ALL SEDIMENT SHALL BE PREVENTED FROM ENTERING ANY STORM DRAIN DITCH OR WATERCOURSE USING APPROVED METHODS.
- 6. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PAVED SURFACES: THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND. ALL SEDIMENT SPILLED, DROPPED, WASHED, OR TRACKED ONTO PAVED SURFACES MUST BE REMOVED IMMEDIATELY
- 7. THE ENTRANCE MUST BE PROPERLY GRADED OR INCORPORATE A DRAINAGE SWALE TO PREVENT RUNOFE FROM LEAVING THE CONSTRUCTION SITE.
- 8. PREVENT SHORTCUTTING OF THE FULL LENGTH OF THE CONSTRUCTION ENTRANCE BY INSTALLING BARRIERS AS
- 9. INSPECTION SHALL BE AS SPECIFIED IN THE SWPPP.

Construction Entrance

SITE DESCRIPTION

ROUTE 66 FLATS

7600 CENTRAL AVE SW

BLUELINE DEVELOPMENT 1004 SOUTHERN AVE WEST

FCI CONSTRUCTORS, INC

MISSOULA, MT 59801

AZTEC, NM 87410

FOR SCHEDULE

ALBUQUERQUE, NM 87121

EROSION AND SEDIMENT CONTROLS

STABILIZATION PRACTICES

DISTURBED AREAS ON WHICH CONSTRUCTION ACTIVITY HAS CEASED (TEMPORARILY OR PERMANENTLY) SHALL BE STABILIZED WITHIN 14 DAYS UNLESS ACTIVITIES ARE SCHEDULED TO RESUME WITHIN 21 DAYS.

ROCK RIP-RAP

SILT FENCE

ROCK BERMS

PIPE SLOPE DRAIN

INLET PROTECTION

CHECK DAM

12" WATTLES

CURB & GUTTER

STORM SEWER

CULVERTS

STORM SEWER INLETS

OTHER (DESCRIBE):

OTHER ADDITIONAL STORM WATER MANAGEMENT FEATURES

DIVERSION.INTERCEPTOR. OR PERIMETER DIKES

SEDIMENT BASIN (REQUIRED FOR 10 ACRES

TRIANGULAR SEDIMENT FILTER DIKE

STONE OUTLET SEDIMENT TRAP

OR LARGER WHERE ATTAINABLE)

STABILIZED CONSTRUCTION ENTRY

ORANGE CONSTRUCTION FENCE

STORM WATER DETENTION POND

VELOCITY DISSIPATION DEVICES

TEMPORARY SEDIMENT TANK

DIVERSION, INTERCEPTOR, OR PERIMETER SWALES

TEMPORARY PERMANENT SEED, SOD, AND/OR GRAVEL MULCH _X_ _X_ VEGETATION OTHER THAN SEED OR SOD EROSION CONTROL MATS NEW AFFORDABLE HOUSING (MULTIFAMILY), ASSOCIATED PARKING / LANDSCAPING PRESERVATION OF NATURAL VEGETATION ____ SOIL WETTING VERTICAL TRACKING

PERMANENT

<u>X</u>

CLEARING & GRUBBING MAJOR SOIL DISTURBING ACTIVITIES: STRUCTURAL PRACTICES EARTH MOVING

REFERENCE EROSION CONTROL PLAN

1427 WEST AZTEC BLVD, SUITE C3

INSTALLATION OF UTILITY LINES EXCAVATION OF PONDS TEMPORARY PERMANENT 0.63 PRE-DEVELOPMENT RUNOFF COEFFICIENT: FINAL RUNOFF COEFFICIENT AFTER CONSTRUCTION: 0.78

TOTAL AREA TO BE DISTURBED: 2.30 ACRES **DESCRIPTION OF EXISTING SOIL:** SILTY SAND — WELL DRAINED

±2.11 ACRES

APPROXIMATE GRAIN SIZE DISTRIBUTION: PI = 0.0 - NON-PLASTIC(% PASSING) No 200 - ±41% No $100 - \pm 67\%$

No 40 - ±89% No 4 $- \pm 100\%$ 1/2" - ± 100 % 3/4" - ± 100 %

RAINFALL EROSIVITY FACTOR: R = 22.67

DESCRIPTION OF BMPs

PROJECT NAME & LOCATION:

OWNER NAME & ADDRESS:

PROJECT DESCRIPTION:

TOTAL PROJECT AREA:

CONTRACTOR NAME & ADDRESS:

SEQUENCE OF MAJOR ACTIVITIES:

SILT FENCE ROCK CHECK DAM INLET PROTECTION CONCRETE WASHOUT AREA VERTICAL TRACKING MATERIAL / WASTE MANAGEMENT CONSTRUCTION ENTRANCE 12" WATTLES (AS NEEDED)

NAME OF RECEIVING WATERS:

RIO GRANDE

ESTIMATED PROJECT START DATE:

ESTIMATED PROJECT END DATE:

PERSONNEL RESPONSIBLE FOR DESIGN, INSTALLATION, AND MAINTENANCE OF BMPs:

ALBUQUERQUE, NM 87113

PERSONNEL RESPONSIBLE FOR THE APPLICATION & STORAGE OF TREATMENT CHEMICALS:

ALBUQUERQUE, NM 87113


PERSONNEL RESPONSIBLE FOR CONDUCTING INSPECTIONS:

PERSONNEL RESPONSIBLE FOR DTAKING CORRECTIVE ACTIONS PER PART 5 OF THE CGP:

ALBUQUERQUE, NM 87113

ALBUQUERQUE, NM 87113

nginee

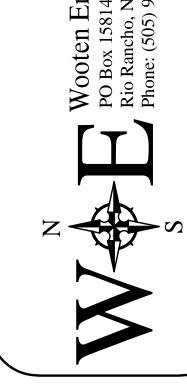

 $\geqslant \circ$ Flats
Ave
NM 8 6 t Route 300 Cen uquerqu 76 Albu