


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
GRADE LEVEL	+	1.6 fc	5.6 fc	0.0 fc	N/A	N/A

....SAMANA APARTMENT SITE LIGHTING....






D-Series Size 0 LED Area Luminaire



d^{series}

Specifications

EPA:	0.44 ft ² (0.04 m ²)
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

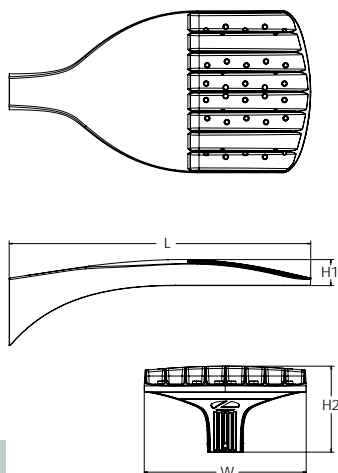

ds Design Select options indicated by this color background.

Catalog Number	DSX0 LED-P3-30K-70CRI-BLC4-MVOLT-XXX-XXX
Notes	SAMANA APARTMENTS SITE LIGHTING
Type	SP1

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.
*See ordering tree for details

Ordering Information

EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED	P3	30K	70CRI	BLC4	MVOLT	XXX
Series	LEDs	Color temperature ²	Color Rendering Index ²	Distribution	Voltage	Mounting
DSX0 LED	Forward optics	(this section 70CRI only)		AFR Automotive front row	T5M Type V medium	Shipped included SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) ⁹ RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) ⁹ SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket ¹⁰ MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)
	P1 P5	30K 3000K	70CRI	T1S Type I short	T5LG Type V low glare	
	P2 P6	40K 4000K	70CRI	T2M Type II medium	T5W Type V wide	
	P3 P7	50K 5000K	70CRI	T3M Type III medium	BLC3 Type III backlight control ³	
	P4			T3LG Type III low glare ³	BLC4 Type IV backlight control ³	
	Rotated optics	27K 2700K	80CRI	T4M Type IV medium	LCCO Left corner cutoff ³	
	P10 ¹ P12 ¹	30K 3000K	80CRI	T4LG Type IV low glare ³	RCCO Right corner cutoff ³	
	P11 ¹ P13 ¹	35K 3500K	80CRI	TFTM Forward throw medium		
		40K 4000K	80CRI			
		50K 5000K	80CRI			
					MVOLT (120V-277V) ⁴ HVOLT (347V-480V) ^{5,6} XVOLT (277V-480V) ^{7,8} 120 ^{16, 24} 208 ^{16, 24} 240 ^{16, 24} 277 ^{16, 24} 347 ^{16, 24} 480 ^{16, 24}	

				XXX	
Control options		Other options		Finish (required)	
Shipped installed		Shipped installed			
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. ^{11, 12, 18, 19}	PER7	Seven-pin receptacle only (controls ordered separate) ^{14, 19}	DDBXD	Dark Bronze
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. ^{13, 18, 19}	FAO	Field adjustable output ^{15, 19}	DBLXD	Black
PER	NEMA twist-lock receptacle only (controls ordered separate) ¹⁴	BL30	Bi-level switched dimming, 30% ^{16, 19}	DNAXD	Natural Aluminum
PERS	Five-pin receptacle only (controls ordered separate) ^{14, 19}	BL50	Bi-level switched dimming, 50% ^{16, 19}	DWHXD	White
		DMG	0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷	DDBTXD	Textured dark bronze
				DBLBXD	Textured black
				DNATXD	Textured natural aluminum
				DWHGXD	Textured white
					</



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2025 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED
Rev. 04/29/25
Page 1 of 9

Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²³
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²³
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²³
DSHORT SBK	Shorting cap ²³
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0BDB (FINISH)	Bird spike deterrent bracket (specify finish)


NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPA5 and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120 or 277V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

Shield Accessories




External Glare Shield (EGSR)




House Side Shield (HS)

Drilling

HANDHOLE ORIENTATION (from top of pole)



Handhole

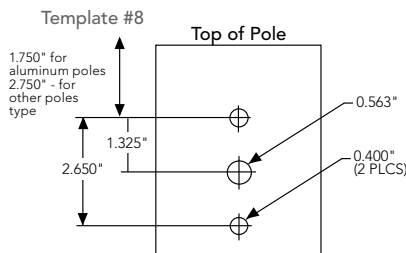

Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

DSX0 Area Luminaire - EPA

*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.
















Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPA5, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](https://www.lithonia.com).

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').

LEGEND

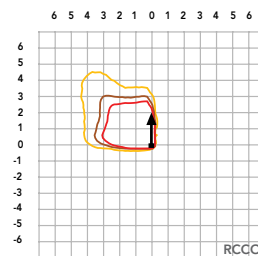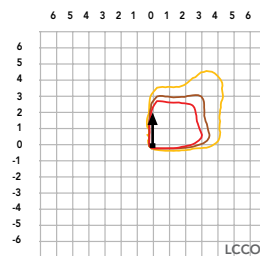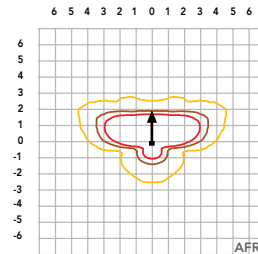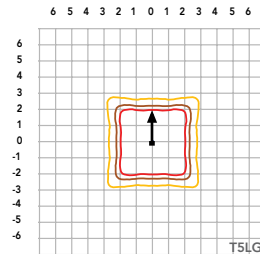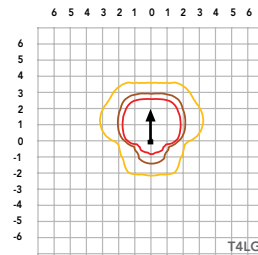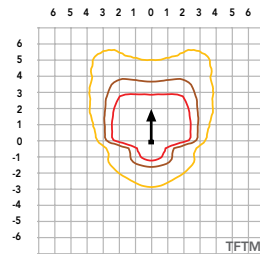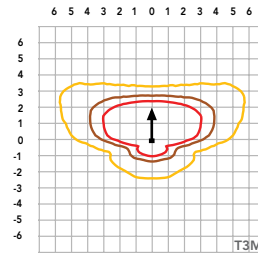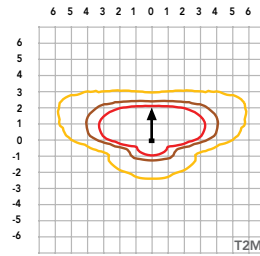

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

Electrical Load

					Current (A)					
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor override when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2025 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED
Rev. 04/29/25
Page 4 of 9

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157
P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
				T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
				T3M	5,930	1	0	3	131	6,180	1	0	3	137	6,301	1	0	3	140
				T3LG	5,297	1	0	1	117	5,521	1	0	1	122	5,628	1	0	1	125
				T4M	6,018	1	0	3	133	6,272	1	0	3	139	6,395	1	0	3	142
				T4LG	5,474	1	0	1	121	5,705	1	0	1	126	5,816	1	0	1	129
				TFTM	6,060	1	0	3	134	6,316	1	0	3	140	6,439	1	0	3	143
				T5M	6,192	3	0	1	137	6,453	3	0	2	143	6,579	3	0	2	146
				T5W	6,293	3	0	2	139	6,558	3	0	2	145	6,686	3	0	2	148
				T5LG	6,210	2	0	1	138	6,472	3	0	1	143	6,598	3	0	1	146
				BLC3	4,313	0	0	2	96	4,495	0	0	2	100	4,583	0	0	2	102
				BLC4	4,455	0	0	2	99	4,643	0	0	2	103	4,733	0	0	2	105
				RCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102
				LCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102
				AFR	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
P3	69W	20	1050	T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
				T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
				T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
				T3M	10,680	2	0	3	115	11,130	2	0	3	120	11,347	2	0	3	122
				T3LG	9,540	1	0	2	103	9,942	1	0	2	107	10,136	1	0	2	109
				T4M	10,839	2	0	3	117	11,296	2	0	3	121	11,516	2	0	4	124
				T4LG	9,858	1	0	2	106	10,274	1	0	2	110	10,474	1	0	2	113
				TFTM	10,914	2	0	3	117	11,374	2	0	3	122	11,596	2	0	3	125
				T5M	11,152	4	0	2	120	11,622	4	0	2	125	11,849	4	0	2	127
				T5W	11,332	4	0	3	122	11,811	4	0	3	127	12,041	4	0	3	129
				T5LG	11,184	3	0	1	120	11,656	3	0	2	125	11,883	3	0	2	128
				BLC3	7,768	0	0	2	83	8,096	0	0	2	87	8,254	0	0	2	89
				BLC4	8,023	0	0	3	86	8,362	0	0	3	90	8,524	0	0	3	92
				RCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90
				LCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90
				AFR	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
				T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
				T3M	16,442	2	0	4	120	17,135	3	0	4	125	17,469	3	0	4	128
				T3LG	14,687	2	0	2	107	15,306	2	0	2	112	15,605	2	0	2	114
				T4M	16,687	2	0	4	122	17,391	3	0	5	127	17,730	3	0	5	129
				T4LG	15,177	2	0	2	111	15,817	2	0	2	115	16,125	2	0	2	118
				TFTM	16,802	2	0	4	123	17,511	2	0	4	128	17,852	2	0	5	130
				T5M	17,168	4	0	2	125	17,893	5	0	3	131	18,241	5	0	3	133
				T5W	17,447	5	0	3	127	18,183	5	0	3	133	18,537	5	0	3	135
				T5LG	17,218	4	0	2	126	17,944	4	0	2	131	18,294	4	0	2	134
				BLC3	11,959	0	0	3	87	12,464	0	0	3	91	12,707	0	0	3	93
				BLC4	12,352	0	0	4	90	12,873	0	0	4	94	13,124	0	0	4	96
				RCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				LCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				AFR	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300	T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129

Performance Data


Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
P11	68W	30	700	T3M	8,768	3	0	3	129	9,138	3	0	3	134	9,316	3	0	3	137
				T3LG	7,833	3	0	3	115	8,164	3	0	3	120	8,323	3	0	3	122
				T4M	8,899	3	0	3	131	9,274	3	0	3	136	9,455	3	0	3	139
				T4LG	8,093	3	0	3	119	8,435	3	0	3	124	8,599	3	0	3	126
				TFTM	8,962	3	0	3	132	9,340	3	0	3	137	9,522	3	0	3	140
				T5M	9,156	4	0	2	135	9,542	4	0	2	140	9,728	4	0	2	143
				T5W	9,304	4	0	2	137	9,696	4	0	2	143	9,885	4	0	2	145
				T5LG	9,182	3	0	1	135	9,569	3	0	1	141	9,756	3	0	1	143
				BLC3	6,378	3	0	3	94	6,647	3	0	3	98	6,777	3	0	3	100
				BLC4	6,587	3	0	3	97	6,865	3	0	3	101	6,999	3	0	3	103
				RCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				LCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				AFR	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
P12	103W	30	1050	T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
				T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
				T3M	14,714	4	0	4	114	15,335	4	0	4	119	15,634	4	0	4	121
				T3LG	13,145	3	0	3	102	13,700	3	0	3	106	13,967	3	0	3	108
				T4M	14,933	4	0	4	116	15,563	4	0	4	121	15,867	4	0	4	123
				T4LG	13,582	3	0	3	105	14,155	3	0	3	110	14,431	3	0	3	112
P13	129W	30	1300	TFTM	15,039	4	0	4	117	15,673	4	0	4	122	15,979	4	0	4	124
				T5M	15,364	4	0	2	119	16,013	4	0	2	124	16,325	4	0	2	127
				T5W	15,613	5	0	3	121	16,272	5	0	3	126	16,589	5	0	3	129
				T5LG	15,409	3	0	2	120	16,059	3	0	2	125	16,372	4	0	2	127
				BLC3	10,703	4	0	4	83	11,155	4	0	4	87	11,372	4	0	4	88
				BLC4	11,054	4	0	4	86	11,520	4	0	4	89	11,745	4	0	4	91
				RCCO	10,800	1	0	2	84	11,256	1	0	2	87	11,475	1	0	3	89
				LCCO	10,800	1	0	2	84	11,255	1	0	2	87	11,475	1	0	3	89
				AFR	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130



Dimensions

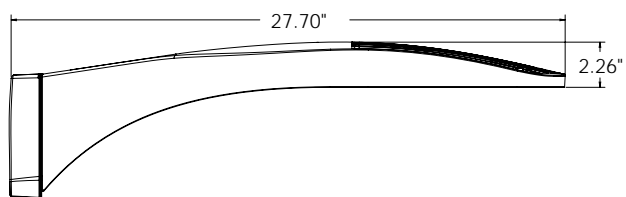


DSX0 with RPA, RPA5, SPA5, SPA8N mount
Weight: 25 lbs

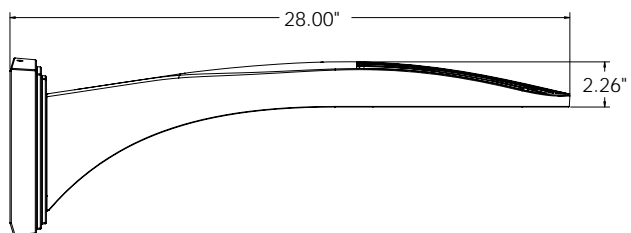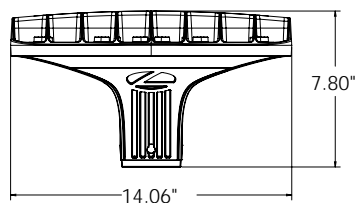


DSX0 with WBA mount
Weight: 27 lb

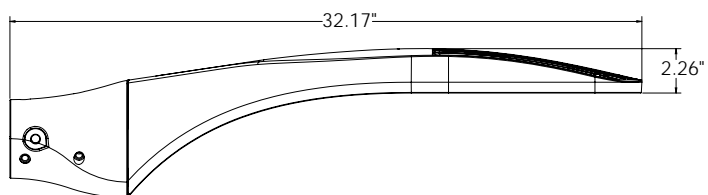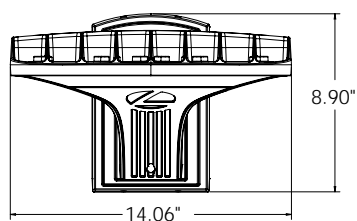


DSX0 with MA mount
Weight: 28 lbs

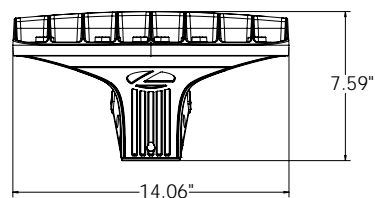


SPA (STANDARD ARM)




RPA




SPA5



RPA5




SPA8N



nLight Sensor Coverage Pattern

NLTAIR2 PIRHN



FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




D-Series Size 0 LED Area Luminaire



d^sseries

Specifications

EPA:	0.44 ft ² (0.04 m ²)
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

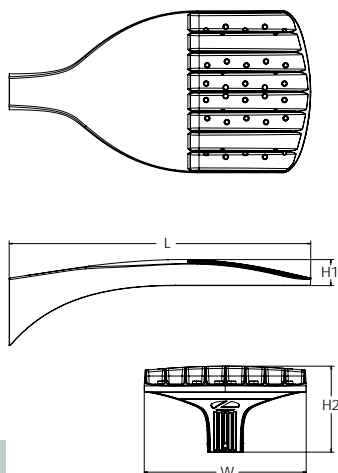

ds Design Select options indicated by this color background.

Catalog Number	DSX0 LED-P3-30K-70CRI-BLC4-MVOLT-XXX-XXX
Notes	SAMANA APARTMENTS SITE LIGHTING
Type	SP1

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.
*See ordering tree for details

Ordering Information

EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED	P3	30K	70CRI	BLC4	MVOLT	XXX
Series	LEDs	Color temperature ²	Color Rendering Index ²	Distribution	Voltage	Mounting
DSX0 LED	Forward optics	(this section 70CRI only)		AFR Automotive front row	T5M Type V medium	Shipped included SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) ⁹ RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) ⁹ SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket ¹⁰ MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)
	P1 P5	30K 3000K	70CRI	T1S Type I short	T5LG Type V low glare	
	P2 P6	40K 4000K	70CRI	T2M Type II medium	T5W Type V wide	
	P3 P7	50K 5000K	70CRI	T3M Type III medium	BLC3 Type III backlight control ³	
	P4			T3LG Type III low glare ³	BLC4 Type IV backlight control ³	
	Rotated optics	27K 2700K	80CRI	T4M Type IV medium	LCCO Left corner cutoff ³	
	P10 ¹ P12 ¹	30K 3000K	80CRI	T4LG Type IV low glare ³	RCCO Right corner cutoff ³	
	P11 ¹ P13 ¹	35K 3500K	80CRI	TFTM Forward throw medium		
		40K 4000K	80CRI			
		50K 5000K	80CRI			
					MVOLT (120V-277V) ⁴ HVOLT (347V-480V) ^{5,6} XVOLT (277V-480V) ^{7,8} 120 ^{16, 24} 208 ^{16, 24} 240 ^{16, 24} 277 ^{16, 24} 347 ^{16, 24} 480 ^{16, 24}	

				XXX	
Control options		Other options		Finish (required)	
Shipped installed		Shipped installed			
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{11, 12, 18, 19}	PER7	Seven-pin receptacle only (controls ordered separate) ^{14, 19}	DDBXD	Dark Bronze
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{13, 18, 19}	FAO	Field adjustable output ^{15, 19}	DBLXD	Black
PER	NEMA twist-lock receptacle only (controls ordered separate) ¹⁴	BL30	Bi-level switched dimming, 30% ^{16, 19}	DNAXD	Natural Aluminum
PERS	Five-pin receptacle only (controls ordered separate) ^{14, 19}	BL50	Bi-level switched dimming, 50% ^{16, 19}	DWHXD	White
		DMG	0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷	DDBTXD	Textured dark bronze
				DBLBXD	Textured black
				DNATXD	Textured natural aluminum
				DWHGXD	Textured white
				</	



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2025 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED
Rev. 04/29/25
Page 1 of 9

Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²³
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²³
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²³
DSHORT SBK	Shorting cap ²³
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0BDB (FINISH)	Bird spike deterrent bracket (specify finish)


NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPA5 and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120 or 277V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

Shield Accessories




External Glare Shield (EGSR)




House Side Shield (HS)

Drilling

HANDHOLE ORIENTATION (from top of pole)



Handhole

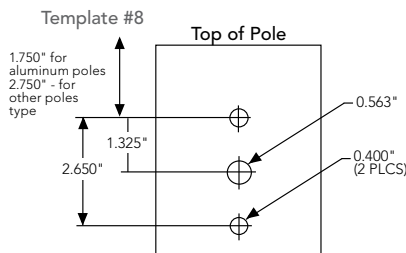

Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

DSX0 Area Luminaire - EPA

*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPA5, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93
















Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](#).

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').

LEGEND

- 0.1 fc
- 0.5 fc
- 1.0 fc

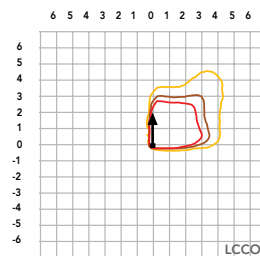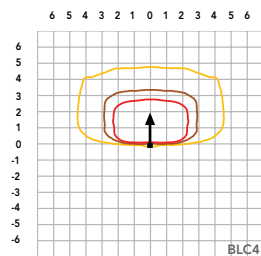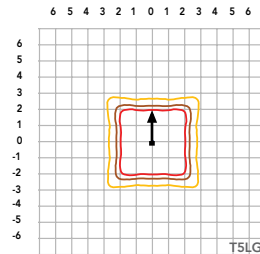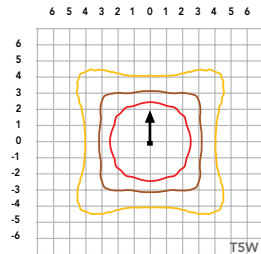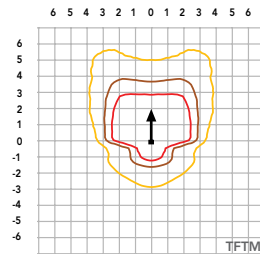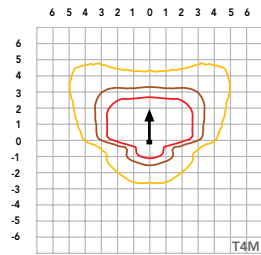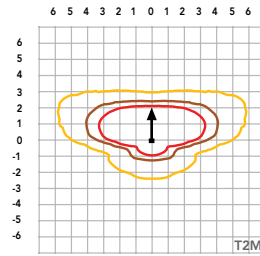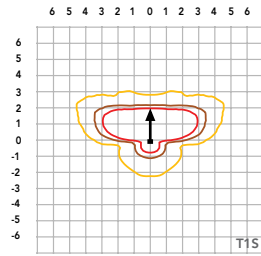

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor override when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

Electrical Load

					Current (A)					
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157
P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
				T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
				T3M	5,930	1	0	3	131	6,180	1	0	3	137	6,301	1	0	3	140
				T3LG	5,297	1	0	1	117	5,521	1	0	1	122	5,628	1	0	1	125
				T4M	6,018	1	0	3	133	6,272	1	0	3	139	6,395	1	0	3	142
				T4LG	5,474	1	0	1	121	5,705	1	0	1	126	5,816	1	0	1	129
				TFTM	6,060	1	0	3	134	6,316	1	0	3	140	6,439	1	0	3	143
				T5M	6,192	3	0	1	137	6,453	3	0	2	143	6,579	3	0	2	146
				T5W	6,293	3	0	2	139	6,558	3	0	2	145	6,686	3	0	2	148
				T5LG	6,210	2	0	1	138	6,472	3	0	1	143	6,598	3	0	1	146
				BLC3	4,313	0	0	2	96	4,495	0	0	2	100	4,583	0	0	2	102
				BLC4	4,455	0	0	2	99	4,643	0	0	2	103	4,733	0	0	2	105
				RCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102
				LCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102
				AFR	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
P3	69W	20	1050	T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
				T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
				T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
				T3M	10,680	2	0	3	115	11,130	2	0	3	120	11,347	2	0	3	122
				T3LG	9,540	1	0	2	103	9,942	1	0	2	107	10,136	1	0	2	109
				T4M	10,839	2	0	3	117	11,296	2	0	3	121	11,516	2	0	4	124
				T4LG	9,858	1	0	2	106	10,274	1	0	2	110	10,474	1	0	2	113
				TFTM	10,914	2	0	3	117	11,374	2	0	3	122	11,596	2	0	3	125
				T5M	11,152	4	0	2	120	11,622	4	0	2	125	11,849	4	0	2	127
				T5W	11,332	4	0	3	122	11,811	4	0	3	127	12,041	4	0	3	129
				T5LG	11,184	3	0	1	120	11,656	3	0	2	125	11,883	3	0	2	128
				BLC3	7,768	0	0	2	83	8,096	0	0	2	87	8,254	0	0	2	89
				BLC4	8,023	0	0	3	86	8,362	0	0	3	90	8,524	0	0	3	92
				RCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90
				LCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90
				AFR	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
				T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
				T3M	16,442	2	0	4	120	17,135	3	0	4	125	17,469	3	0	4	128
				T3LG	14,687	2	0	2	107	15,306	2	0	2	112	15,605	2	0	2	114
				T4M	16,687	2	0	4	122	17,391	3	0	5	127	17,730	3	0	5	129
				T4LG	15,177	2	0	2	111	15,817	2	0	2	115	16,125	2	0	2	118
				TFTM	16,802	2	0	4	123	17,511	2	0	4	128	17,852	2	0	5	130
				T5M	17,168	4	0	2	125	17,893	5	0	3	131	18,241	5	0	3	133
				T5W	17,447	5	0	3	127	18,183	5	0	3	133	18,537	5	0	3	135
				T5LG	17,218	4	0	2	126	17,944	4	0	2	131	18,294	4	0	2	134
				BLC3	11,959	0	0	3	87	12,464	0	0	3	91	12,707	0	0	3	93
				BLC4	12,352	0	0	4	90	12,873	0	0	4	94	13,124	0	0	4	96
				RCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				LCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				AFR	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300	T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129

Performance Data


Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
				T3M	8,768	3	0	3	129	9,138	3	0	3	134	9,316	3	0	3	137
				T3LG	7,833	3	0	3	115	8,164	3	0	3	120	8,323	3	0	3	122
				T4M	8,899	3	0	3	131	9,274	3	0	3	136	9,455	3	0	3	139
				T4LG	8,093	3	0	3	119	8,435	3	0	3	124	8,599	3	0	3	126
				TFTM	8,962	3	0	3	132	9,340	3	0	3	137	9,522	3	0	3	140
				T5M	9,156	4	0	2	135	9,542	4	0	2	140	9,728	4	0	2	143
				T5W	9,304	4	0	2	137	9,696	4	0	2	143	9,885	4	0	2	145
				T5LG	9,182	3	0	1	135	9,569	3	0	1	141	9,756	3	0	1	143
				BLC3	6,378	3	0	3	94	6,647	3	0	3	98	6,777	3	0	3	100
				BLC4	6,587	3	0	3	97	6,865	3	0	3	101	6,999	3	0	3	103
				RCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				LCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				AFR	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050	T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
				T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
				T3M	14,714	4	0	4	114	15,335	4	0	4	119	15,634	4	0	4	121
				T3LG	13,145	3	0	3	102	13,700	3	0	3	106	13,967	3	0	3	108
				T4M	14,933	4	0	4	116	15,563	4	0	4	121	15,867	4	0	4	123
				T4LG	13,582	3	0	3	105	14,155	3	0	3	110	14,431	3	0	3	112
				TFTM	15,039	4	0	4	117	15,673	4	0	4	122	15,979	4	0	4	124
				T5M	15,364	4	0	2	119	16,013	4	0	2	124	16,325	4	0	2	127
				T5W	15,613	5	0	3	121	16,272	5	0	3	126	16,589	5	0	3	129
				T5LG	15,409	3	0	2	120	16,059	3	0	2	125	16,372	4	0	2	127
				BLC3	10,703	4	0	4	83	11,155	4	0	4	87	11,372	4	0	4	88
				BLC4	11,054	4	0	4	86	11,520	4	0	4	89	11,745	4	0	4	91
				RCCO	10,800	1	0	2	84	11,256	1	0	2	87	11,475	1	0	3	89
				LCCO	10,800	1	0	2	84	11,255	1	0	2	87	11,475	1	0	3	89
				AFR	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130



Dimensions

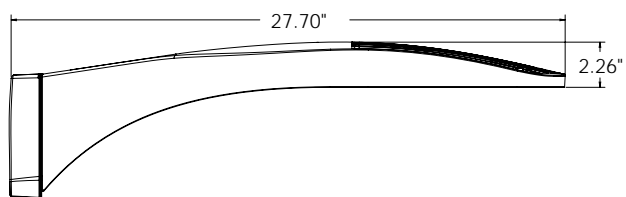


DSX0 with RPA, RPA5, SPA5, SPA8N mount
Weight: 25 lbs

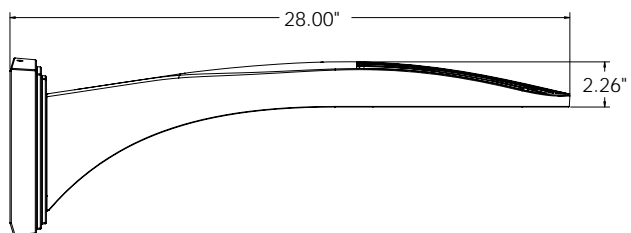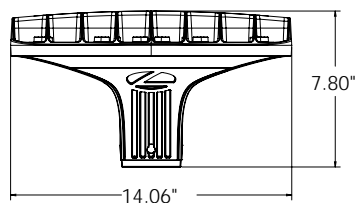


DSX0 with WBA mount
Weight: 27 lb

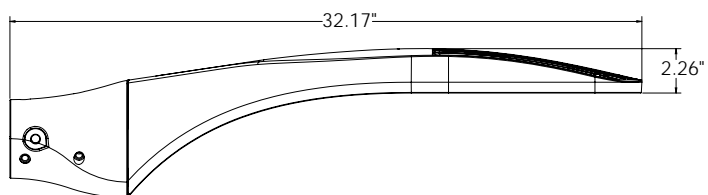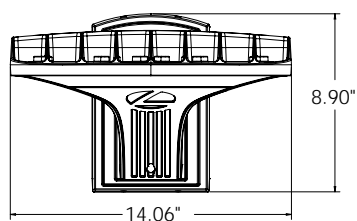


DSX0 with MA mount
Weight: 28 lbs

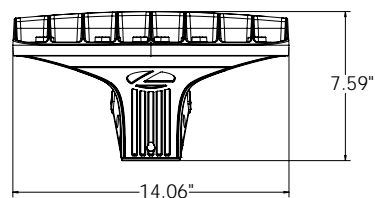


SPA (STANDARD ARM)




RPA




SPA5



RPA5




SPA8N



nLight Sensor Coverage Pattern

NLTAIR2 PIRHN



FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



WDGE3 LED

Architectural Wall Sconce



Catalog Number WDGE3 LED-P2-30K-70CRI-R4-MVOLT-SRM-XXX


Notes SAMANA APARTMENTS SITE LIGHTING

Type WP1

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

Depth (D1): 8"
Depth (D2): 1.5"
Height: 9"
Width: 18"
Weight: 19.5 lbs
(without options)

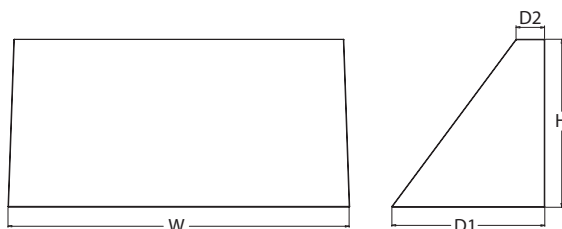

Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.
*See ordering tree for details

WDGE LED Family Overview

Luminaire	Optics	Standard EM, 0°C	Cold EM, -20°C	Sensor	Approximate Lumens (4000K, 80CRI)						
					P0	P1	P2	P3	P4	P5	P6
WDGE1 LED	Visual Comfort	4W		--	750	1,200	2,000	--	--	--	--
WDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight	--	1,200	2,000	3,000	4,500	6,000	--
WDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200	--	--
WDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight	6,000	7,500	8,500	10,000	12,000	--	--
WDGE4 LED	Precision Refractive			Standalone / nLight	--	12,000	16,000	18,000	20,000	22,000	25,000

Ordering Information

EXAMPLE: WDGE3 LED P3 40K 70CRI R3 MVOLT SRM DDBXD

WDGE3 LED	P2	30K	70CRI	R4	MVOLT	SRM
Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting
WDGE3 LED	P0 P1 P2 P3 P4	30K 3000K 40K 4000K 50K 5000K	70CRI 80CRI	R2 Type 2 R3 Type 3 R4 Type 4 RFT Forward Throw	MVOLT 347 ¹ 480 ¹	Shipped included SRM Surface mounting bracket ICW Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) ² Shipped separately AWS 3/8 inch Architectural wall spacer ³ PBBW Surface-mounted back box (top, left, right conduit entry). Use when there is no junction box available. ³

						XXX
Options						Finish
E15WH	Emergency battery backup, Certified in CA Title 20 MAEDBS (15W, 5°C min)	Standalone Sensors/Controls				DDBXD Dark bronze
E20WC	Emergency battery backup, Certified in CA Title 20 MAEDBS (18W, -20°C min)	PIR Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching.				DBLXD Black
PE	Photocell, Button Type ⁴	PIR Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching				DNAXD Natural aluminum
DMG	0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately) ⁵	PIR1FC3V Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-programmed for dusk to dawn operation.				DWHXD White
BCE	Bottom conduit entry for back box (PBBW). Total of 4 entry points.	PIR1FC3V Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk to dawn operation.				DSSXD Sandstone
SPD10KV	10kV Surge pack ⁶	Networked Sensors/Controls				DBTDXD Textured dark bronze
CCE	Coastal Construction ³	NLTAIR2 PIR Embedded wireless controls by nLight with Passive Infrared Occ sensor and on/off photocell for 8-15' mounting heights.				DBLXD Textured black
		NLTAIR2 PIRH Embedded wireless controls by nLight with Passive Infrared Occ sensor and on/off photocell for 15'-30' mounting heights.				DNATXD Textured natural aluminum
		NLTAIREM2 PIR Embedded wireless controls by nLight with UL924 listed emergency operation, Passive Infrared Occ sensor and on/off photocell for 8-15' mounting heights ⁷				DWHGXD Textured white
		NLTAIREM2 PIRH Embedded wireless controls by nLight with UL924 listed emergency operation, Passive Infrared Occ sensor and on/off photocell for 15'-30' mounting heights				DSSTXD Textured sandstone

See page 4 for out of box functionality

Accessories

Ordered and shipped separately.

WDGEAWS DDBXD WDGE 3/8inch Architectural Wall Spacer (specify finish)
WDGE3PBBW DDBXD U WDGE3 surface-mounted back box (specify finish)

NOTES

- 347V and 480V not available with E15WH and E20WC.
- Not qualified for DLC. Not available with emergency battery backup or sensors/controls.
- For PBBW and AWS with CCE option, require an RFA.
- PE not available in 480V and with sensors/controls.
- DMG option not available with sensors/controls.
- Not available with E20WC option.
- Available with MVOLT only and only rated to 25C ambient.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2019-2025 Acuity Brands Lighting, Inc. All rights reserved.

WDGE3 LED
Rev. 02/24/25

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	30K (3000K, 70 CRI)					40K (4000K, 70 CRI)					50K (5000K, 70 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P0	41W	R2	6,172	151	1	0	1	6,104	149	2	0	1	6,394	156	2	0	1
		R3	6,071	148	1	0	2	6,004	146	1	0	2	6,290	153	1	0	2
		R4	6,256	153	1	0	2	6,187	151	1	0	2	6,481	158	1	0	2
		RFT	6,126	149	1	0	2	6,058	148	1	0	2	6,347	155	1	0	2
P1	52W	R2	7,037	136	1	0	1	7,649	148	2	0	1	7,649	148	2	0	1
		R3	6,922	134	1	0	2	7,524	145	1	0	2	7,524	145	1	0	2
		R4	7,133	138	1	0	2	7,753	150	1	0	2	7,753	150	1	0	2
		RFT	6,985	135	1	0	2	7,592	147	1	0	2	7,592	147	1	0	2
P2	59W	R2	7,968	135	2	0	1	8,661	147	2	0	1	8,661	147	2	0	1
		R3	7,838	133	1	0	2	8,519	144	1	0	2	8,519	144	1	0	2
		R4	8,077	137	1	0	2	8,779	149	1	0	2	8,779	149	1	0	2
		RFT	7,909	134	1	0	2	8,597	146	2	0	2	8,597	146	2	0	2
P3	71W	R2	9,404	132	2	0	1	10,221	143	2	0	1	10,221	143	2	0	1
		R3	9,250	130	2	0	2	10,054	141	2	0	2	10,054	141	2	0	2
		R4	9,532	134	2	0	2	10,361	145	2	0	2	10,361	145	2	0	2
		RFT	9,334	131	2	0	2	10,146	142	2	0	2	10,146	142	2	0	2
P4	88W	R2	11,380	129	2	0	1	12,369	140	2	0	1	12,369	140	2	0	1
		R3	11,194	127	2	0	2	12,167	138	2	0	2	12,167	138	2	0	2
		R4	11,535	131	2	0	2	12,538	142	2	0	2	12,538	142	2	0	2
		RFT	11,295	128	2	0	2	12,277	139	2	0	2	12,277	139	2	0	2

Lumen Output in Emergency Mode (4000K, 70 CRI)

Option	Dist. Type	Lumens
E15WH	R2	3,185
	R3	3,133
	R4	3,229
	RFT	3,162
E20WC	R2	3,669
	R3	3,609
	R4	3,719
	RFT	3,642

Electrical Load

Performance Package	System Watts	Current (A)					
		120V	208V	240V	277V	347V	480V
P1	52W	0.437	0.246	0.213	0.186	0.150	0.110
P2	59W	0.498	0.287	0.251	0.220	0.175	0.126
P3	71W	0.598	0.344	0.300	0.262	0.210	0.152
P4	88W	0.727	0.424	0.373	0.333	0.260	0.190

Lumen Multiplier for 80CRI

CCT	Multiplier
30K	0.891
40K	0.906
50K	0.906

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C	1.05
10°C	1.03
20°C	1.01
25°C	1.00
30°C	0.99
40°C	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.98	>0.97	>0.92


Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

LEGEND



MH = 15ft
Grid = 15ft x 15ft

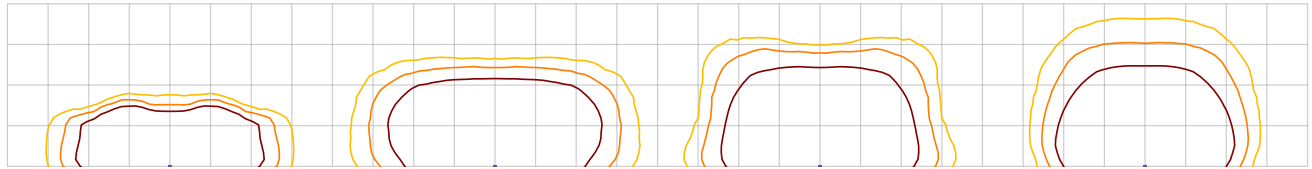

WDGE3 LED P3 40K 70CRI R2

WDGE3 LED P3 40K 70CRI R3

WDGE3 LED P3 40K 70CRI R4

WDGE3 LED P3 40K 70CRI RFT

Emergency Egress Options


Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain, minimum of 60% of the light output at the end of 90 minutes.



Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

The examples below show illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E15WH or E20WC and R4 distribution.


Grid = 10ft x 10ft



WDGE3 LED xx 40K 70CRI R4 MVOLT E15WH



WDGE3 LED xx 40K 70CRI R4 MVOLT E20WC



Control / Sensor Options

Motion/Ambient Sensor (PIR, PIRH)



Motion/Ambient sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.

Networked Control (NLTAIR2)

nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY™ Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.


PIR

HIGH VIEW

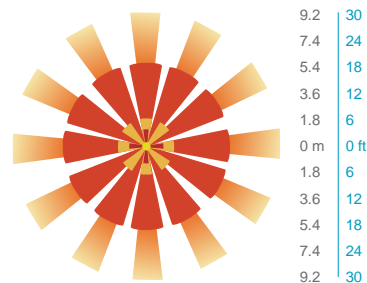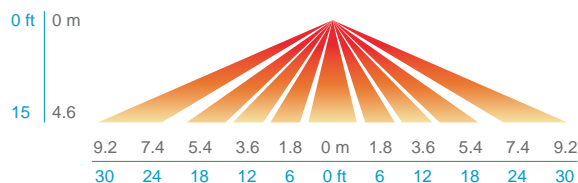


PIRH

SIDE VIEW

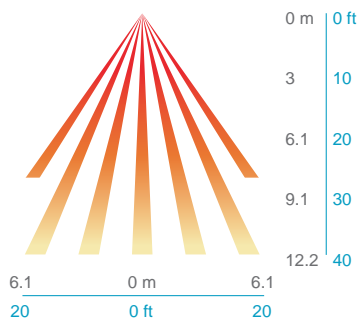

TOP VIEW

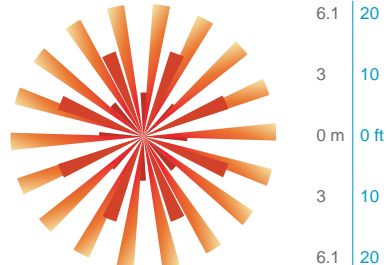

Motion/Ambient Sensor Default Settings

Option	Dim Level	High Level (when triggered)	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH, NLTAIREM2 PIR, NLTAIREM2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec

UL 924 Response - nLight AIR Devices with EM Option

- NLTAIREM2 devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, NLTAIREM2 devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- The non-emergency devices, NLTAIR2 PIR and NLTAIR2 PIRH, with version 3.4 or later firmware can be used for normal power sensing.



**NLTAIR2 PIR – nLight AIR
Motion/Ambient Sensor**

D = 8"
H = 11"
W = 18"



PBBW – Surface-Mounted Back Box
Use when there is no junction box available.

D = 1.75"
H = 9"
W = 18"



AWS – 3/8inch Architectural Wall Spacer

D = 0.38"
H = 4.4"
W = 7.5"

FEATURES & SPECIFICATIONS

INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

CONSTRUCTION

The single-piece die-cast aluminum housing to optimize thermal transfer from the light engine and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire.

FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

OPTICS

Individually formed acrylic lenses are engineered for superior application efficiency which maximizes the light in the areas where it is most needed. Light engines are available in 3000 K, 4000 K or 5000 K configurations. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L92/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated; luminaire is IP65 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature and SRM mounting only.

GOVERNMENT PROCUREMENT

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.