HYDROLOGY L23/D7 TWO PLANS

L23/D7

2 PLANS

SAD

Wells Sandia Manor Drainage
structure

Clearing, removal & Disposal of existing headwall	LS.		$300.10
Remove & reinstall Chain Link Fence	S.F.	480 x $2.89	1387.20
60" RCP, Class III, Complete in place in trench	LF	150' x $90.10	13,515.00
Reinforced concrete Headwall	C.Y.	7 x $346.50	2425.50
Excavation for Headwall	C.Y.	80 x $5.78	462.40
			18,090.20

L23-07

48" RCP class IV, Complete in Place in trench LF 150 x $63.53 = 9528.75
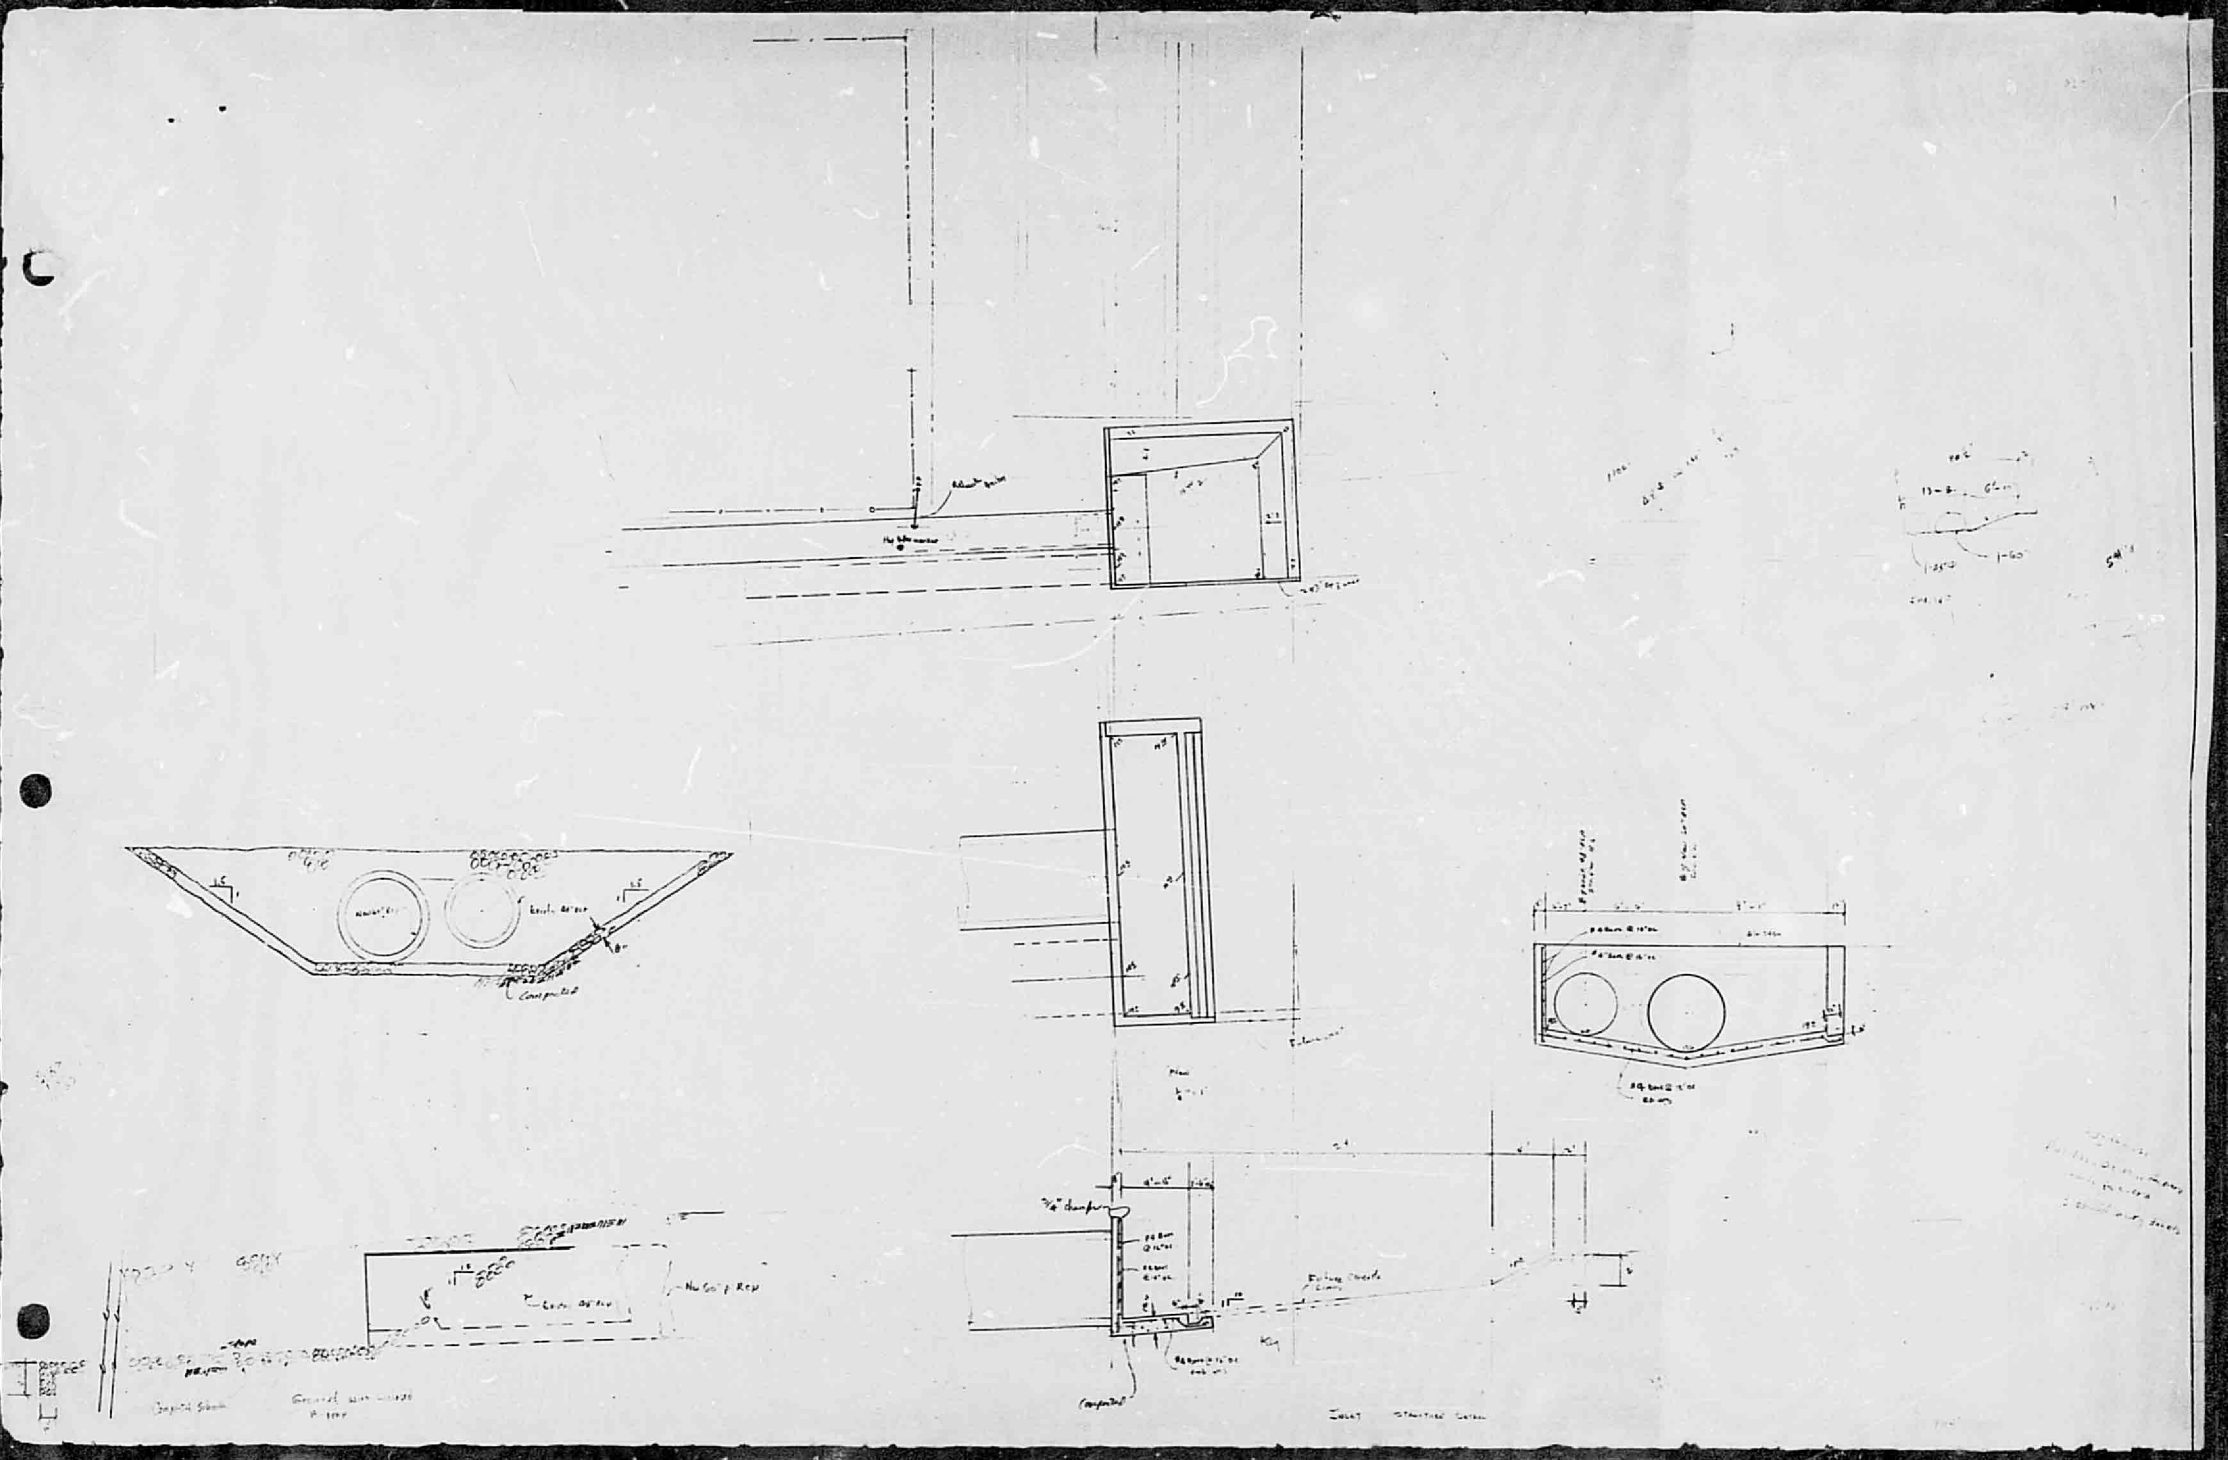
54" RCP class IV, complete in place in trench LF 150 x $78.54 = 11,781